


ASTM CATEGORY 4 : ENDURO AND TRAIL RIDING

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included

Minimum tyre size: width 52mm - pressure max. 2.35Bar/34PSI

REFERENCES WHEELS

Jante avant E-Crosstrail Carbone SL

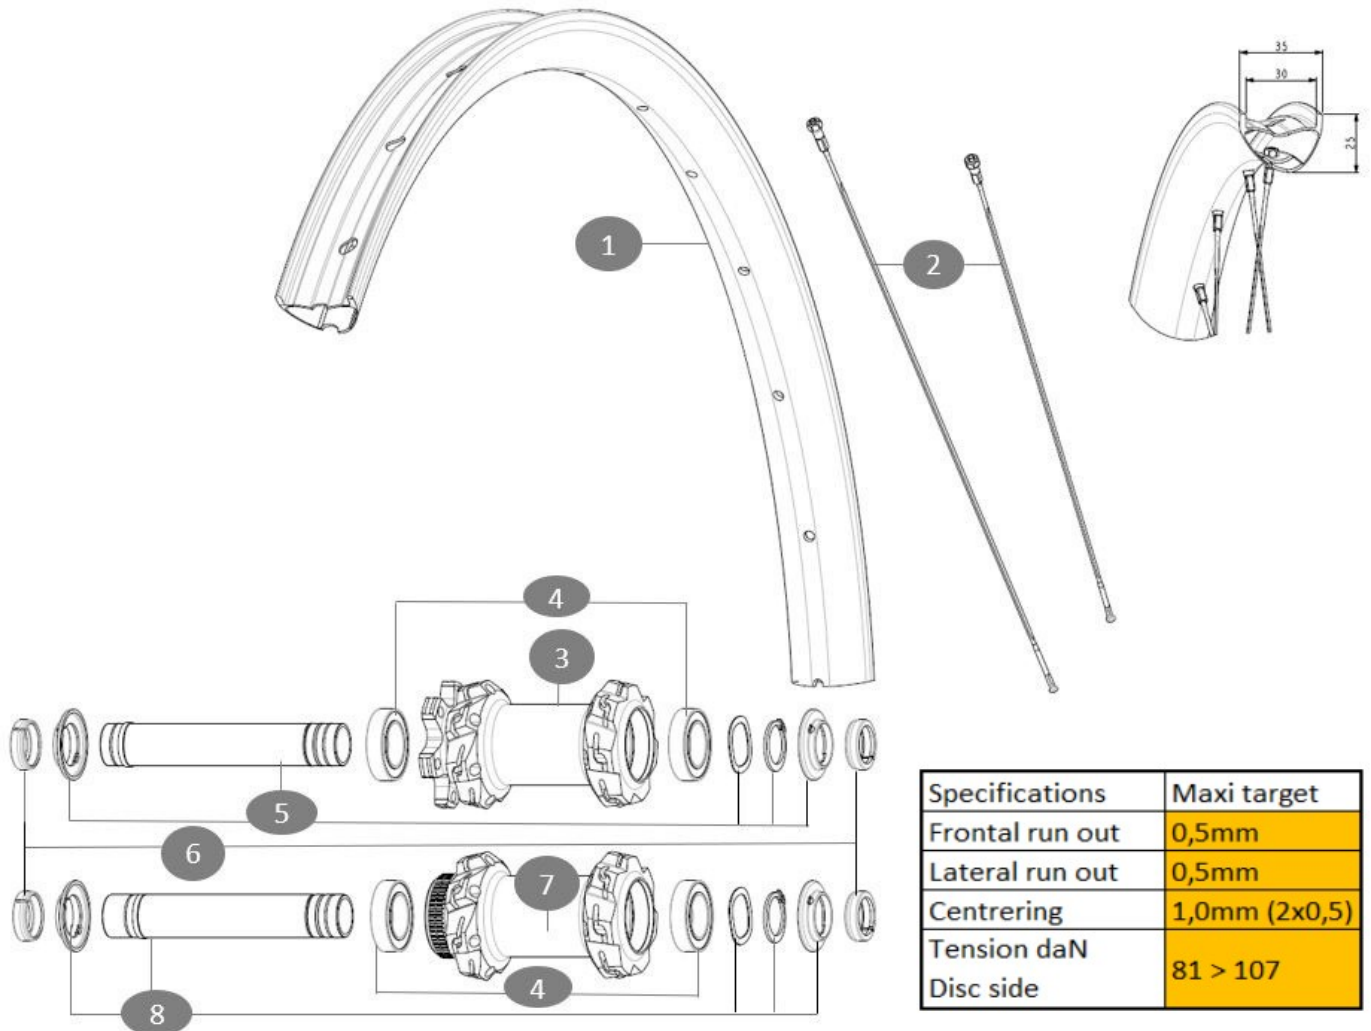

Specifications	Maxi target
Frontal run out	0,5mm
Lateral run out	0,5mm
Centring	1,0mm (2x0,5)
Tension daN	81 > 107
Disc side	

RIMS



&NBSP;:

1 V00101631 KIT FT/RR RIM E XTRAIL SL CARB

SPOKES

2 V00101731 KIT 14 BTD SPK298 EXTRAIL SL C

HUB SHELLS

3 N/A HUB BODY
4 V2500901 KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP
5 V2372401 KIT 110mm AXLE QRM AUTO MTB > 2019
7 N/A HUB BODY
8 V2375601 Kit 110mm axle QRM auto MTB from 2019 DCL

ADAPTERS

6 V2372501 15mm MTB Axle Cap QRM Auto From 2019



E-CROSSMAX XLR 29

DELIVERED WITH

UST valve and accessories (129 838 01)	
Pre-installed tubeless rim tape	
User guide	
2 replacement spokes with each wheel	

COMPATIBILITY

Freewheel body: convertible SHIMANO MS (kit V3990101 sold separately)	
Freewheel body: convertible SHIMANO HG MTB aluminium (kit V3780101 sold separately)	
Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately)	
Instant Drive 360 freewheel technology The new Instant Drive 360 freewheel system is super light and fast to engage with only 9°. A large contactless rubber seal provides low friction, while a wide array of end caps makes it super versatile.	

Specifications

RIMS

- **Material** : 100% carbon fiber with UDÂ² external layer
 - **Height** : 25 mm
 - **Internal width** : 30 mm
 - **Drilling** : traditional (front/rear 28 holes)
- Disc brake specific profile
- E-Bike specific rim profile
- **ETRTO size 29"** : 622x30TSS
 - **Tire** : clincher

SPOKES

- **Material** : steel
- **Shape** : j-bent, round, 2.0 straight gauge

WHEEL HUB

- **Body** : aluminum
- **Body design** : INFINITY
- **Disc standard** : 6 Bolts only
- **Axle material** : aluminum
- **Rear body** : aluminum
- **Axles** : Front 15X110 (Boost) or 15x100 ; Rear 12X148 (Boost) or 12x142
- **Front** : Quick release, 12x100 and 15x100 through axle compatible
- **Freewheel** : FTS-L steel

WHEEL WEIGHTS