


REFERENCES WHEELS

325667R-SYS SLR 013 FRT WTS



RIMS

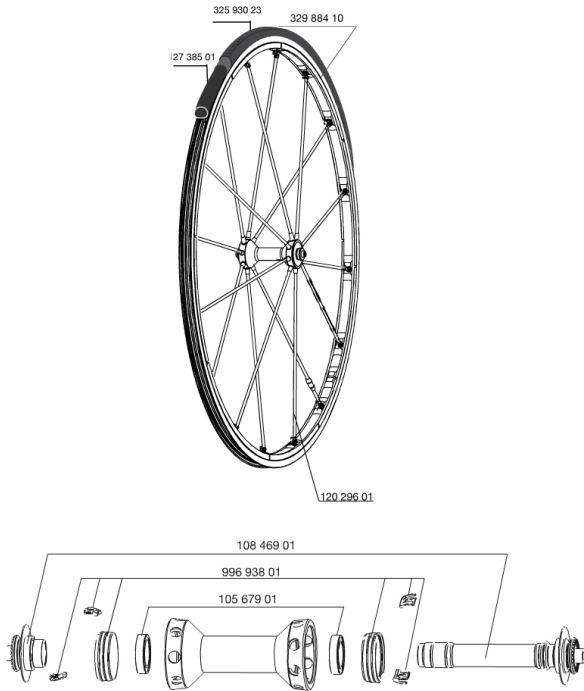

&NBSP;:

32988410KIT FRONT R-SYS SLR CLINCHER 2013 ISM3D RIM

SPOKES

12029601KIT 9 FT R-SYS SLR CLINC/TUB BLK SPK 285mm

996938012 SILVER TRACOMP RINGS + CLIPS

HUB SHELLS

10846901FRONT AXLE KIT R-SYS SL/SLR

10567901FRONT HUB QRM SL BEARINGS 15x24x5 6802

MAINTENANCE

12738501Road Innertube Presta 48mm

TYRES

32593023YksionProSSCGripLink 23

MAVIC

R-Sys SLR C

DELIVERED WITH

BR601 quick releases	
BR601 quick releases	
Wheelbags	
Wheelbags	
Computer magnet (front wheel)	
Computer magnet (front wheel)	
Multifunction adjustment wrench	
Multifunction adjustment wrench	
Tracomp ring tool	
Tracomp ring tool	
User guide	
User guide	

Specifications

RIMS

- **Material** : Maxtal
- **Material** : Maxtal
- **Height** : front 22 mm, rear 25 mm asymmetrical
- **Color** : Exalith
- **Height** : front 22 mm, rear 25 mm asymmetrical
- **Joint** : SUP
- **Drilling** : Fore
- **Joint** : SUP
- **Drilling** : Fore
- **Brake track** : Exalith 2
- **Weight reduction** : ISM 3D
- **Valve hole diameter** : 6.5 mm
- **Brake track** : Exalith 2
- **Weight reduction** : ISM 3D
- **Tyre** : clincher or tubular
- **Valve hole diameter** : 6.5 mm
- **Tyre** : clincher or tubular
- **ETRTO size** : 622x15C
- **ETRTO size** : 622x15C
- **Recommended tyre sizes** : 19 to 32 mm
- **Recommended tyre sizes** : 19 to 32 mm

SPOKES

- **Material** : carbon fiber (front and rear non drive side) and Zicral (rear drive side)

WHEEL HUB

- **Front and rear bodies** : aluminum
- **Front and rear bodies** : aluminum
- **Front and rear axle material** : aluminum
- **Color** : black
- QRM SL
- **Front and rear axle material** : aluminum
- FTS-L steel
- QRM SL
- FTS-L steel

WHEEL WEIGHTS

Wheel weight 555