


REFERENCES WHEELS

326598 CROSSMAX SLR 29 D6IFRT



RIMS

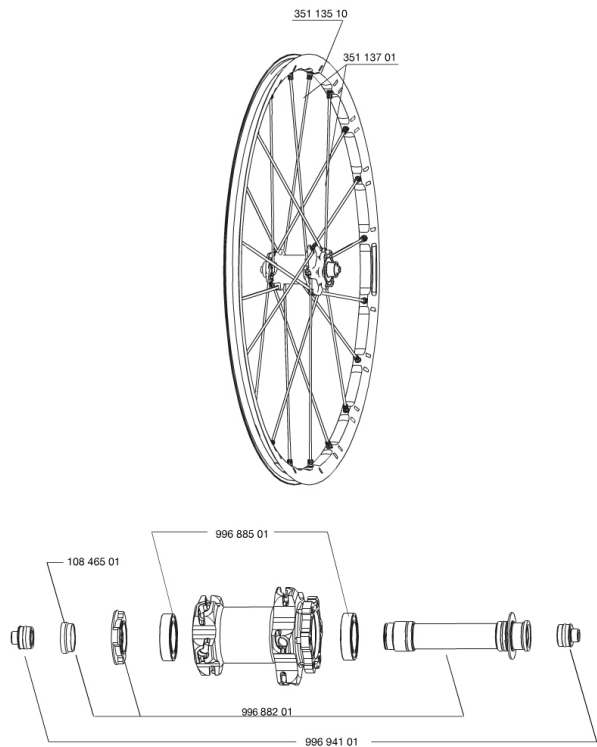

&NBSP;:

35113510	"KIT FRONT CROSSMAX SLR 29"" RIM"
----------	-----------------------------------

SPOKES

35113701	"KIT 10 FT/ND5 M7/7 XMAX SLR 29"" SPK 299,5mm"
----------	--

HUB SHELLS

99688201	9/15 6B FRT AXLE CROSSMAX/KSY PRO CARBON SL C
10846501	FRONT FORK SUPPORT FOR 15mm AXLE
99688501	BEARING KIT 9/12/15 D6T HUB 20x32x7 6804

ADAPTERS

99694101	ADAPTER Ft 15 to 9mm QR
----------	-------------------------

MAVIC

Crossmax SLR 29

DELIVERED WITH

BX601 quick releases	
Wheelbags	
UST valve and accessories	
Front QR adapters	
Rear QR adapters	
Rear 12x142mm adapters	
Specific disc bolts	
Computer magnet (front wheel)	
Multifonction adjustment wrench	
User guide	

Specifications

RIMS

- **Material** : Maxtal
 - **Color** : Double anodization, black rim, silver ISM
 - **Joint** : SUP
 - **Drilling** : Fore
- Disc brake specific profile
- **Weight reduction** : ISM 3D
 - **Valve hole diameter** : 6.5 mm
 - **Tyre** : UST Tubeless and tubetype
 - **Internal width** : 19 mm, asymmetrical
 - **ETRTO size** : 622x19C
 - **Recommended tyre sizes** : 1.5 to 2.3

SPOKES

- **Material** : Zicral
- **Shape** : straight pull, bladed
- **Color** : black + 1 half black / half white
- **Nipples** : integrated M7 aluminum with brake rings
- **Count** : 20 front and rear
- **Lacing** : front crossed 2, rear Isopulse

WHEEL HUB

- **Front and rear bodies** : oversize aluminum
 - **Color** : white
 - **Front and rear axle material** : aluminum
- QRM+
ITS-4 alloy

WHEEL WEIGHTS

Wheel weight 755