


REFERENCES WHEELS

326599 CROSSMAX SLR 29 D6iREAR



RIMS

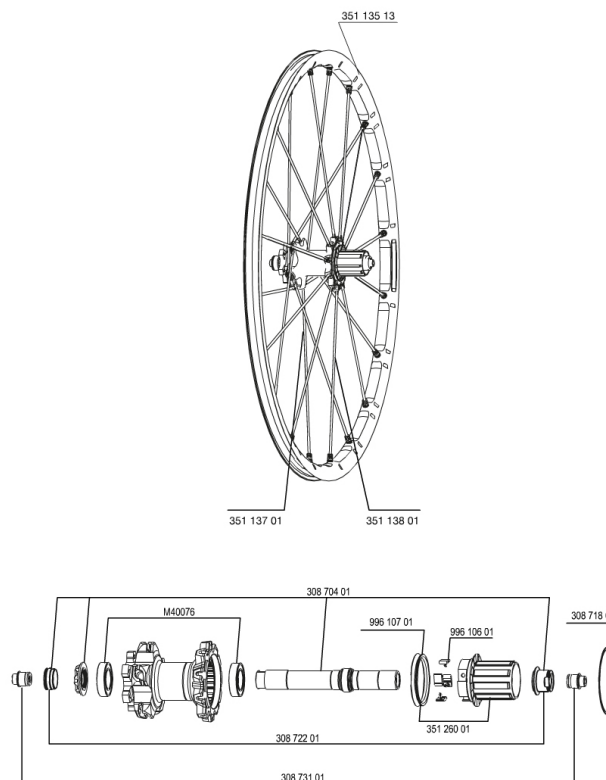

&NBSP;:

35113513	"KIT REAR CROSSMAX SLR 29"" RIM"
----------	----------------------------------

SPOKES

35113701	"KIT 10 FT/ND S M7/7 XMAX SLR 29"" SPK 299,5mm"
35113801	"KIT 10 DS M7/7 XMAX SLR/PRO 29"" SPK 269,5mm"

HUB SHELLS

35126001	ITS-4 FREEWHEEL BODY + SEAL 2013 (NO PAWLS)
30871801	ELASTIC RING 56mm diam. ITS-4 20 SPOKES
99610601	PAWLS KIT FOR ITS-4 (OR TS-2)
30870401	REAR QRM + AXLE KIT ITS4 135mm from 2012
M40076	HUB BEARINGS 17x30x7 6903 x 2
99610701	ITS-4 FREEWHEEL SEAL

ADAPTERS

30873101	2 REAR REDUCERS 12/9,5mm 2012 ITS4 HUB
30872201	FRAME SUPPORT ITS-4 135mm REAR AXLE > 2012

MAVIC

Crossmax SLR 29

DELIVERED WITH

BX601 quick releases	
Wheelbags	
UST valve and accessories	
Front QR adapters	
Rear QR adapters	
Rear 12x142mm adapters	
Specific disc bolts	
Computer magnet (front wheel)	
Multifonction adjustment wrench	
User guide	

Specifications

RIMS

- **Material** : Maxtal
 - **Color** : Double anodization, black rim, silver ISM
 - **Joint** : SUP
 - **Drilling** : Fore
- Disc brake specific profile
- **Weight reduction** : ISM 3D
 - **Valve hole diameter** : 6.5 mm
 - **Tyre** : UST Tubeless and tubetype
 - **Internal width** : 19 mm, asymmetrical
 - **ETRTO size** : 622x19C
 - **Recommended tyre sizes** : 1.5 to 2.3

SPOKES

- **Material** : Zicral
- **Shape** : straight pull, bladed
- **Color** : black + 1 half black / half white
- **Nipples** : integrated M7 aluminum with brake rings
- **Count** : 20 front and rear
- **Lacing** : front crossed 2, rear Isopulse

WHEEL HUB

- **Front and rear bodies** : oversize aluminum
 - **Color** : white
 - **Front and rear axle material** : aluminum
- QRM+
ITS-4 alloy

WHEEL WEIGHTS

Wheel weight 865