


REFERENCES WHEELS

354010 CROSSROC 26 FRT 15mm WTS



RIMS

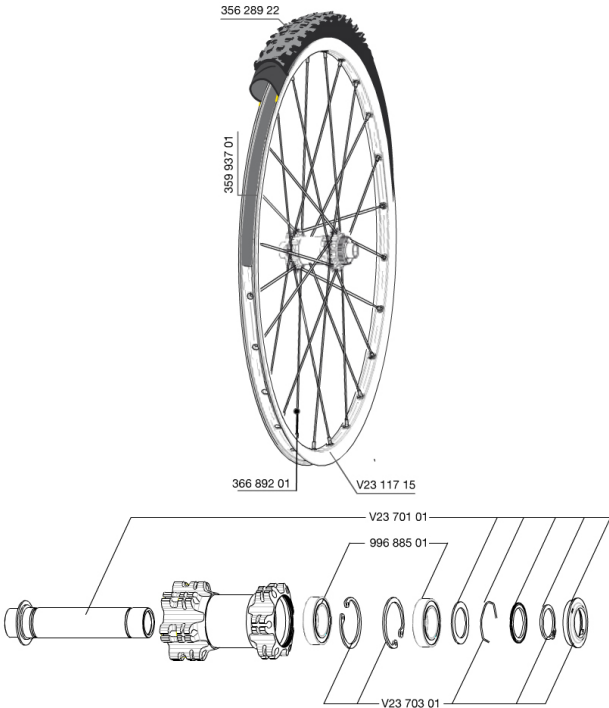

&NBSP;:

35993701	UST RIM STRIP 27.5x19c
V2311715	KIT FRONT/REAR CROSSROC 27,5"

SPOKES

36689201	"KIT 12 FT/NDS CROSSROC 27,5"" SPK 277mm"
----------	---

HUB SHELLS

V2370101	KIT FRONT AXLE 15MM CROSSONE/-RIDE/-ROC - while stock last
99688501	BEARING KIT 9/12/15 D6T HUB 20x32x7 6804
V2370301	KIT FRONT AUTO ADJUSTING PLAY 15mm AXLE

TYRES

35628922	Crossroc Roam 650b
----------	--------------------

MAVIC Crossroc WTS

DELIVERED WITH

BR101 rear quick release	
Tubeless rim tape	
Rim tape	
UST valve and accessories	
Rear QR adapters	
Valve reducer	
User guide	

Specifications

RIMS

- **Material** : 6106 Aluminum
- **Joint** : pinned
- **Drilling** : traditional with H2 reinforcement
Disc brake specific profile
- **Valve hole diameter** : 8,5 mm with pop off reducer
- **Tyre** : UST Tubeless and tubetype
- **Internal width** : 19 mm
- **ETRTO size 26"** : 559x19C
- **ETRTO size 650b/27.5"** : 584x19c
- **ETRTO size 29"** : 622x19C
- **Recommended tyre sizes** : 1.5 to 2.3

SPOKES

- **Material** : steel
- **Shape** : straight pull, bladed, double butted
- **Nipples** : brass, ABS
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2

WHEEL HUB

- **Front and rear bodies** : aluminum
 - **Axle material** : aluminum
- Sealed cartridge bearings
- **Freewheel** : TS-2 alloy

WHEEL WEIGHTS

Wheel weight
 Weight Front 26": 815
 Weight Front 27.5": 855
 Weight Front 29": 905