


RIMS

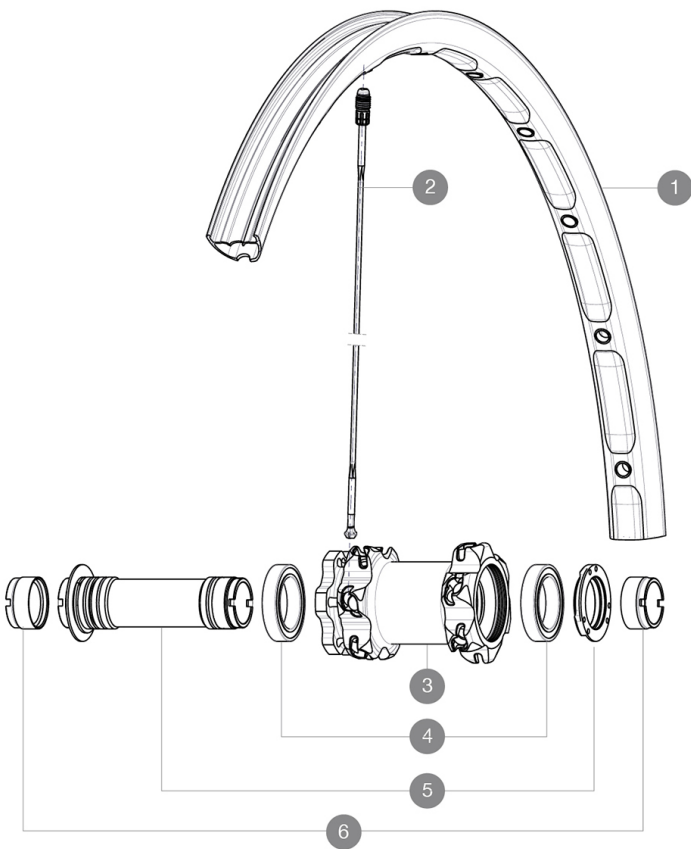

&NBSP;:

1	36646010	"FRONT CROSSMAX ENDURO 26"" RIM"
---	----------	----------------------------------

SPOKES

2	36646801	12 SPOKES FRONT CROSSMAX ENDURO 261,5mm
---	----------	---

HUB SHELLS

4	M40179	FRONT BEARING 25x37x7 20mm AXLE
5	30870501	FRONT AXLE 20mm CROSSMAX ST/SX + DEEMAX ULTI 2012

ADAPTERS

6	12982901	20mm adapter for Crossmax ST/SX (front wheel)
---	----------	---

MAVIC

Crossmax Enduro

付属品

BX601 rear quick release	
UST ⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘	
⌘⌘⌘⌘⌘⌘⌘ 15 mm⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘	
⌘⌘⌘⌘⌘⌘⌘⌘ 20 mm⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘	
⌘⌘⌘⌘ ⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘ ⌘⌘⌘⌘⌘⌘⌘⌘	
12x142 mm ⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘	
⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘	
⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘	
⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘	

Specifications

リム

⌘⌘⌘⌘ Maxtal⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘
⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘ SUP
⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘ FORE
⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘
⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘
⌘⌘⌘⌘⌘⌘⌘⌘ ISM
⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘ 6.5 mm
⌘⌘⌘⌘⌘⌘⌘⌘ UST
⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘
•⌘⌘⌘⌘ : ⌘⌘⌘⌘⌘⌘⌘⌘ 21 mm⌘⌘⌘⌘⌘⌘ 19mm
•ETRTO ⌘⌘⌘⌘⌘⌘ 26" : ⌘⌘⌘⌘⌘⌘⌘⌘ 559x21C⌘⌘
⌘⌘⌘⌘ 559x19c
•ETRTO ⌘⌘⌘⌘⌘⌘ 650b/27.5" : ⌘⌘⌘⌘⌘⌘⌘
584x21C ⌘⌘⌘⌘ 584x19c
⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘ 2.0⌘⌘ 2.5

スポーク

⌘⌘⌘⌘⌘⌘ ⌘⌘⌘⌘⌘⌘⌘⌘
⌘⌘⌘⌘⌘⌘ ⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘
⌘⌘⌘⌘⌘⌘⌘⌘⌘ ⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘ M7
⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘
⌘⌘⌘⌘⌘⌘ ⌘⌘⌘⌘⌘⌘⌘⌘ 24⌘⌘⌘⌘⌘⌘⌘ 20⌘⌘
⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘
⌘⌘⌘⌘⌘⌘⌘⌘/2⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘

ホイールハブ

⌘⌘⌘⌘⌘⌘⌘⌘/⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘
⌘⌘⌘⌘⌘⌘⌘⌘⌘/⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘⌘
⌘⌘⌘⌘⌘⌘
QRM+
ITS-4 ⌘⌘⌘⌘

ホイールの重み

ホイール重量 (クイックリリー
スおよびクリンチャー/チュー
ブラーを除く) (g) :
Weight Front 26": 825
Weight Front 27.5": 850