


## REFERENCES WHEELS

F02701 Ksyrium SLE Ft

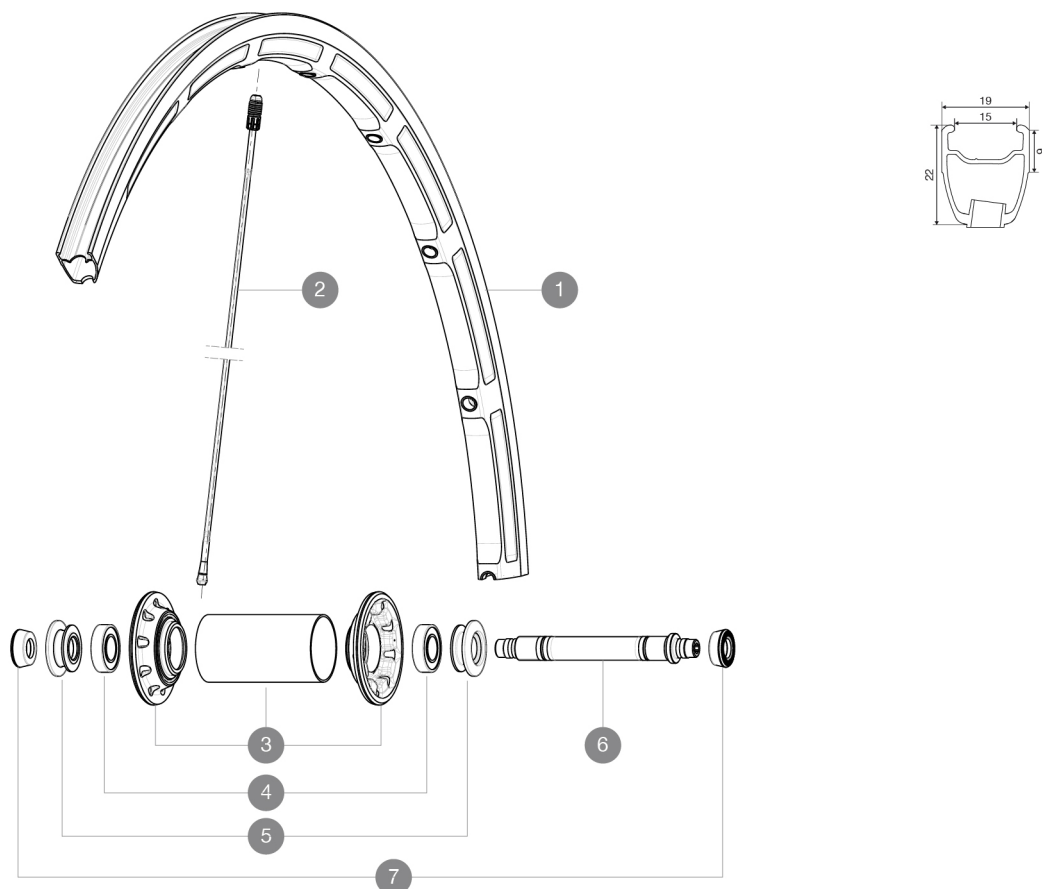

## RIMS


VALVE HOLE  $\varnothing$  (MM): 6.5 :

|   |          |                           |
|---|----------|---------------------------|
| 1 | V2290310 | KIT FRONT RIM KSYRIUM SLE |
|---|----------|---------------------------|

## SPOKES

|   |          |                                           |
|---|----------|-------------------------------------------|
| 2 | 33000301 | KIT 10 FT KSYRIUM SLS C/T BLK SPK 283,5mm |
|---|----------|-------------------------------------------|

## HUB SHELLS

|   |        |                                   |
|---|--------|-----------------------------------|
| 3 | N/A    | HUB BODY                          |
| 4 | M40078 | FRONT HUB BEARINGS 6901 x 2       |
| 5 | M40759 | ADJUSTING BEARING NUT + FRONT CAP |
| 6 | M40052 | FRONT HUB AXLE                    |
| 7 | M40063 | 2 FRONT AXLE FORK SUPPORT         |

# MAVIC Ksyrium SLE

## DELIVERED WITH

|                                 |  |
|---------------------------------|--|
| BR601 quick releases            |  |
| Exalith brake pads              |  |
| Computer magnet (front wheel)   |  |
| Multifunction adjustment wrench |  |
| User guide                      |  |

## Specifications

### RIMS

- **Material** : Maxtal
- **Height** : front 22 mm, rear 25 mm asymmetrical
- **Joint** : SUP
- **Drilling** : Fore
- **Brake track** : Exalith 2
- **Weight reduction** : ISM 3D
- **Valve hole diameter** : 6.5 mm
- **Tyre** : clincher
- **ETRTO size** : 622x15C
- **Recommended tyre sizes** : 19 to 32 mm

### SPOKES

- **Material** : Zicral
- **Shape** : straight pull, bladed, front double butted
- **Nipples** : Fore integrated aluminum
- **Count** : front 18, rear 20
- **Lacing** : front radial, rear Isopulse

### WHEEL HUB

- **Front body** : carbon with aluminum flanges
  - **Rear body** : aluminum
  - **Axle material** : aluminum
- Adjustable sealed cartridge bearings
- **Freewheel** : FTS-L steel

### WHEEL WEIGHTS

Wheel weight 605