


REFERENCES WHEELS



RIMS

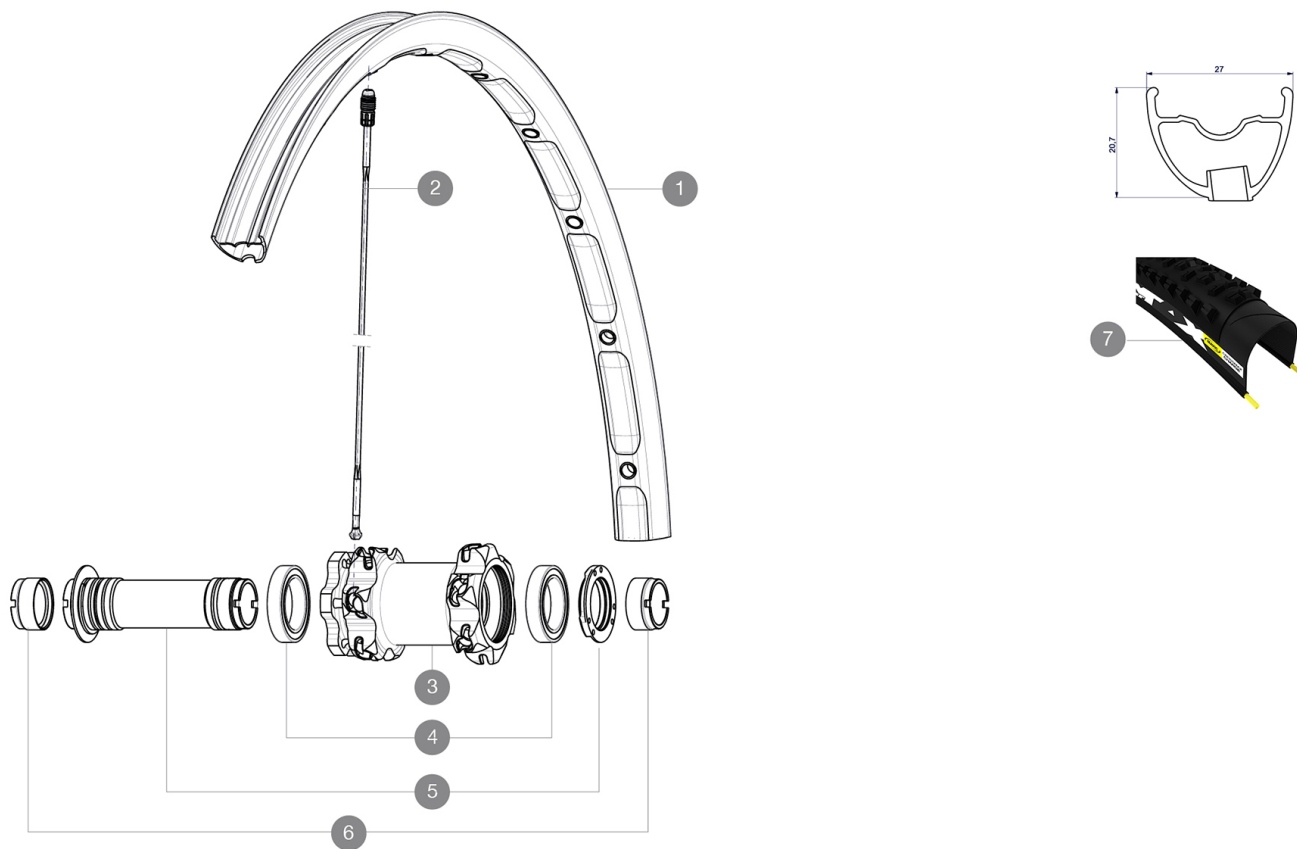

&NBSP;:

| | | |
|---|----------|--|
| 1 | 36692310 | "KIT FRONT CROSSMAX ENDURO 27,5"" RIM" |
|---|----------|--|

SPOKES

| | | |
|---|----------|--|
| 2 | 36674901 | KIT 12 FT XMAX END/FT-NDS DEEMAX PRO 27,5" ALU SPK 275mm |
|---|----------|--|

HUB SHELLS

| | | |
|---|----------|---|
| 3 | N/A | HUB BODY |
| 4 | M40179 | FRONT BEARING 25x37x7 20mm AXLE |
| 5 | 30870501 | FRONT AXLE 20mm CROSSMAX + DEEMAX ULTI 2012 |

TYRES

| | | |
|---|----------|----------------------|
| 7 | 35636424 | Crossmax Charge 650b |
|---|----------|----------------------|

ADAPTERS

| | | |
|---|----------|---------------------|
| 6 | 12982901 | ADAPTER Ft 20x110mm |
|---|----------|---------------------|

MAVIC *Crossmax Enduro 27.5 WTS***DELIVERED WITH**

| | |
|---------------------------------|--|
| BX601 rear quick release | |
| UST valve and accessories | |
| Front 15 mm adapters | |
| Front 20 mm adapters | |
| Rear QR adapters | |
| Rear 12x142mm adapters | |
| Specific disc bolts | |
| Multifonction adjustment wrench | |
| User guide | |

Specifications**RIMS**

- **Material** : Maxtal
 - **Joint** : SUP
 - **Drilling** : Fore
- Disc brake specific profile
- **Weight reduction** : ISM
 - **Valve hole diameter** : 6.5 mm
 - **Tyre** : UST Tubeless and tubetype
 - **Internal width** : 21 mm front and 19mm rear
 - **ETRTO size 26"** : 559x21C front & 559x19C rear
 - **ETRTO size 650b/27.5"** : 584x21C front & 584x19C rear
 - **Recommended tyre sizes** : 2.0 to 2.5

SPOKES

- **Material** : Zicral
- **Shape** : straight pull, bladed
- **Nipples** : Fore integrated aluminum
- **Count** : 24 front and 20 rear
- **Lacing** : front crossed 2, rear Isopulse

WHEEL HUB

- **Front and rear bodies** : aluminum
 - **Axle material** : aluminum
- Adjustable sealed cartridge bearings
- **Freewheel** : ITS-4 alloy
- Shimano 11 speeds compatible
XD Compatible (XX1-X01) with optionnal kit

WHEEL WEIGHTS

Weight Front 26": 825
Weight Front 27.5": 850