


REFERENCES WHEELS



RIMS

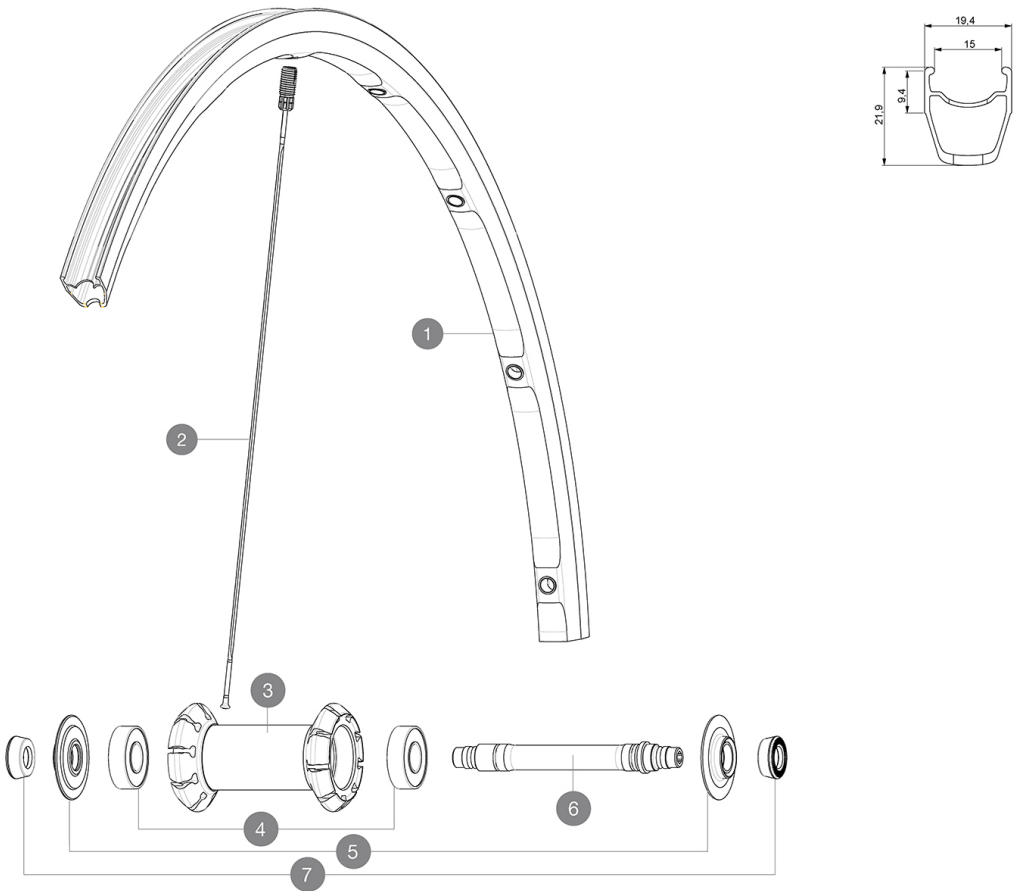

&NBSP;:

|   |          |                                            |
|---|----------|--------------------------------------------|
| 1 | V2400410 | KIT FRONT KSYRIUM ELITE RED S BLACK RIM    |
| 1 | 33002310 | KIT FRONT KSYRIUM ELITE S BLACK/SILVER RIM |

SPOKES

|   |          |                                             |
|---|----------|---------------------------------------------|
| 2 | V2270701 | KIT 9 FRONT KSYRIUM ELITE S RED SPOKE 284mm |
| 2 | 33002701 | KIT 9 FT KSYRIUM ELITE S BLK SPK 285,5mm    |

HUB SHELLS

|   |          |                                         |
|---|----------|-----------------------------------------|
| 3 | N/A      | HUB BODY                                |
| 3 | N/A      | HUB BODY                                |
| 4 | M40318   | KIT 2 HUB BEARINGS 6001                 |
| 5 | 12038201 | KSYRIUM ELITE HUB CAP AND ADJUSTING NUT |
| 6 | 99686101 | KSYRIUM ELITE 09 FRONT AXLE             |
| 7 | M40063   | 2 FRONT AXLE FORK SUPPORT               |

MAVIC

Ksyrium Elite S

DELIVERED WITH

|                                 |  |
|---------------------------------|--|
| BR301 quick releases            |  |
| Multifunction adjustment wrench |  |
| User guide                      |  |

Specifications

RIMS

- **Material** : Maxtal
- **Height** : front 22 mm, rear 25 mm asymmetrical
- **Joint** : SUP
- **Drilling** : Fore
- **Brake track** : UB Control
- **Weight reduction** : ISM
- **Valve hole diameter** : 6.5 mm
- **Tyre** : clincher
- **ETRTO size** : 622x15C
- **Recommended tyre sizes** : 19 to 32 mm

SPOKES

- **Material** : steel
- **Shape** : straight pull, bladed, front double butted
- **Nipples** : Fore integrated aluminum
- **Count** : front 18, rear 20
- **Lacing** : front radial, rear Isopulse

WHEEL HUB

- **Front and rear bodies** : aluminum
  - **Axle material** : aluminum
- Adjustable sealed cartridge bearings
- **Freewheel** : FTS-L steel

WHEEL WEIGHTS

Wheel weight 680