




## RIMS

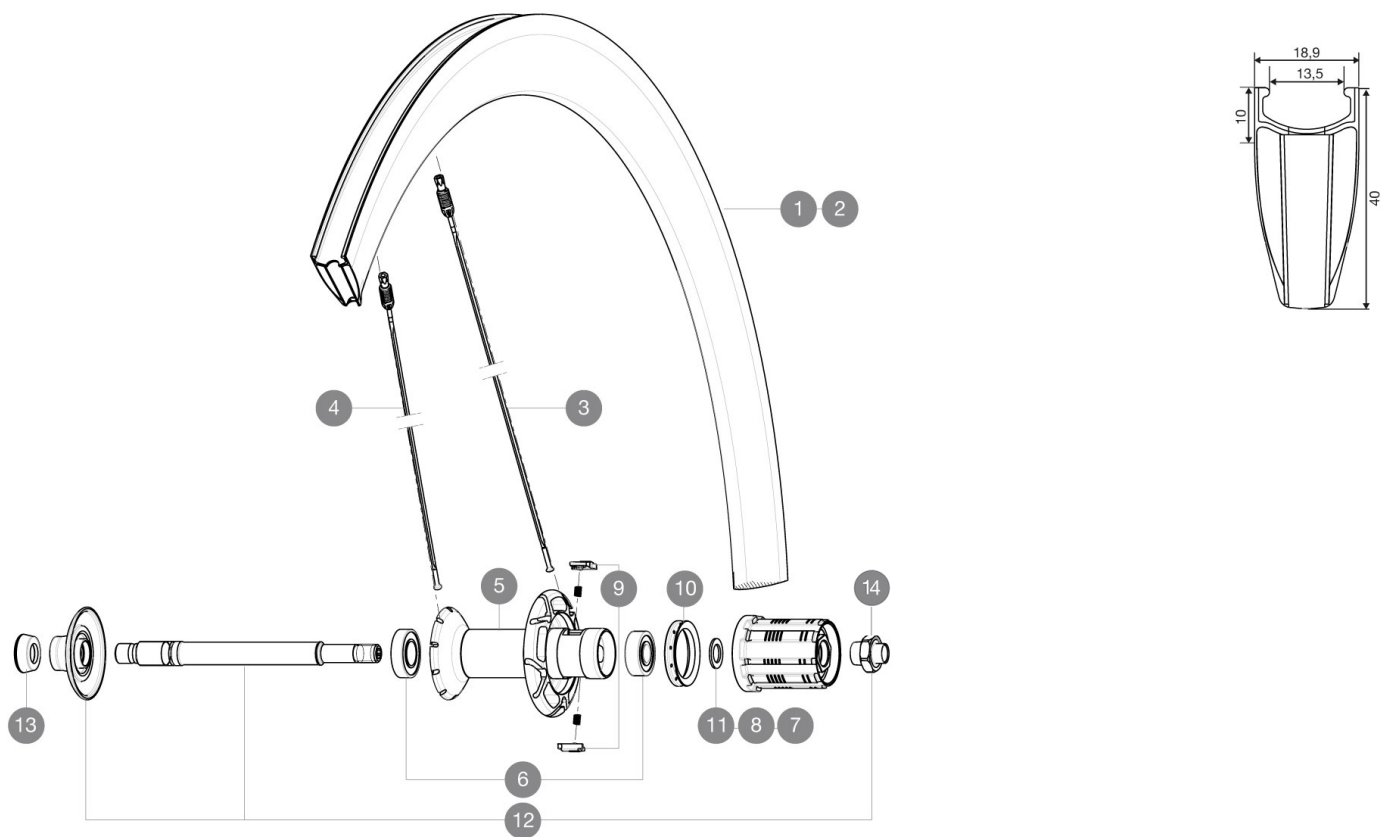

バルブ穴径 (MM) : 6.5 :

|   |          |                            |
|---|----------|----------------------------|
| 1 | V2400713 | REAR RIM CC 40 ELITE WHITE |
| 2 | V2400913 | REAR RIM CC 40 ELITE BLACK |

## SPOKES

|   |          |                                                              |
|---|----------|--------------------------------------------------------------|
| 3 | 32978901 | KIT 10 AERO DS CC 40 C BLACK SPOKE 275mm - while stock last  |
| 3 | V3664101 | KIT 12 DRIVE SIDE STAINLESS SPOKE CC40 C 275mm               |
| 4 | 32979001 | KIT 10 AERO FT/NDS CC 40 C BLACK SPOKE 277mm - while stock l |
| 4 | V3664201 | KIT 12 FRT/NDS STAINLESS SPOKE CC40 C 277mm                  |

## HUB SHELLS

|    |          |                                                           |
|----|----------|-----------------------------------------------------------|
| 5  | N/A      | HUB BODY                                                  |
| 6  | 33000001 | REAR HUB B9+6901 BEARINGS 2013                            |
| 7  | 30871101 | FTS-L FREEWHEEL BODY HG11 2013 (8 or 9mm axle compatible) |
| 8  | 30871201 | FTS-L FREEWHEEL BODY ED11 2013 (8 or 9mm axle compatible) |
| 9  | M40578   | FTSL PAWLS KIT (ROAD WHEELS)                              |
| 10 | 99500001 | FTSL/FTSX FREEHUB BODY SEAL                               |
| 11 | 30872801 | SET OF 3 INTERNAL SILVER SPACERS 9mm FTS-L 2013           |
| 12 | V2250301 | KIT REAR AXLE AERO HUB CXR/CC40/CC SLS/CC SLE/COSMIC      |
| 14 | V2373101 | KIT NUT FOR ROAD ALLOY THROUGH AXLE 9mm                   |

## ADAPTERS

|    |          |                                        |
|----|----------|----------------------------------------|
| 13 | 35117301 | FRONT OR REAR FORK REST KIT R-SYS 2013 |
|----|----------|----------------------------------------|



# Cosmic Carbone 40 Elite

## 付属品

|                                 |  |
|---------------------------------|--|
| BR301 quick releases            |  |
| Carbon brake pads               |  |
| Multifonction adjustment wrench |  |
| User guide                      |  |

## Specifications

### リム

- Material : 3K carbon fibers with aluminum reinforced rim bed
- Height : 40 mm
- Drilling : co-molded Fore drilled inserts
- Brake track : carbon
- Brake track : carbon with TgMAX technology
- Valve hole diameter : 6.5 mm
- Tyre : clincher
- ETRTO size : 622x13C
- Recommended tyre sizes : 19 to 28 mm

### スポーク

- Material : steel
- Shape : straight pull, bladed, double butted
- Nipples : Fore integrated aluminum
- Count : front 16, rear 20
- Lacing : radial front and rear non-drive side, crossed 2 rear drive side

### ホイールハブ

- Front and rear bodies : aluminum
- Axle material : aluminum
- Adjustable sealed cartridge bearings
- Freewheel : FTS-L steel

### ホイールの重み

ホイール重量 ( クイックリリース  
スおよびクリンチャー/チュー  
ブラーを除く ) ( g ) : 875