

参照ホイール

R72801 AKSIUM RB 700 QR ED11

ASTM CATEGORY 1 : road only

23mm -


8Bar/115PSI

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included

Recommended tyre sizes: 25 to 52 mm

23mm 8.7 bars - 125 psi, 25mm 7.7 bars - 110 psi

52mm - 5Bar/72PSI

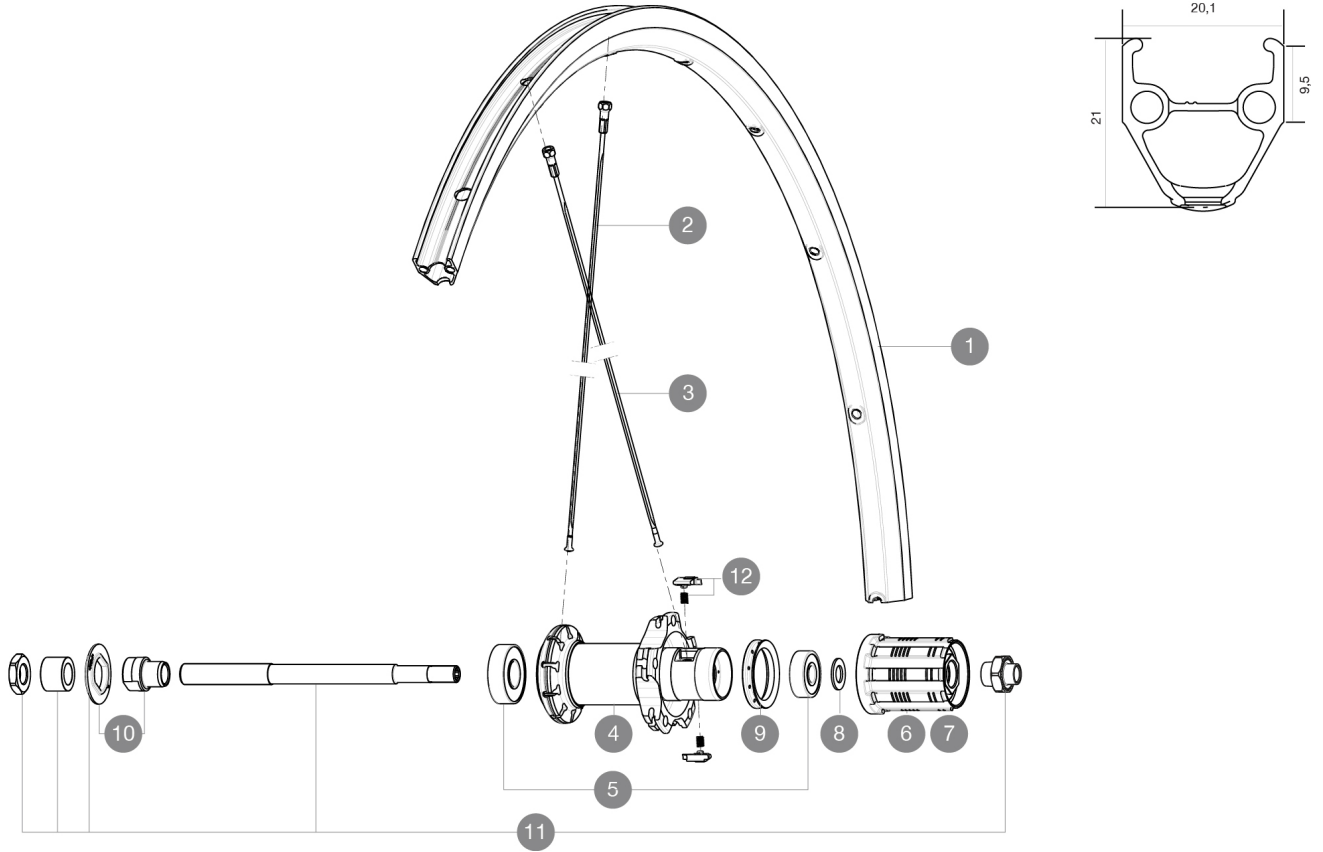

RIMS



バルブ穴径 (MM) : 6,5 :

|   |          |                           |
|---|----------|---------------------------|
| 1 | V2403015 | KIT FRONT/REAR RIM AKSIUM |
|---|----------|---------------------------|

SPOKES

|   |          |                                                              |
|---|----------|--------------------------------------------------------------|
| 2 | 10844901 | KIT 10 FT KSYRIUM EQ S/FT+NDS AKSIUM SPK 285mm - while stock |
| 2 | V4160101 | Kit 10 stainless spokes 285 Ft Ksyrium Equipe S/Ft & NDS Aks |
| 3 | 10845001 | 10 BLACK REAR FW AKSIUM 010 SPOKES 298mm                     |

HUB SHELLS

|    |          |                                                           |
|----|----------|-----------------------------------------------------------|
| 5  | M40660   | REAR HUB 608+6001 BEARINGS                                |
| 6  | 30871101 | FTS-L FREEWHEEL BODY HG11 2013 (8 or 9mm axle compatible) |
| 7  | 30871201 | FTS-L FREEWHEEL BODY ED11 2013 (8 or 9mm axle compatible) |
| 8  | M40067   | 10 SPACERS FRW/HUB BODY                                   |
| 9  | 99500001 | FTSL/FTSX FREEHUB BODY SEAL                               |
| 10 | 99603801 | SHORT EXPENSIBLE BEARING SUPPORTS > 2008                  |
| 11 | 99603901 | REAR AXLE KSYRIUM EQUIPE 08                               |
| 12 | M40578   | FTSL PAWLS KIT (ROAD WHEELS)                              |

