


ASTM CATEGORY 1 : road only
 For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included

参照ホイール

F33301 CosmicUlti16Ft

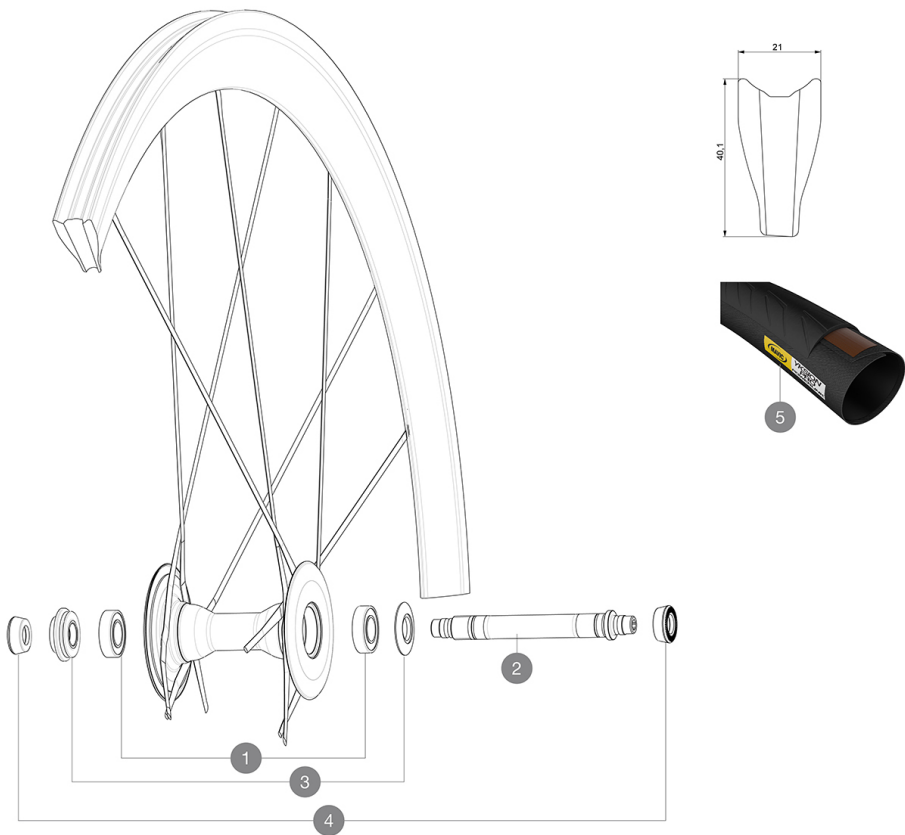

HUB SHELLS

1	M40078	FRONT HUB 6901 BEARINGS
2	36645801	FRONT AXLE COS.CARBONE ULTIMATE from 2014
3	36645901	FRONT ADJUST.NUT+CAP COS.CARB.ULTIMATE from 2014

TYRES

5	37804425	Yksion Pro GripLink Tubular SSC 25
---	----------	------------------------------------

ADAPTERS

4	35117301	FRONT OR REAR FORK REST KIT R-SYS 2013
---	----------	--



Cosmic Ultimate

付属品

BR601 Titanium quick releases	
Carbon brake pads	
Multifonction adjustment wrench	
User guide	

Specifications

リム

- Material : 100% woven 12K carbon fiber
- Height : 40 mm
- Drilling : no holes, spokes molded to the rim
- Brake track : carbon with TgMAX technology
- Valve hole diameter : 6.5 mm
- Tyre : tubular
- ETRTO size : 28" tubular
- Recommended tyre sizes : 21 to 28 mm

スポーク

- Material : unidirectional carbon fiber
- Shape : R2R
- Nipples : brass, ABS
- Count : 20 front and rear
- Lacing : crossed 2 front and rear drive side, radial non drive side

ホイールハブ

- Front body : Front 100% carbon
- Rear body : aluminum
- Axle material : aluminum
- Adjustable sealed cartridge bearings
- Freewheel : FTS-L steel

ホイールの重み

ホイール重量 (クイックリリース
スおよびクリンチャー/チュー
ブラーを除く) (g) : 520