


参照ホイール

F32601 IOFt1

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included

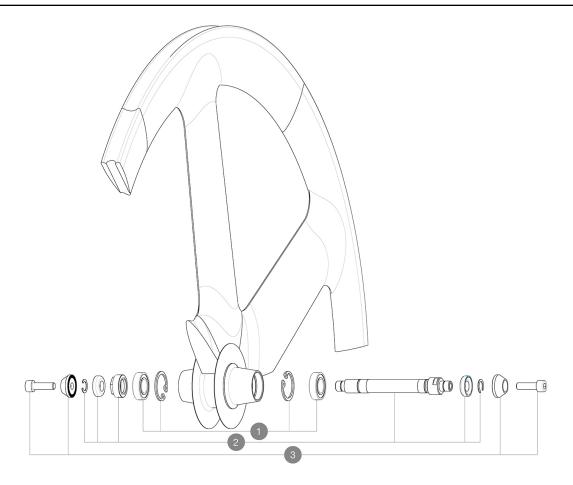

HUB SHELLS

| 1 | M40131 | KIT BEARINGS FRONT 12x24x6 6901 (IO track) |
|---|--------|--|
| 2 | M40130 | FRONT IO AXLE + ADJUSTING NUT |
| 3 | M40124 | M6 AXLE BOLTS FRT TRACK WHEEL |



付属品

| Fixing nuts | |
|----------------|--|
| Wheelbag | |
| Valve extender | |
| User guide | |

Specifications

リム

•Tyre: tubular •Recommended tyre sizes: 21 to 28 mm

ホイールハブ

Body: aluminum
 Axle material: aluminum
Sealed cartridge bearings

ホイールの重み

ホイール重量(クイックリリー スおよびクリンチャー/チュー ブラーを除く)(g):