



## Cosmic Carbone 40 T

ASTM CATEGORY 2: road and offroad with jumps less than 15cm For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included

参照ホイール

F33501 CosmicCarb40TFt

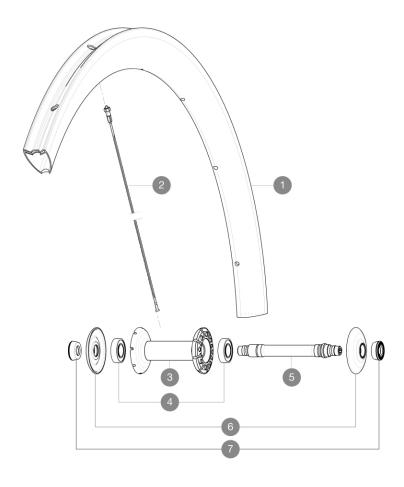



#### **RIMS**



バルブ穴径(MM):6,5:

1 36645510 FRONT RIM CC 40 T

#### **SPOKES**

2 36645101 10 BLK AERO SPOKES FRONT/NON DRIVE SIDE CC 40 T 272mm

## **HUB SHELLS**

| 3 | N/A      | HUB BODY                          |
|---|----------|-----------------------------------|
| 4 | M40078   | FRONT HUB 6901 BEARINGS           |
| 5 | 30870001 | FRONT AXLE ROAD RIM BRAKING QRM + |
| 6 | 32985701 | HUB CAP & ADJUST.NUT CXR 80       |

#### **ADAPTERS**

7 35117301 FRONT OR REAR FORK REST KIT R-SYS 2013



# MAVIC Cosmic Carbone 40 T

#### 付属品

| BR601 quick releases            |  |
|---------------------------------|--|
| Carbon brake pads               |  |
| Multifonction adjustment wrench |  |
| User guide                      |  |

## Specifications

#### リム

 Material: 100% Unidirectional carbon fiber
 Height: 40 mm
 Drilling: traditional Brake track: carbon
 Valve hole diameter: 6.5 mm
 Tyre: tubular

•ETRTO size : 28" tubular

•Recommended tyre sizes: 21 to 32 mm

#### スポーク

Material: steel
 Shape: straight pull, bladed, double butted
 Nipples: brass, ABS

Count: front 16, rear 20
•Lacing: radial front and rear non-drive side, crossed 2 rear drive side

#### ホイールハブ

• Front and rear bodies : carbon center tube and

aluminum flanges
•Axle material : aluminum Adjustable sealed cartridge bearings
• Freewheel : FTS-L steel

#### ホイールの重み

ホイール重量(クイックリリー スおよびクリンチャー/チュー ブラーを除く)(g): 635