


ASTM CATEGORY 1 : road only
 Recommended weight limit : 120kg
 Recommended tyre sizes: 21 to 28 mm
 Max. Pressure: 23mm 8.7 bars - 125 psi
 Max. Pressure: see indication on wheel and tyre. If they differ, use the lower of the 2
 Minimum cog width : 7.5mm
 Minimum cog width : 7.5mm

REFERENCES WHEELS

F71771	COMETE TRACK T 700	F32701	CometeTrack16Ft
--------	--------------------	--------	-----------------

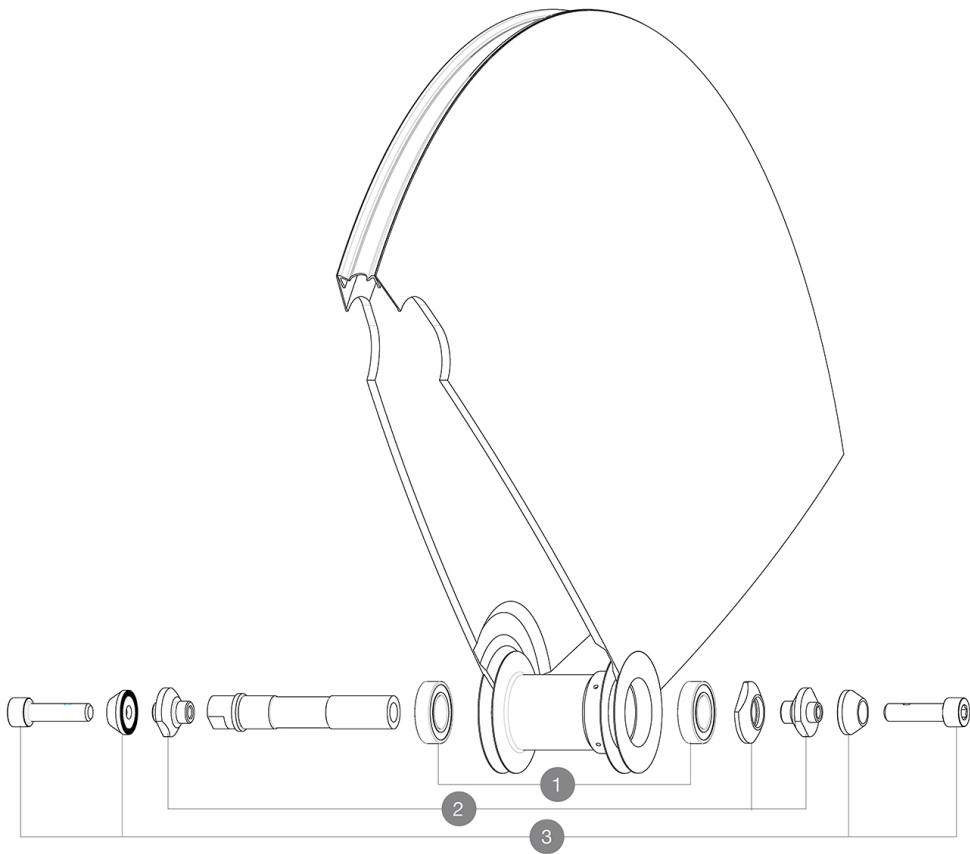

HUB SHELLS

1	M40129	KIT 2 BEARINGS 6902 15x28x7
2	11188701	COMETE FRONT AXLE TRACK
3	M40124	M6 AXLE BOLTS/ALU SUPPORTS FRT IO TRACK



COMETE TRACK

DELIVERED WITH

Fixing nuts	
Wheelbag	
Valve extender	
Fixing nuts	
Fixing nuts	
Fixing nuts	
Fixing nuts	
Cog lock nut	
Fixing nuts	
Fixing nuts	
User guide	
Valve extender	
Valve extender	
Valve extender	
Valve extender	
Valve extender	
Valve extender	
Valve extender	

COMPATIBILITY

ID360 Shimano / Sram Light freewheel body ([V3850101])	
ID360 XD-R freewheel body ([V2580101])	
FTS-L Shimano / Sram freewheel body ([30871101] - Delivered on the wheel)	