


ASTM CATEGORY 3 : offroad with jumps less than 61cm  
Recommended weight limit : 120kg  
Recommended tire sizes: 35 mm to 69 mm (1.4" to 2.7")

## REFERENCES WHEELS



## RIMS

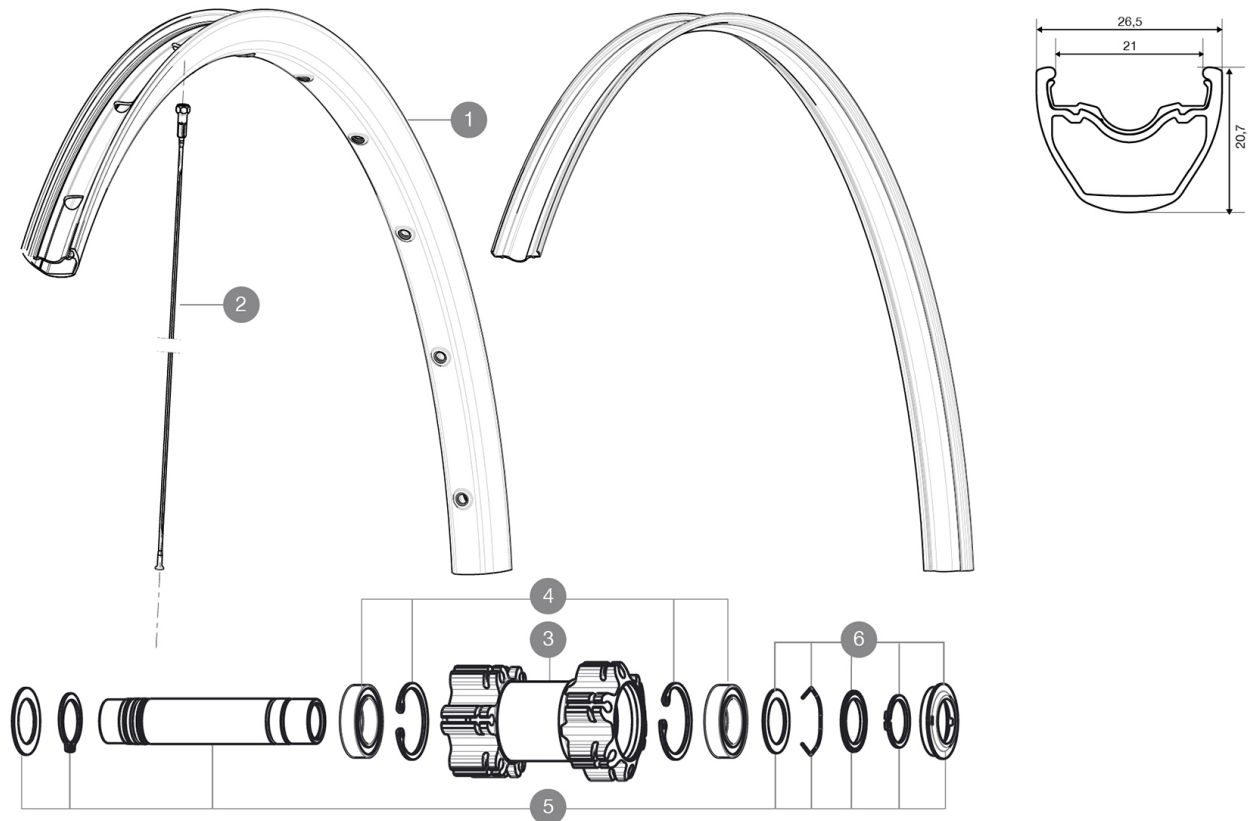

VALVE HOLE (MM): 6,5 :

|   |          |                                             |
|---|----------|---------------------------------------------|
| 1 | V2314115 | "KIT FRONT/REAR RIM CROSSRIDE TUBELESS 26"" |
|   | V2170101 | UST RIM STRIP 26x21c                        |

## SPOKES

|   |          |                                          |
|---|----------|------------------------------------------|
| 2 | V2381001 | KIT 12 NDS CROSSRIDE UST 26" SPOKE 265mm |
|---|----------|------------------------------------------|

## HUB SHELLS

|   |          |                                                            |
|---|----------|------------------------------------------------------------|
| 3 | N/A      | HUB BODY                                                   |
| 4 | 99688501 | BEARING KIT 9/12/15 D6T HUB 20x32x7 6804                   |
| 5 | V2371101 | KIT FRONT QRM AXLE 100mm/BOOST 110mm                       |
| 5 | V2370101 | KIT FRONT AXLE 15MM CROSSONE/-RIDE/-ROC - while stock last |
| 6 | V2370301 | KIT FRONT AUTO ADJUSTING PLAY 15mm AXLE                    |



# Crossride Tubeless Pulse 26

2016  
FRONT

DELIVERED WITH

|                                                                                           |                                                                                   |
|-------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| 1 bottle of Mavic Sealant<br>(355 466 01)<br>1                                            |  |
| Rear 12x142mm adapters for ITS4 and TS2<br>(308 593 01 for ITS4, 329 650 01 for TS2)<br>1 |  |
| UST valve and accessories<br>(129 838 01)                                                 |  |
| Valve reducer<br><br>x10                                                                  |  |
| Tubeless rim tape                                                                         |                                                                                   |
| User guide                                                                                |                                                                                   |

COMPATIBILITY

|                                                                                     |  |
|-------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to XD with optional driver body                |  |
| Front axle: convertible from 15mm thru axle to Quick Release with optional adapters |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters      |  |

Specifications

RIMS

- **Material** : S6000 Aluminum
- **Joint** : sleeved
- **Drilling** : traditional with H2 reinforcement  
Disc brake specific profile
- **Valve hole diameter** : 8,5 mm with pop off reducer
- **Tire** : UST Tubeless and tubetype
- **Internal width** : 21 mm
- **ETRTO size 26"** : 559x21C
- **ETRTO size 27.5"** : 584x21C
- **ETRTO size 29"** : 622x21C

SPOKES

- **Material** : steel
- **Shape** : straight pull, bladed, double butted
- **Nipples** : steel, ABS
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2

WHEEL HUB

- **Front and rear bodies** : aluminum
- **Axle material** : aluminum  
Sealed cartridge bearings
- **Freewheel** : TS-2 alloy

VERSIONS

- **Color** : Black only
- **Disc standard** : 6 Bolts only
- **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)

WHEEL WEIGHTS

Wheel weight  
Weight Front 27.5": 875  
Weight Front 29": 920