


ASTM CATEGORY 3 : offroad with jumps less than 61cm

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included

参照ホイール

F42801	XmaxSLPro27.5SpxFtWTSBk	F27801	XmaxSLPro27.5FtWTS Black
F42802	XmaxSLProLtd27.5SpxWTSYellow	F55801	XmaxSLPro27.5FtNT Bk
F27802	XmaxSLProLtd27.5FtWTS Yellow		

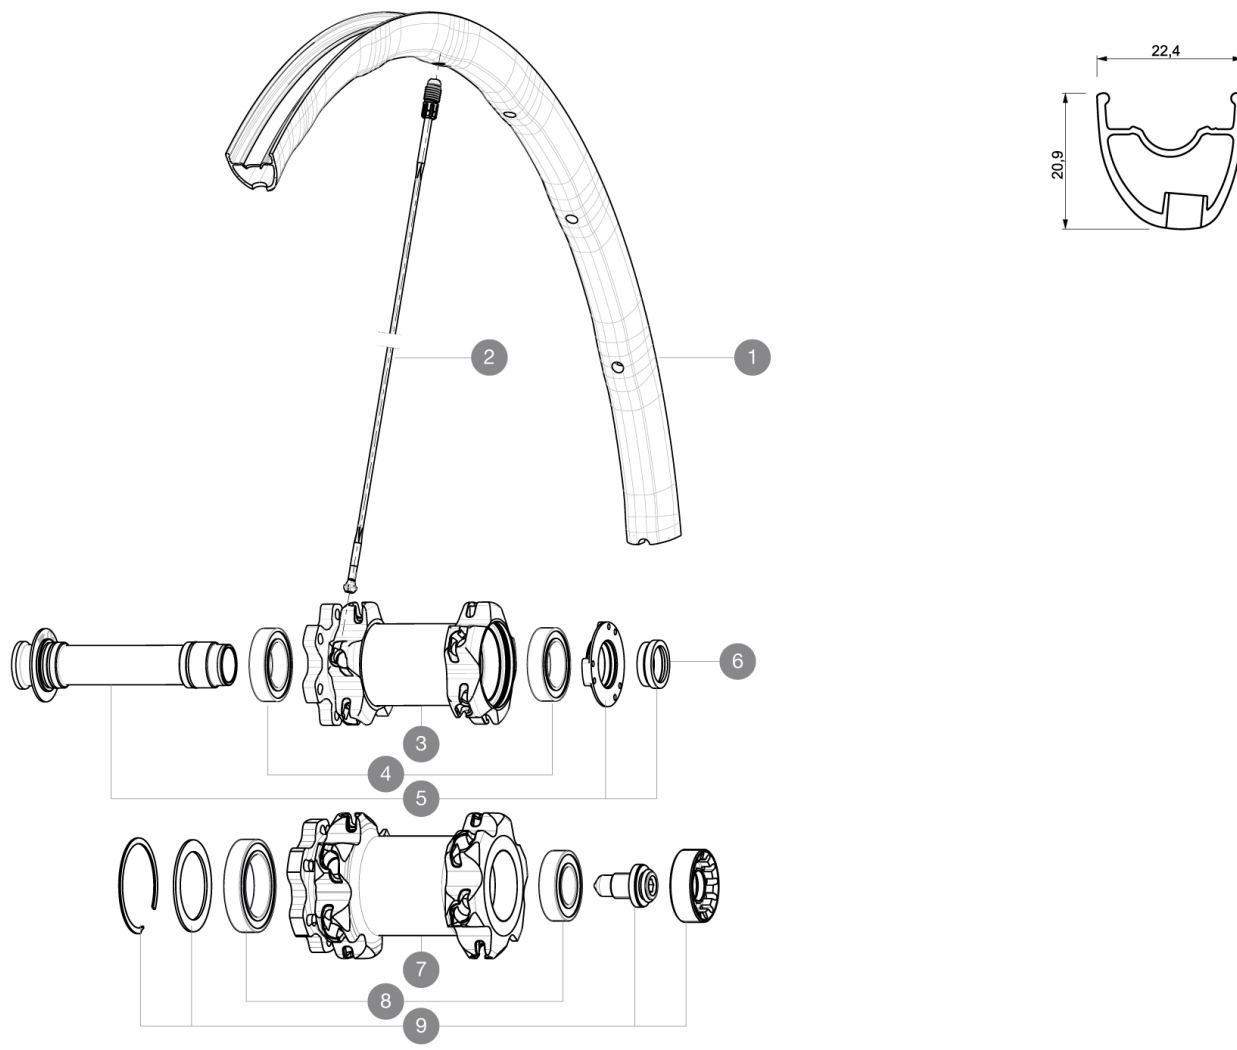

RIMS



バルブ穴径 (MM) : 6,5 :

1	V2313010	FRONT RIM CROSSMAX SL PRO LTD YELLOW 27,5
1	V2310210	KIT FRONT RIM CROSSMAX SL 2015 27,5"

SPOKES

2	36675001	"10 SPOKES OPP DRIVE SIDE CROSSMAX SLR/ENDURO 650b/27,5"" 28
---	----------	---

HUB SHELLS

3	N/A	HUB BODY
4	99688501	BEARING KIT 9/15 D6T HUB
5	99688201	9/15 D6T HUB FRONT AXLE
6	10846501	FRONT FORK SUPPORT FOR 15mm AXLE
7	N/A	HUB BODY
7	N/A	HUB BODY
8	M40771	BEARING KIT FOR LEFTY HUB
9	36709301	ASSEMBLY KIT CROSSROC SUPERMAX



Crossmax SL Pro WTS 27.5

付属品

1 bottle of Mavic Sealant	
BX601 quick releases	
UST valve and accessories	
Front QR adapters	
Rear QR adapters	
Rear 12x142mm adapters	
Multifunction adjustment wrench	

Specifications

リム

- Material : Maxtal
 - Joint : SUP
 - Drilling : Fore
- Disc brake specific profile
- Weight reduction : ISM 4D
 - Valve hole diameter : 6.5 mm
 - Tyre : UST Tubeless and tubetype
 - Internal width : 19 mm
 - ETRTO size 26" : 559x19C
 - ETRTO size 650b/27.5" : 584x19C
 - ETRTO size 29" : 622x19C
 - ETRTO recommended tyre sizes : 28mm to 62mm (1.1" to 2.5")

スポーク

- Material : Zicral
- Shape : straight pull, bladed
- Nipples : Fore integrated aluminum
- Count : 20 front and rear
- Lacing : front crossed 2, rear Isopulse

ホイールハブ

- Front body : carbon with aluminum flanges
- Adjustable sealed cartridge bearings
- Freewheel : ITS-4 alloy
- Shimano 11 speeds compatible
Sram XD Compatible (XX1-X01) with optional kit

ホイールの重み

- ホイール重量 (クイックリリースおよびクリンチャー/チューブラーを除く) (g) :
- Weight Front 26": 630
Weight Front 27.5": 665
Weight Front 29": 690