


REFERENCES WHEELS

F35601 XmaxXLPro26ft WTS



RIMS

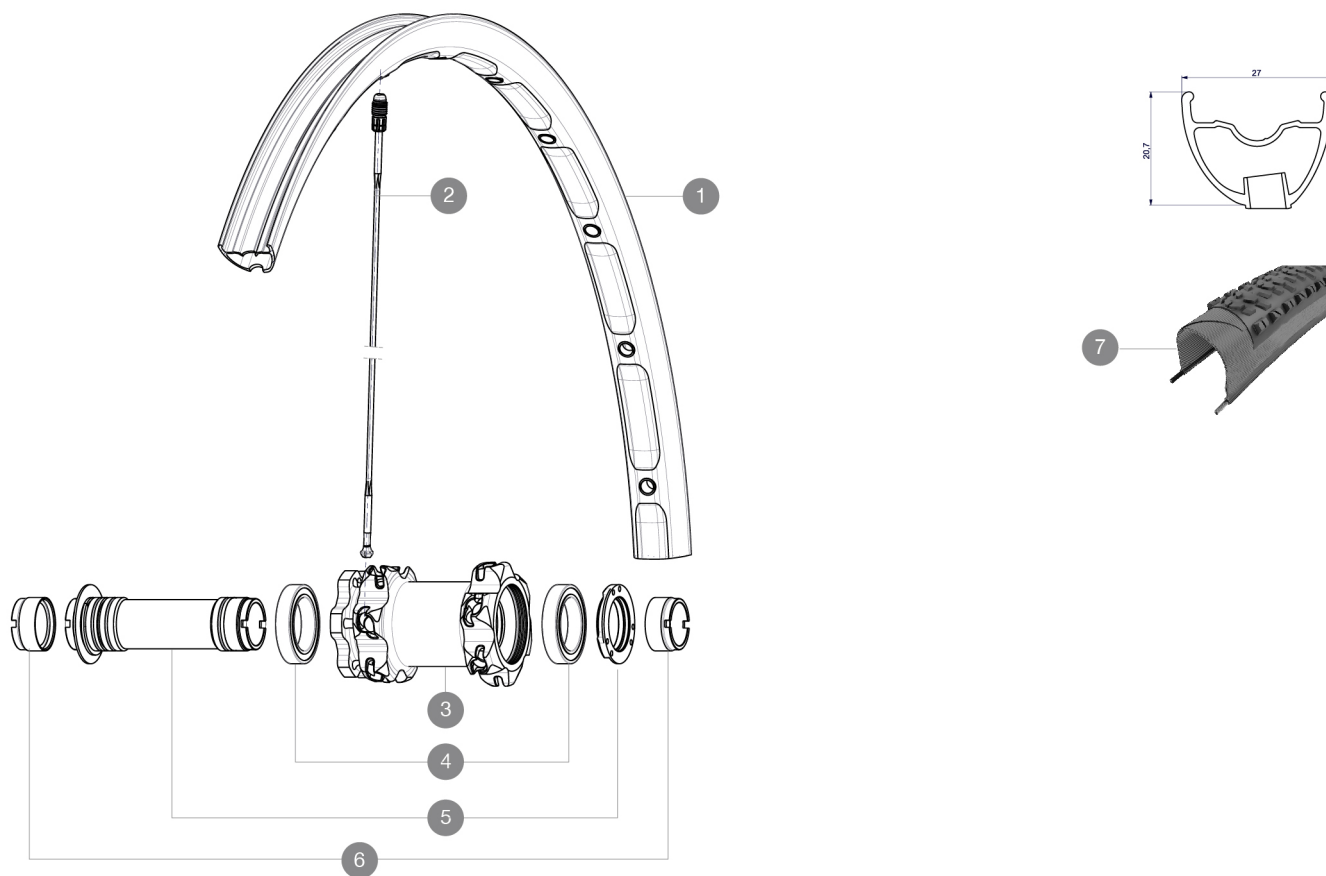

VALVE HOLE (MM): 6,5 :

| | | |
|---|----------|------------------------------------|
| 1 | V2310710 | KIT FRONT RIM CROSSMAX XL 2015 26" |
|---|----------|------------------------------------|

SPOKES

| | | |
|---|----------|---|
| 2 | 36646801 | KIT 12 FT CROSSMAX ENDURO ALU SPK 261,5mm |
|---|----------|---|

HUB SHELLS

| | | |
|---|----------|---|
| 3 | N/A | HUB BODY |
| 4 | M40179 | FRONT HUB BEARING KIT 20mm AXLE |
| 5 | 30870501 | FRONT AXLE 20mm CROSSMAX + DEEMAX ULTI 2012 |

ADAPTERS

| | | |
|---|----------|---------------------|
| 6 | 12982901 | ADAPTER Ft 20x110mm |
|---|----------|---------------------|

MAVIC *Crossmax XL Pro WTS 26***DELIVERED WITH**

| | |
|---------------------------------|--|
| BX601 rear quick release | |
| 1 bottle of Mavic Sealant | |
| UST valve and accessories | |
| Front 15 mm adapters | |
| Rear QR adapters | |
| Rear 12x142mm adapters | |
| Multifonction adjustment wrench | |
| User guide | |

Specifications**RIMS**

- **Material** : Mactal
- **Drilling** : Fore
- **Weight reduction** : ISM
- **Tyre** : UST Tubeless and tubetype
- **Internal width** : 23 mm
- **ETRTO size 26"** : 559x23C
- **ETRTO size 27.5"** : 584x23C
- **ETRTO size 29"** : 622x23C
- **ETRTO recommended tyre sizes** : 37mm to 76mm (1.5" to 3.0")

SPOKES

- **Material** : Zicral
- **Shape** : straight pull, bladed
- **Nipples** : Fore integrated aluminum
- **Count** : 24 front and rear
- **Lacing** : front crossed 2, rear Isopulse

WHEEL HUB

- **Front and rear bodies** : aluminum
 - **Axle material** : aluminum
- Adjustable sealed cartridge bearings
- **Freewheel** : ITS-4 alloy
- Shimano 11 speeds compatible
Sram XD Compatible (XX1-X01) with optionnal kit

WHEEL WEIGHTS

Wheel weight
 Weight Front 26": 790
 Weight Front 27.5": 815
 Weight Front 29": 850