


ASTM CATEGORY 5 : extreme offroad
 ETRTO recommended tyre sizes: 35mm to 69mm (1.4" to 2.7")

参照ホイール

R67501 DmaxUlti16Rr27.5 12x150

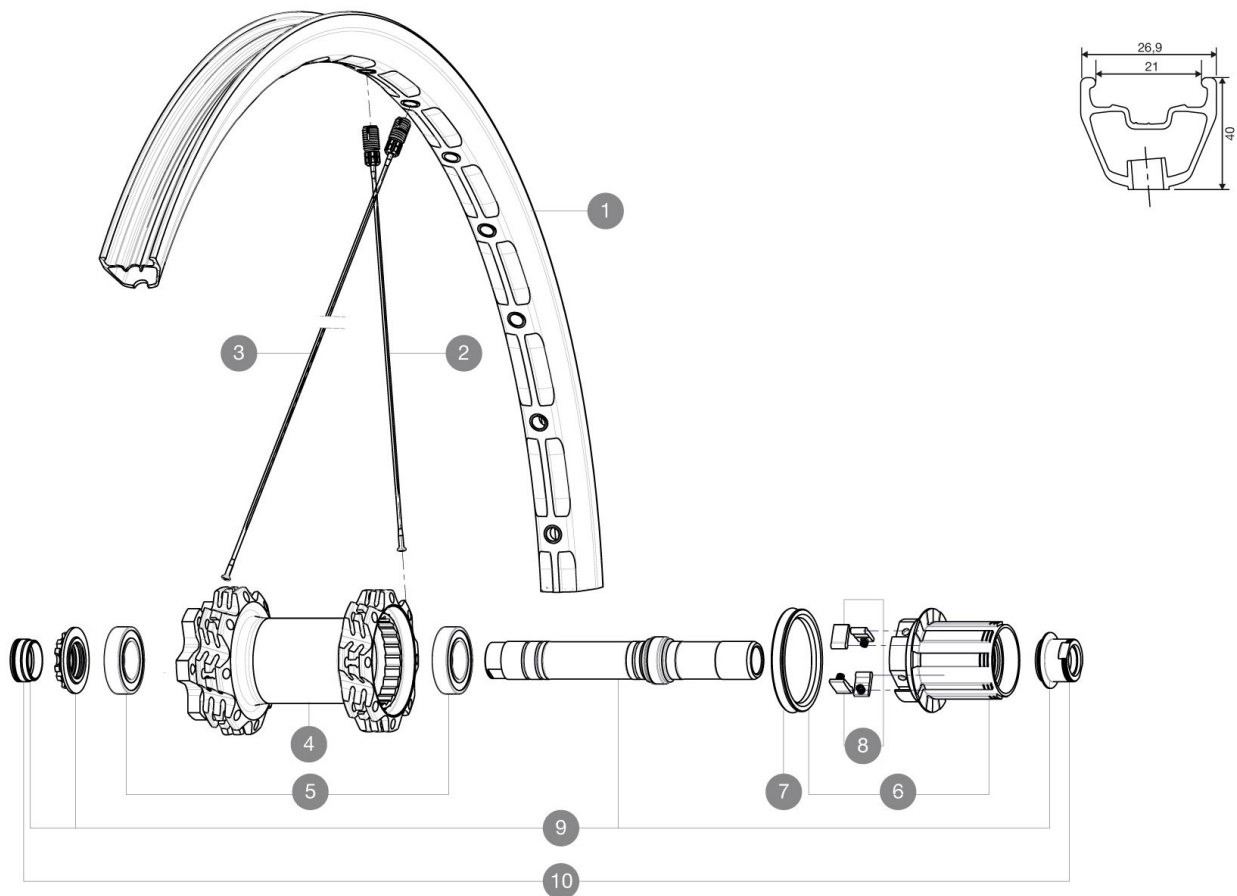

RIMS



バルブ穴径 (MM) : 6.5 :

1	V2312313	REAR RIM DEEMAX ULTIMATE 27,5"
---	----------	--------------------------------

SPOKES

2	V2380601	16 DRIVE SIDE SPOKES DEEMAX 27,5" 278,5MM
3	V2380701	16 OPPOSITE DRIVE SIDE SPOKES DEEMAX 27,5" 280,5MM

HUB SHELLS

4	N/A	HUB BODY
5	M40076	HUB BEARINGS 17x30x7 6903 x 2
6	35126001	ITS-4 FREEWHEEL BODY + SEAL 2013 (WITHOUT PAWLS)
7	99610701	ITS4 SEAL
8	99610601	ITS4 PAWLS KIT
9	30870401	REAR AXLE KIT ITS4 135mm D6T/DCL 2012
9	30870201	REAR AXLE KIT ITS4 150mm 2012

ADAPTERS

10	30872201	FORK REST ITS-4 135mm REAR AXLE > 2012
----	----------	--



Deemax Ultimate 27.5

付属品

UST valve and accessories	
Front 20 mm adapters	
Rear QR adapters	
Multifunction adjustment wrench	
User guide	
Front 20 mm adapters	
12x157mm adaptors (308 593 01 for ITS4)	
UST valve and accessories	
Multifunction adjustment wrench	
User guide	
12x157mm adaptors (308 593 01 for ITS4)	

COMPATIBILITY

Freewheel: Shimano/Sram, convertible to XD with optional driver body	
Front axle: 20mm, convertible to 15mm thru axle with optional adapters	

Specifications

リム

- Material : Maxtal
- Joint : SUP
- Drilling : Fore
- Disc brake specific profile
- Weight reduction : ISM with central spine
- Valve hole diameter : 6.5 mm
- Tyre : UST Tubeless and tubetype
- Material : Maxtal
- Internal width : 21 mm
- ETRTO size 26" : 559x21C
- ETRTO size 27.5" : 584x21C
- ETRTO recommended tyre sizes : 35mm to 69mm (1.4" to 2.7")
- Joint : SUP
- Drilling : Fore
- Disc brake specific profile
- Weight reduction : ISM with central spine
- Valve hole diameter : 6.5 mm
- Tyre : UST Tubeless and tubetype
- Internal width : 21 mm
- ETRTO size 26" : 559x21C

スポーク

- Material : steel
- Shape : straight pull, bladed
- Nipples : Fore integrated aluminum
- Count : front 28, rear 32
- Material : steel
- Lacing : front and rear crossed 3
- Shape : straight pull, bladed
- Nipples : Fore integrated aluminum
- Count : front 28, rear 32
- Lacing : front and rear crossed 3

ホイールハブ

- Front and rear bodies : aluminum
- Axle material : aluminum
- Adjustable sealed cartridge bearings
- Freewheel : ITS-4 alloy
- Front and rear bodies : aluminum
- Shimano 11 speeds compatible
- Axle material : aluminum
- Sram XD Compatible (XX1-X01) with optionnal kit
- Adjustable sealed cartridge bearings
- Freewheel : ITS-4 alloy

VERSIONS

- Color : Black only
- Disc standard : 6 Bolts only

ホイールの重み

ホイール重量 (クイックリリースおよびクリンチャー/チューブラーを除く) (g) :
 Weight Rear 26": 1055
 Weight Rear 27.5": 1085