

MAVIC Ksyrium Pro Disc Allroad

ASTM CATEGORY 2 : road and offroad with jumps less than 15cm

Pour optimiser la longévité des roues, Mavic recommande un poids maximal supporté par les roues de 120kg. Ce poids comprend les roues à galement


Dimensions de pneus recommandés : 28 Å 42 mm

Pression max. : 28 mm 7.7 bars / 110 PSI / 30 mm 5.8 bars / 85 PSI

RÉFÉRENCES ROUES

R73101 KsyProDiscAllroadRr CL

R72301 KsyProDiscAllroadRr INT

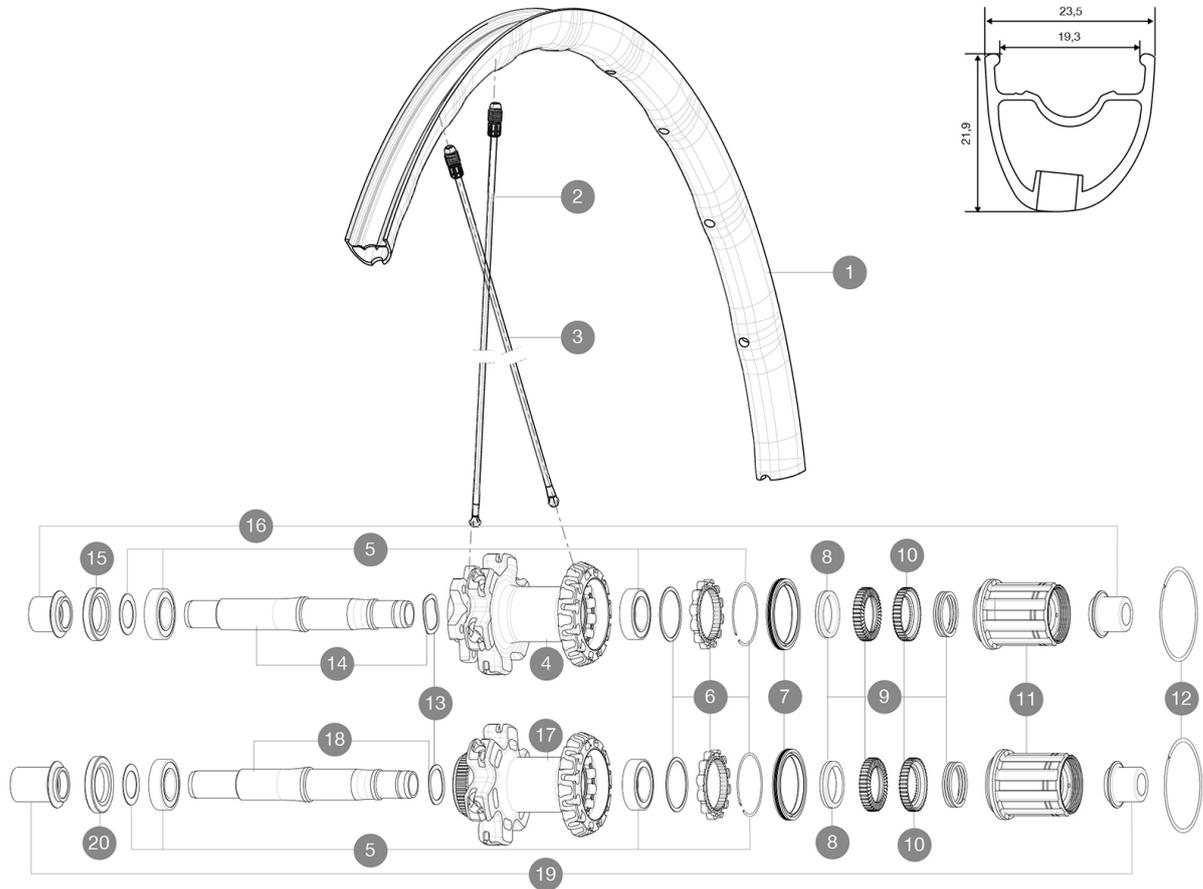

JANTES



Å TROU DE VALVE EN MM : 6,5

1 V2402513 REAR RIM KSYRIUM PRO ALLROAD

ADAPTATEURS

16 B4989601 Rear Axle Adapters 12/142 INT
19 B4989901 Rear Axle Adapters 12/142 CL

RAYONS

2 V2272501 12 FRT + REAR NON-DRIVE SIDE SPOKES 291,5mm KSYRIUM PRO ALLR
3 V2272601 KIT 12 DS KSYRIUM PRO D 17C/ALLROAD PRO SPK 277mm

MOYEURS

4 N/A CORPS DE MOYEU
5 V2560201 KIT ID360 BEARINGS 15/28/7 + 17/28/7
7 V2251601 ID360 SEAL + GREASE
8 V2500501 Kit 3 ID360 pad for noise reduction
9 V2251701 ID360 2 RATCHETS + SPRING + GREASE
10 V2251801 KIT 3 ID360 ROAD SPRINGS
11 V3430101 HG11 Freewheel Body ID360
12 V2252201 KIT 2 REAR HUB RETENTION RINGS 48mm
13 V2251501 3 ID360 WAVE WASHERS
14 V2251301 ID360 AXLE DISC 6T
15 V2251001 KIT ID360 HUB THREADED CAP UB+DISC 6 BOLTS (large) - while s
17 N/A CORPS DE MOYEU
18 V2251401 ID360 AXLE DISC CL
20 V2251101 KIT ID360 HUB THREADED CAP DISC CENTER LOCK

