

ASTM CATEGORY 3 : offroad with jumps less than 61cm

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included

Maximum tyre pressure: 6.1bar/88PSI with a 25mm tyre - 3.5bar/51PSI with a 64mm tyre


Recommended weight limit : 120kg

Recommended tire sizes: 28 to 64 mm (1.1" to 2.5")

ETRTO recommended tyre sizes: 35mm to 69mm (1.4" to 2.7")

## REFERENCES WHEELS

R76201 XRIIDE FTS-X INT 26 QR HG

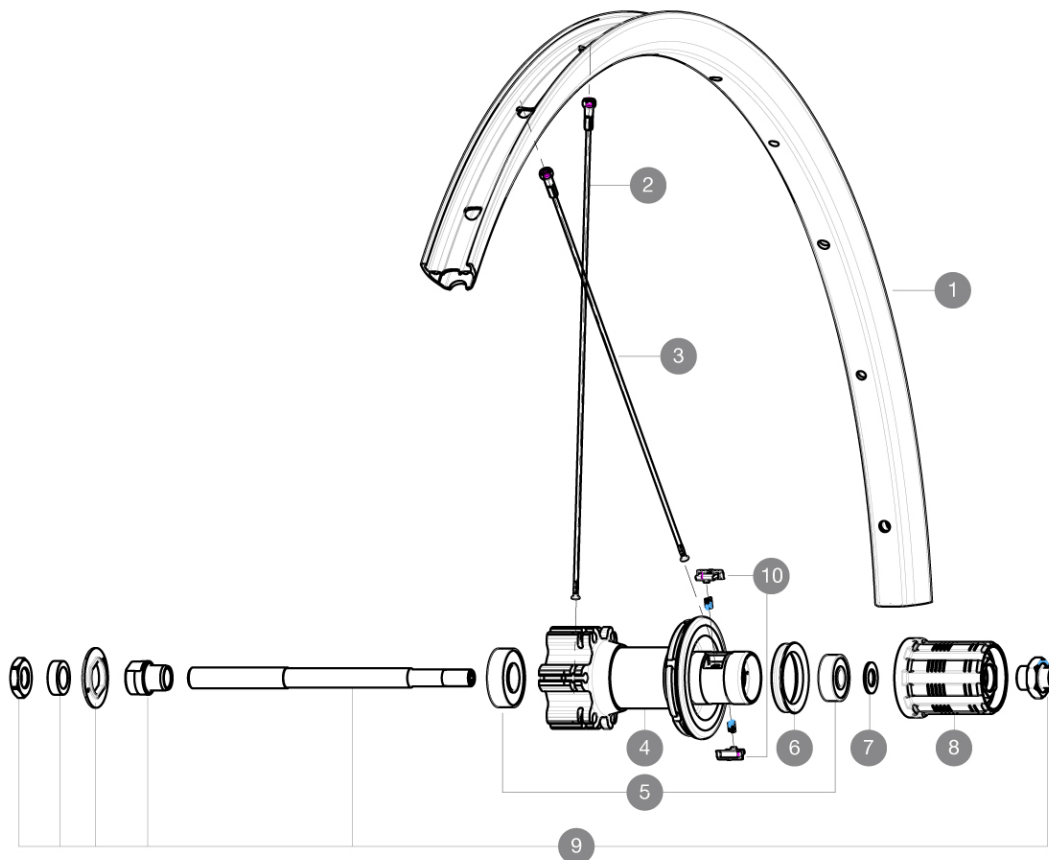

## RIMS



VALVE HOLE (MM): 8,5 WITH POP OFF REDUCER :

1 V2314715 "KIT FRT/RR RIM CROSSRIDE/CROSSRIDE FTSX 26""

## SPOKES

2 36689801 KIT 12 FT/NDS CROSSONE SPK 264mm  
3 V2383901 KIT 12 DS CROSSRIDE FTSX 26" SPOKE 265mm

## HUB SHELLS

4 N/A HUB BODY  
5 M40660 REAR HUB 608+6001 BEARINGS  
6 99500001 FTSL/FTSX FREEHUB BODY SEAL  
7 M40067 INTERNAL FREEWHEEL SPACER FTSL/FTSX  
8 30871101 FTS-L ROAD FREEWHEEL BODY HG11 8/9 compatible  
9 32348001 MTB DISC REAR AXLE QRM MTB DISC  
10 32430301 FTSX PAWLS KIT (MTB WHEELS)



# CROSSRIDE FTS-X 26

DELIVERED WITH

|                      |  |
|----------------------|--|
| BR101 quick releases |  |
| Rim tape             |  |
| Front QR adapters    |  |
| BR101 quick releases |  |
| BR101 quick releases |  |
| BR101 quick releases |  |
| BR101 quick releases |  |
| BR101 quick releases |  |
| BR101 quick releases |  |
| BR101 quick releases |  |
| BR101 quick releases |  |
| Valve reducer        |  |
| Front QR adapters    |  |
| Front QR adapters    |  |
| Front QR adapters    |  |
| Front QR adapters    |  |
| User guide           |  |
| Front QR adapters    |  |
| Front QR adapters    |  |

COMPATIBILITY

|                                                                                                        |  |
|--------------------------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram                                                                                |  |
| Freewheel: Shimano/Sram                                                                                |  |
| Freewheel: Shimano/Sram                                                                                |  |
| Freewheel: Shimano/Sram                                                                                |  |
| Front axle: convertible from 15mm thru axle to Quick Release with included adapters                    |  |
| Front axle: convertible from 15mm thru axle to Quick Release with included adapters                    |  |
| Front axle: convertible from 15mm thru axle to Quick Release with included adapters                    |  |
| Front axle: convertible from 15mm thru axle to Quick Release with included adapters                    |  |
| Front axle: convertible from 15mm thru axle to Quick Release with included adapters                    |  |
| Front axle: convertible from 15mm thru axle to Quick Release with included adapters                    |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel) |  |
| ID360 Shimano steel freewheel body (I/V3790101)                                                        |  |
| Rear axle: 12x148 Boost thru axle                                                                      |  |
| ID360 N3W freewheel body (I/V4270101)                                                                  |  |