

ASTM CATEGORY 3 : offroad with jumps less than 61cm

Recommended weight limit: 120kg

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't

exceed 150kg, bike included


Maximum tyre pressure: 6.1bar/88PSI with a 25mm tyre - 3.5bar/51PSI with a 64mm tyre

Recommended tire sizes: 28 to 64 mm (1.1" to 2.5")

ETRTO recommended tyre sizes: 35mm to 69mm (1.4" to 2.7")

REFERENCES WHEELS

F50701 XRIDE FTS-X INT 29

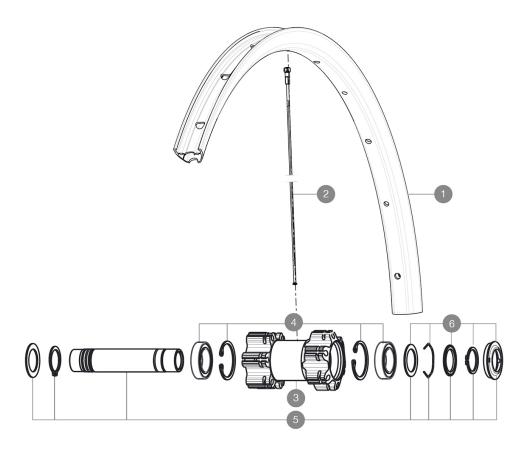



RIMS



VALVE HOLE (MM): 8,5 WITH POP OFF REDUCER:

1 V2314915 "KIT FRT/RR RIM CROSSRIDE/CROSSRIDE FTSX 29"""

SPOKES

2 V2383001 KIT 12 FT/NDS CROSSRIDE FTSX 29" SPK 297mm

HUB SHELLS

3	N/A	HUB BODY
4	99688501	BEARING KIT 9/12/15 D6T HUB 20x32x7 6804
5	V2370101	KIT FRONT AXLE 15MM CROSSONE/-RIDE/-ROC - while stock last
5	V2371101	KIT FRONT QRM AXLE 100mm/B00ST 110mm
6	V2370301	KIT FRONT AUTO ADJUSTING PLAY 15mm AXLE



MAVIC CROSSRIDE FTS-X 29

DELIVERED WITH

BR101 quick releases Rim tape Front QR adapters BR101 quick releases Valve reducer Front QR adapters User guide Download date: 2024-05-15 / Update date: 2024-04-10

COMPATIBILITY	
Freewheel: Shimano/Sram	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
ID360 N3W freewheel body ([V4270101])	
Rear axle: 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel)	
ID360 Shimano steel freewheel body ([V3790101])	
Rear axle: 12x148 Boost thru axle	