

ASTM CATEGORY 1 : road only

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included


Recommended tyre sizes: 25 to 52 mm

Max. Pressure: 25mm 7.7 bars - 110 PSI

参照ホイール

R76801 KsyProCarbSLCDisc Rr CL

R76701 KsyProCarbSLCDisc Rr INT

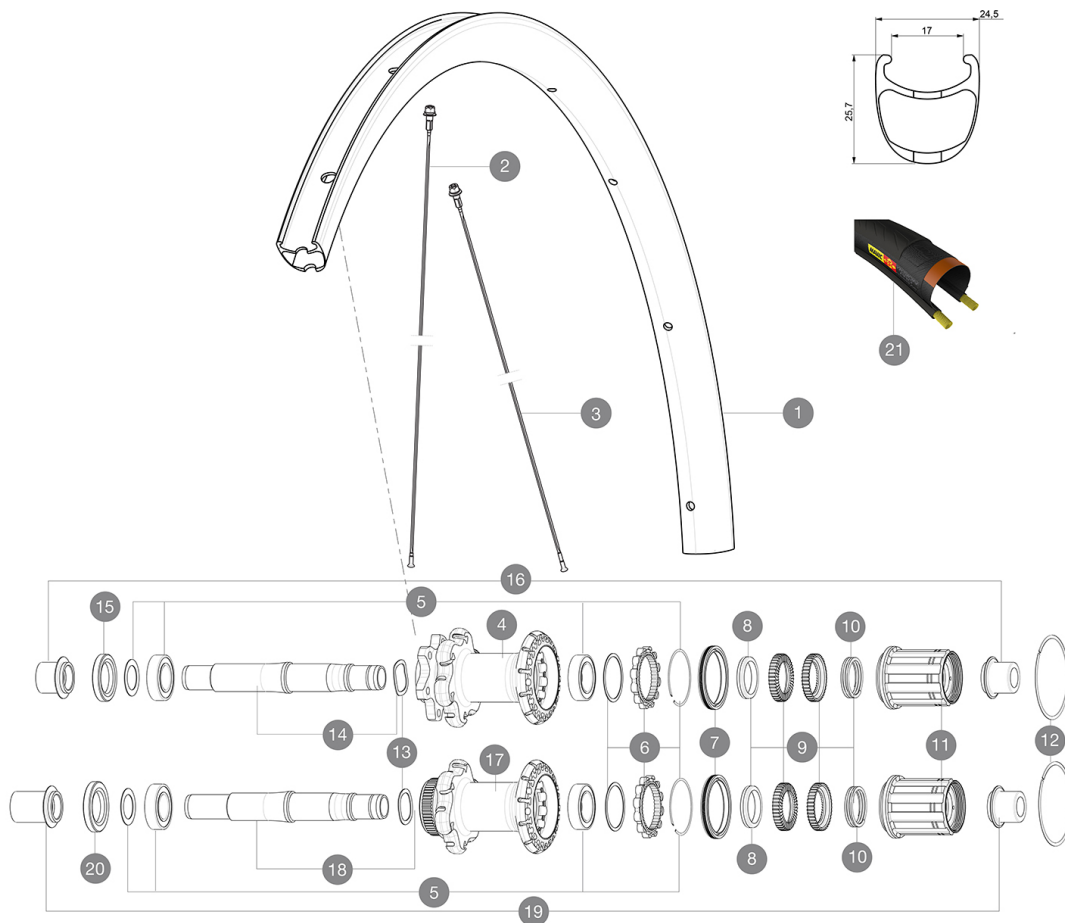

RIMS



バルブ穴径 (MM) : 6,5 :

1	V2733713	KIT REAR RIM KSYRIUM PRO CARBON SL UST DISC
1	V2401713	KIT RR RIM KSYRIUM PRO CARBON SL DISC Clinch - while stock I
	V2690101	KIT CARBON RIM TAPE 21x622mm (SPECIAL RIM TAPE)
	V2620101	UST RIM TAPE 25mm (for 21-24mm wide rim)

SPOKES

2	V2271501	KIT 12 FT KSY PRO CARB SL D/ND S KSY PRO CARB SL SPK 291mm
2	V3663301	KIT 12 FRT KSYR PRO CARB SL UST Disc + NDS KSYR PRO CARB
3	V3663201	12 DS KSY PRO CARB SL UST/UST Disc/C Disc/T Disc BUTTED
3	V2271401	KIT 12 DS KSYRIUM PRO CARB SL T SPOKE 273mm - while stock la

HUB SHELLS

4	N/A	HUB BODY
5	V2560201	KIT ID360 BEARINGS 15/28/7 + 17/28/7
6	V2252701	KIT ID360 INSERT SHAPED EAR LOBE > 2017
7	V2251601	ID360 SEAL + GREASE
8	V2500501	Kit 3 ID360 pad for noise reduction
9	V2251701	ID360 2 RATCHETS + SPRING + GREASE
10	V2251801	KIT 3 ID360 ROAD SPRINGS
11	V3430101	HG11 Freewheel Body ID360
12	V2252201	KIT 2 REAR HUB RETENTION RINGS 48mm
13	V2251501	3 ID360 WAVE WASHERS

14	V2251301	ID360 AXLE DISC 6T
15	V2251001	KIT ID360 HUB THREADED CAP UB+DISC 6 BOLTS (large) - while s
17	N/A	HUB BODY
18	V2251401	ID360 AXLE DISC CL
20	V2251101	KIT ID360 HUB THREADED CAP DISC CENTER LOCK

TYRES

21	37805425	Yksion Pro PowerLink SSC 25
----	----------	-----------------------------

ADAPTERS

16	B4989801	Rear axle adapters 9mm/135 QR (centerlock)
19	B4989401	Rear axle adapters 9mm QR

COMPATIBILITY

Freewheel: Shimano/Sram or Campagnolo, convertible to XD-R with optional driver body	
Front axle: convertible from 12mm thru axle to quick release or 15mm thru axle with optional adapters	
Front axle: convertible from 12mm thru axle to quick release or 15mm thru axle with optional adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adaptaters	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adaptaters	

ホイール重量 (クイックリリースおよびクリンチャー/チューブラーを除く) (g) : 795