



CROSSRIDE UB 26

ASTM CATEGORY 3 : offroad with jumps less than 61cm

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included

the wheels doesn't exceed 120kg, bike included


æ□□ã♠§ã□¿ã□♠ã□♠ç©°æ°□ã□§i¼□52mmã□¿ã□♠ã□♠§2.95bar/43PSI -
125mmã□¿ã□♠ã□♠ã□♠§1.55bar/22PSI

Maximum tyre pressure: 3.2bar/46PSI with a 47mm tyre - 2.85bar/41PSI with a 64mm tyre

ETRTO recommended tyre sizes: 25mm to 52mm (1" to 2.05")

参照ホイール

F56901	CROSSRIDE RB 26 QR
--------	--------------------

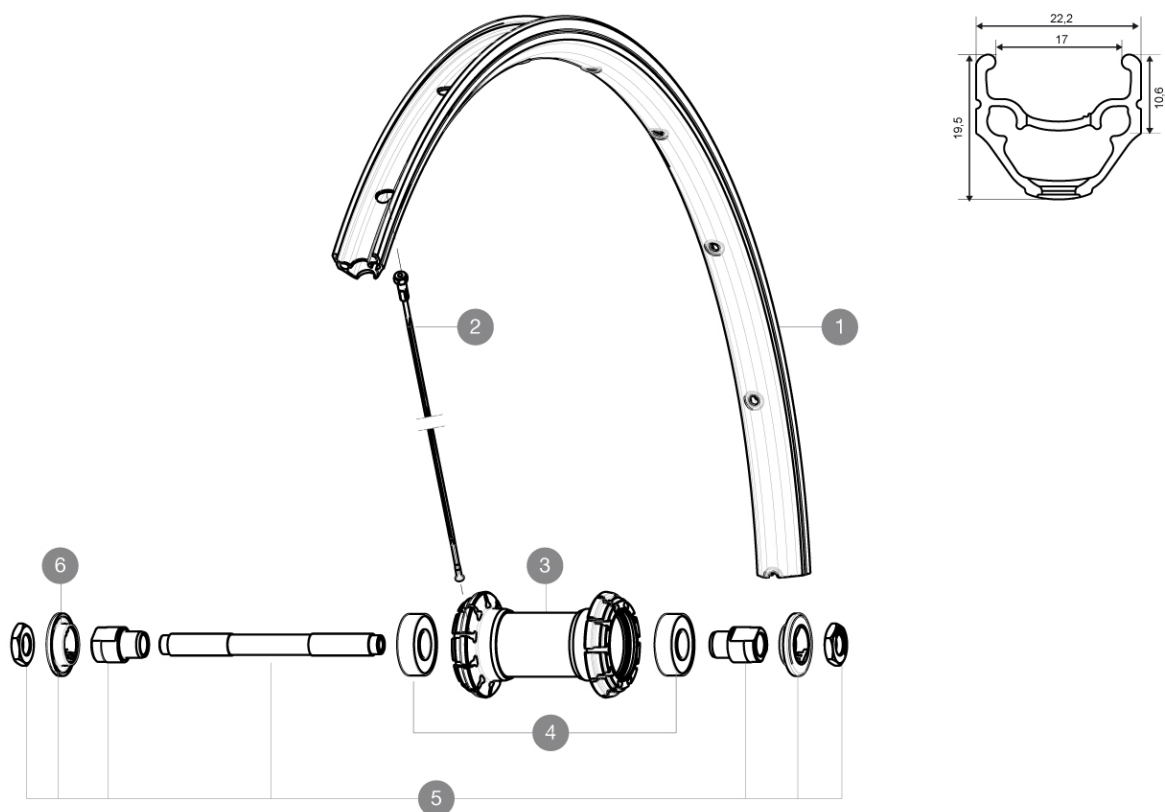

RIMS



&NBSP;:

1	12021815	FRONT/REAR CROSSRIDE UB 11 RIM
---	----------	--------------------------------

SPOKES

2	99606901	10 BLK SPK FR/NDR XRIIDE UB 08
---	----------	--------------------------------

HUB SHELLS

3	N/A	HUB BODY
4	M40318	HUB BEARING KIT 6001
5	32347901	F.AXLE XLD/XMAX EN/COSMOS/KSY.
6	32348401	EXPANSIBLE BEARINGS SUPPORT

COMPATIBILITY

[illegible]