

ASTM CATEGORY 3 : offroad with jumps less than 61cm

Recommended weight limit : 120kg

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included


Maximum tyre pressure: 2.95bar/43PSI with a 52mm tyre - 1.55bar/22PSI with a 125mm tyre

Maximum tyre pressure: 3.2bar/46PSI with a 47mm tyre - 2.85bar/41PSI with a 64mm tyre

ETRTO recommended tyre sizes: 25mm to 52mm (1" to 2.05")

REFERENCES WHEELS

F56901 CROSSRIDE RB 26 QR

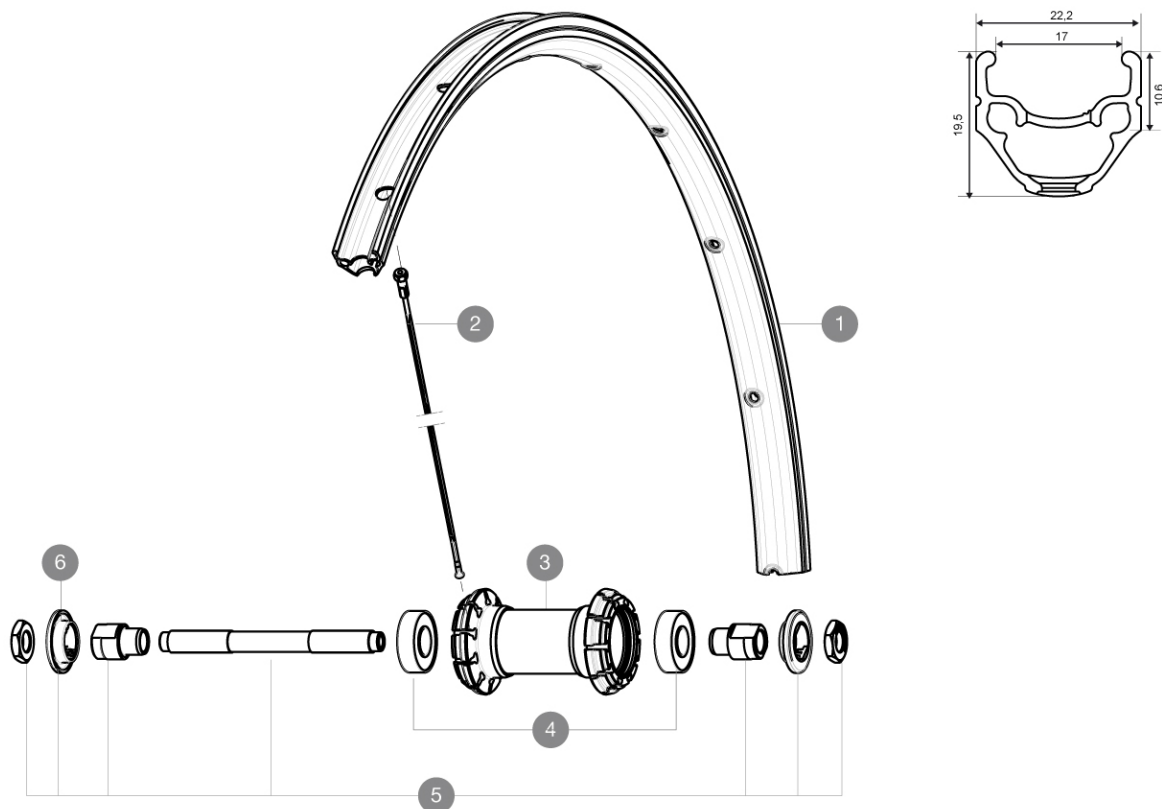

RIMS



VALVE HOLE (MM): 8,5 WITH POP OFF REDUCER :

1 12021815 KIT FRONT/REAR CROSSRIDE UB 2011 RIM

SPOKES

2 99606901 KIT 10 FT/ND5 CROSSRIDE UB 08 BLACK SPOKE

HUB SHELLS

| | | |
|---|----------|-----------------------------|
| 3 | N/A | HUB BODY |
| 4 | M40318 | KIT 2 HUB BEARINGS 6001 |
| 5 | 32347901 | FRONT AXLE QRM UB |
| 6 | 32348401 | EXPANSIBLE BEARINGS SUPPORT |



CROSSRIDE UB 26

DELIVERED WITH

| | |
|------------------------------------|--|
| BR101 quick releases | |
| Rim tape | |
| BR101 quick releases | |
| BR101 quick releases | |
| BR101 quick releases | |
| BR101 quick releases | |
| BR101 quick releases | |
| BR101 quick releases | |
| BR101 quick releases | |
| BR101 quick releases | |
| User guide | |
| Valve reducer | |
| Rear QR adapters (non-boost wheel) | |
| Rim tape | |
| Rim tape | |
| Rim tape | |
| Rim tape | |
| Rim tape | |
| Rim tape | |

COMPATIBILITY

| | |
|--|--|
| Freewheel: Shimano/Sram | |
| Freewheel: Shimano/Sram | |
| Freewheel: Shimano/Sram | |
| Freewheel: Shimano/Sram | |
| Front axle: Quick Release only | |
| Front axle: Quick Release only | |
| Front axle: Quick Release only | |
| Front axle: Quick Release only | |
| Front axle: Quick Release only | |
| Front axle: Quick Release only | |
| Front axle: Quick Release only | |
| Rear axle: Quick Release only | |
| Rear axle: Quick Release only | |
| Rear axle: Quick Release only | |
| Rear axle: Quick Release only | |
| Rear axle: 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel) | |