

ASTM CATEGORY 3 : offroad with jumps less than 61cm

Recommended weight limit : 120kg

Maximum tyre pressure: 3.2bar/46PSI with a 47mm tyre - 2.85bar/41PSI with a 64mm tyre


For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included

Maximum tyre pressure: 2.95bar/43PSI with a 52mm tyre - 1.55bar/22PSI with a 125mm tyre

ETRTO recommended tyre sizes: 25mm to 52mm (1" to 2.05")

## REFERENCES WHEELS

F56901 CROSSRIDE RB 26 QR

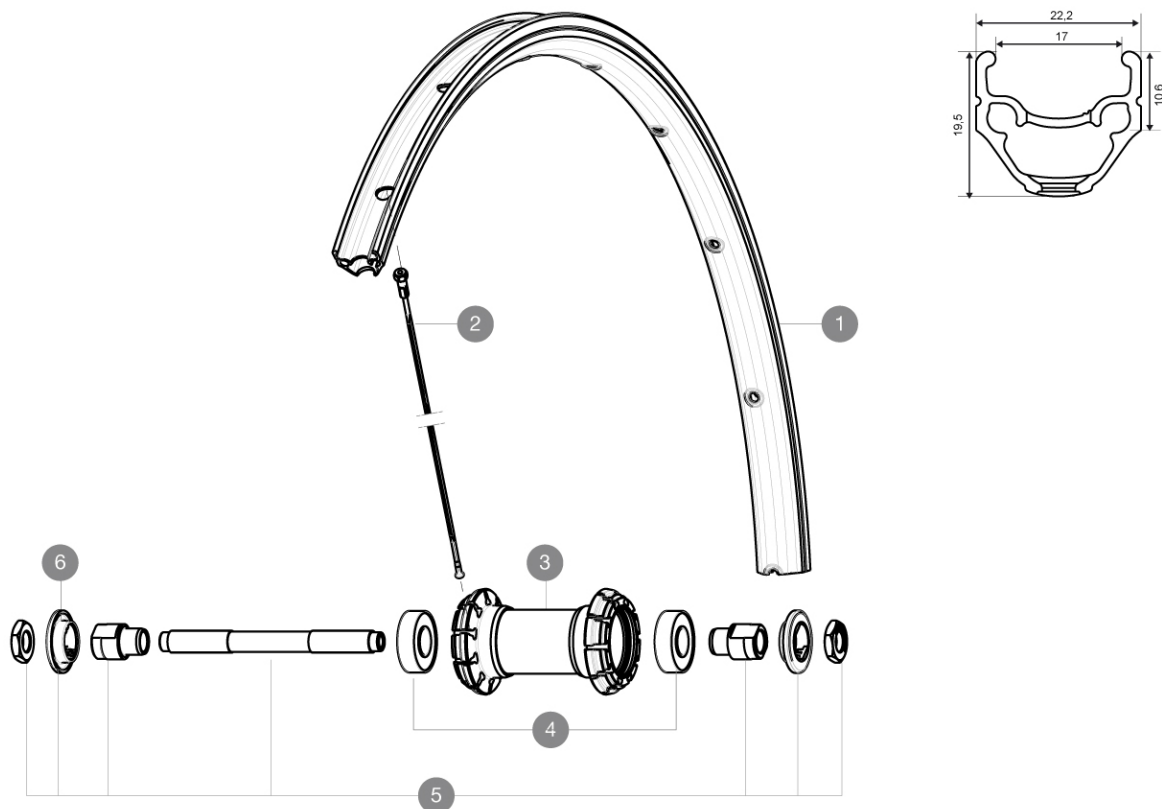

## RIMS



VALVE HOLE (MM): 8,5 WITH POP OFF REDUCER :

1 12021815 KIT FRONT/REAR CROSSRIDE UB 2011 RIM

## SPOKES

2 99606901 KIT 10 FT/NDS CROSSRIDE UB 08 BLACK SPOKE

## HUB SHELLS

3 N/A HUB BODY  
4 M40318 KIT 2 HUB BEARINGS 6001  
5 32347901 FRONT AXLE QRM UB  
6 32348401 EXPANSIBLE BEARINGS SUPPORT



## COMPATIBILITY

Freewheel: Shimano/Sram	
Freewheel: Shimano/Sram	
Freewheel: Shimano/Sram	
Freewheel: Shimano/Sram	
Front axle: Quick Release only	
Front axle: Quick Release only	
Front axle: Quick Release only	
Front axle: Quick Release only	
Front axle: Quick Release only	
Front axle: Quick Release only	
Front axle: Quick Release only	
Rear axle: Quick Release only	
Rear axle: Quick Release only	
Rear axle: Quick Release only	
Rear axle: Quick Release only	
Rear axle: Quick Release only	
Rear axle: 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel)	