

MAVIC **CROSSRIDE UB 26**

ASTM CATEGORY 3 : offroad with jumps less than 61cm

Per garantire la massima affidabilità delle vostre ruote, Mavic raccomanda di non superare il peso massimo di 120kg supportato dalle ruote, bici inclu

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included

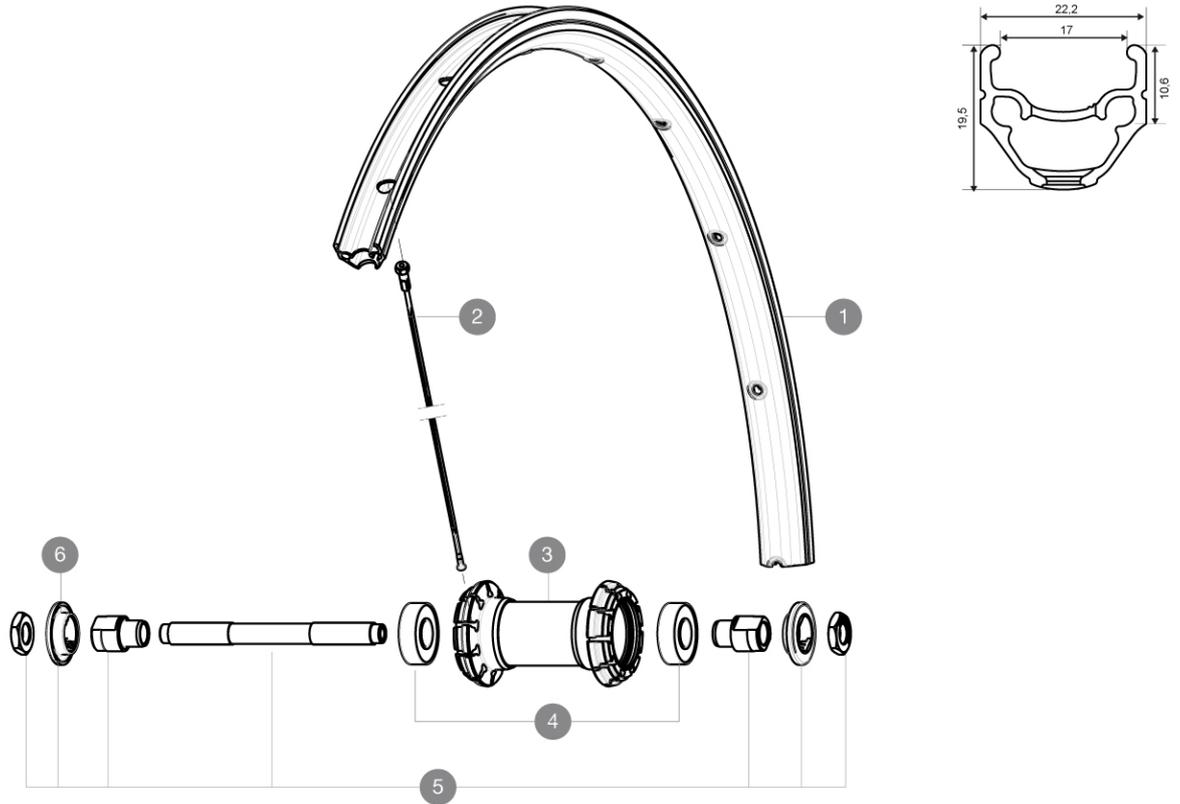
Maximum tyre pressure: 2.95bar/43PSI with a 52mm tyre - 1.55bar/22PSI with a 125mm tyre

Maximum tyre pressure: 3.2bar/46PSI with a 47mm tyre - 2.85bar/41PSI with a 64mm tyre

Dimensione pneumatico consigliata ETRTO: da 25 mm a 52 mm (da 1" a 2.05")

REFERENZE RUOTE

F56901 CROSSRIDE RB 26 QR

**RIMS**

DIAM. FORO VALVOLA (MM): 8,5 CON RIDUTTORE POP-OFF :

1	12021815	FRONT/REAR CROSSRIDE UB 11 RIM
---	----------	--------------------------------

SPOKES

2	99606901	10 RAGGI BLACK ANT/LATO OPP. R.LIBERA XRIDE UB 08
---	----------	---

HUB SHELLS

3	N/A	CORPO MOZZO
4	M40318	KIT CUSCINETTI MOZZO 6001
5	32347901	KIT ASSE ANT. XLD/XMAX EN/COSMOS/KSY.
6	32348401	SUPPORTO ESPANDIBILE x CUSCINETTI MOZZO

