

ASTM CATEGORY 3 : offroad with jumps less than 61cm

Recommended weight limit : 120kg

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included


Maximum tyre pressure: 2.95bar/43PSI with a 52mm tyre - 1.55bar/22PSI with a 125mm tyre

Maximum tyre pressure: 3.2bar/46PSI with a 47mm tyre - 2.85bar/41PSI with a 64mm tyre

ETRTO recommended tyre sizes: 25mm to 52mm (1" to 2.05")

## REFERENCES WHEELS

R83701 CROSSRIDE RB 26 QR M10

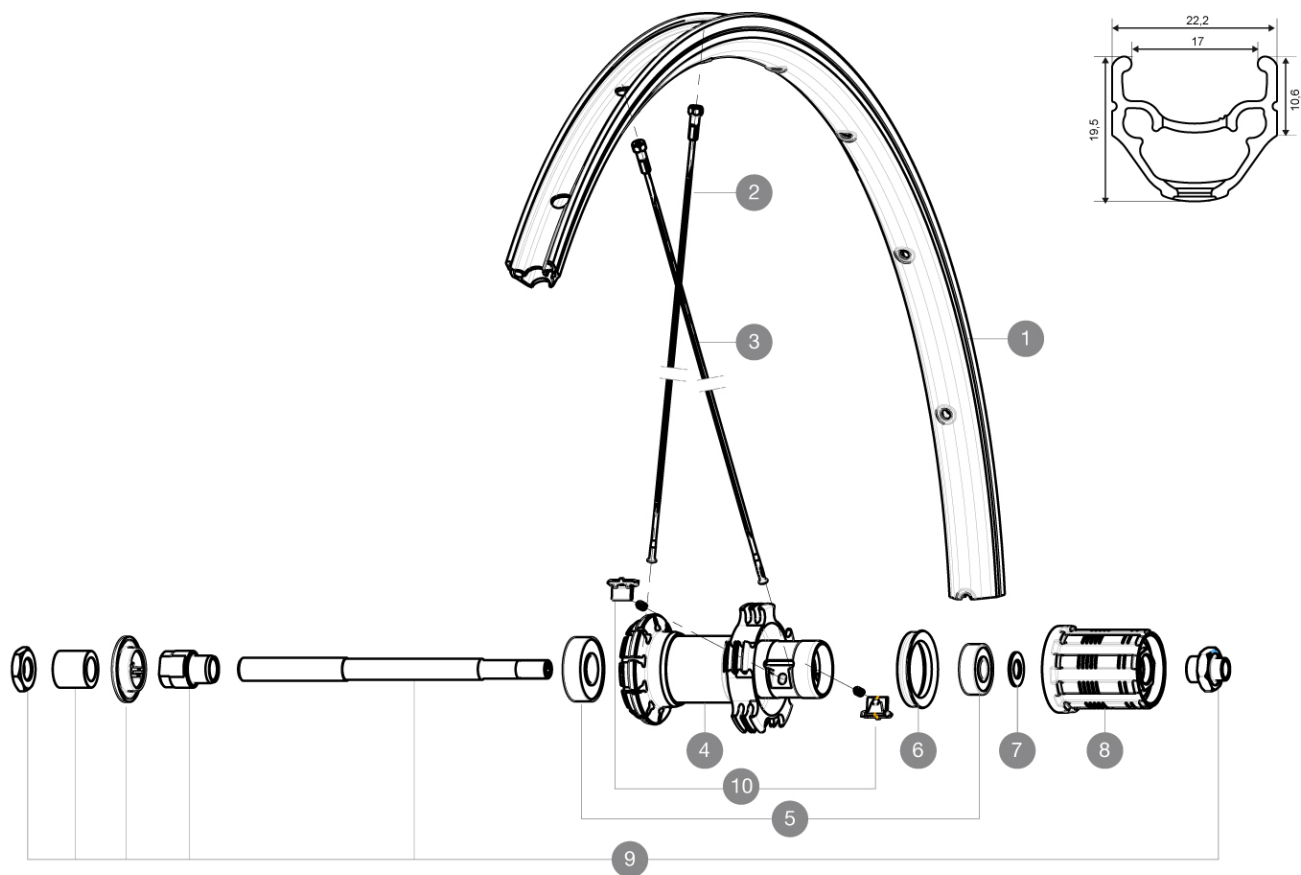

## RIMS



VALVE HOLE (MM): 8,5 WITH POP OFF REDUCER :

1 12021815 KIT FRONT/REAR CROSSRIDE UB 2011 RIM

## SPOKES

2 99606901 KIT 10 FT/NDS CROSSRIDE UB 08 BLACK SPOKE  
3 99607001 KIT 10 DS CROSSRIDE UB 08 BLACK SPOKE 276mm

## HUB SHELLS

4 N/A HUB BODY  
5 M40660 REAR HUB 608+6001 BEARINGS  
6 99500001 FTSL/FTSX FREEHUB BODY SEAL  
7 M40067 INTERNAL FREEWHEEL SPACER FTSL/FTSX  
8 30871101 FTS-L ROAD FREEWHEEL BODY HG11 8/9 compatible  
9 32348301 REAR AXLE QRM MTB UB  
10 32430301 FTSX PAWLS KIT (MTB WHEELS)



# CROSSRIDE UB 26

DELIVERED WITH

|                                    |  |
|------------------------------------|--|
| BR101 quick releases               |  |
| Rim tape                           |  |
| BR101 quick releases               |  |
| BR101 quick releases               |  |
| BR101 quick releases               |  |
| BR101 quick releases               |  |
| BR101 quick releases               |  |
| BR101 quick releases               |  |
| BR101 quick releases               |  |
| BR101 quick releases               |  |
| User guide                         |  |
| Valve reducer                      |  |
| Rim tape                           |  |
| Rim tape                           |  |
| Rim tape                           |  |
| Rim tape                           |  |
| Rim tape                           |  |
| Rear QR adapters (non-boost wheel) |  |
| Rim tape                           |  |

COMPATIBILITY

|                                                                                                        |  |
|--------------------------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram                                                                                |  |
| Freewheel: Shimano/Sram                                                                                |  |
| Freewheel: Shimano/Sram                                                                                |  |
| Freewheel: Shimano/Sram                                                                                |  |
| Front axle: Quick Release only                                                                         |  |
| Front axle: Quick Release only                                                                         |  |
| Front axle: Quick Release only                                                                         |  |
| Front axle: Quick Release only                                                                         |  |
| Front axle: Quick Release only                                                                         |  |
| Front axle: Quick Release only                                                                         |  |
| Front axle: Quick Release only                                                                         |  |
| Rear axle: Quick Release only                                                                          |  |
| Rear axle: Quick Release only                                                                          |  |
| Rear axle: Quick Release only                                                                          |  |
| Rear axle: Quick Release only                                                                          |  |
| Rear axle: Quick Release only                                                                          |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel) |  |