

MAVIC **CROSSRIDE UB 26**

ASTM CATEGORY 3 : offroad with jumps less than 61cm

Per garantire la massima affidabilità delle vostre ruote, Mavic raccomanda di non superare il peso massimo di 120kg supportato dalle ruote, bici inclu

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included

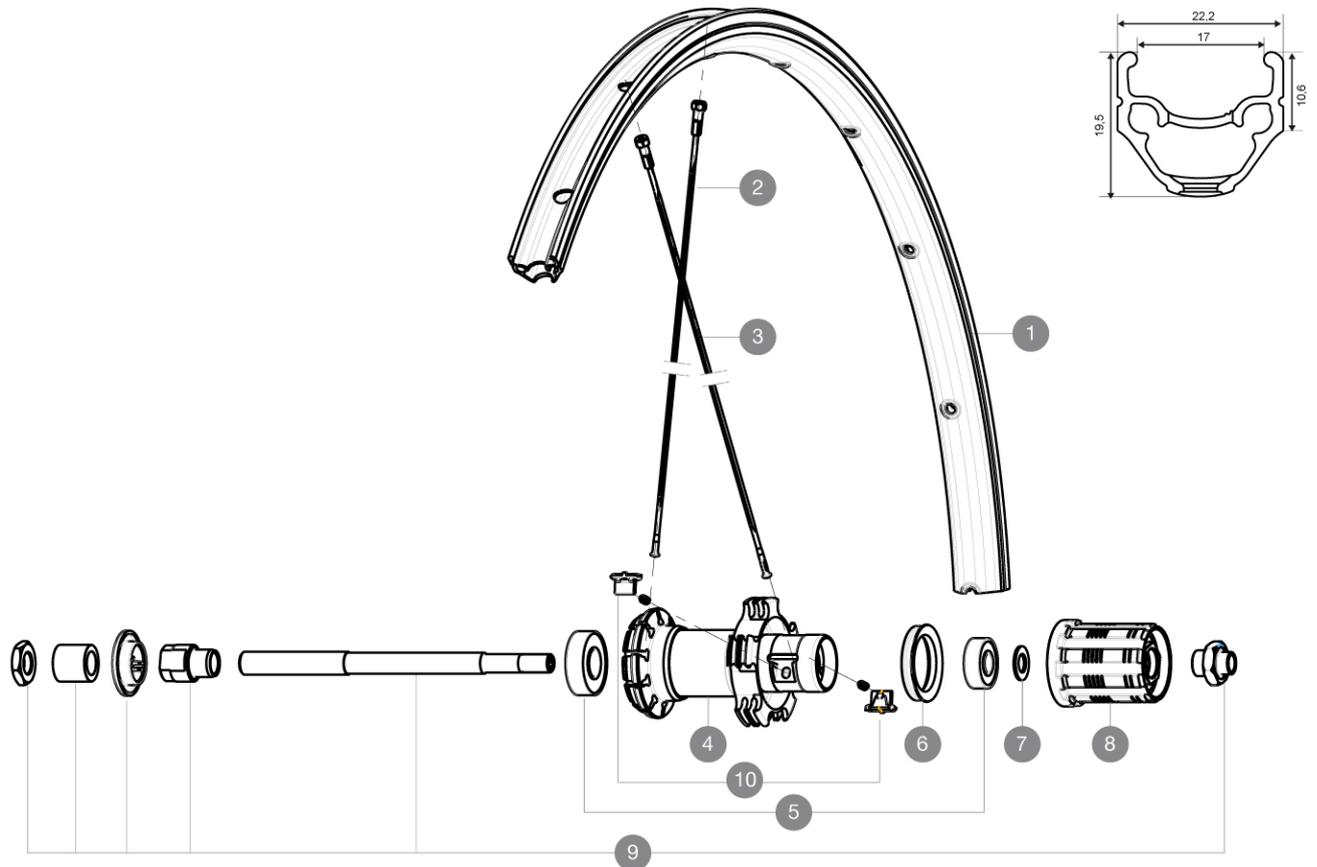
Maximum tyre pressure: 2.95bar/43PSI with a 52mm tyre - 1.55bar/22PSI with a 125mm tyre

Maximum tyre pressure: 3.2bar/46PSI with a 47mm tyre - 2.85bar/41PSI with a 64mm tyre

Dimensione pneumatico consigliata ETRTO: da 25 mm a 52 mm (da 1" a 2.05")

REFERENZE RUOTE

R83701 CROSSRIDE RB 26 QR M10

**RIMS**

DIAM. FORO VALVOLA (MM): 8,5 CON RIDUTTORE POP-OFF CON
RIDUTTORE POP-OFF :

1	12021815	FRONT/REAR CROSSRIDE UB 11 RIM
---	----------	--------------------------------

SPOKES

2	99606901	10 RAGGI BLACK ANT/LATO OPP. R. LIBERA XRIDE UB 08
3	99607001	10 RAGGI BLACK L. RUOTA LIBERA XRIDE UB 08 276

HUB SHELLS

4	N/A	CORPO MOZZO
5	M40660	KIT CUSCINETTI MOZZO POST. 608+6001
6	99500001	GUARNIZIONE CORPO RUOTA LIBERA FTSL/FTSX
7	M40067	10 DISTANZIALI / RONDELLE x CORPO RUOTA LIBERA
8	30871101	FTS-L FREEWHEEL BODY HG11 2013 (8 or 9mm axle compatible)
9	32348301	KIT ASSE POST. UB ATB CROSSMAX ENDU
10	32430301	KIT CRICCHETTI FT SX MTB

