

ASTM CATEGORY 3 : offroad with jumps less than 61cm

Per garantire la massima affidabilità delle vostre ruote, Mavic raccomanda di non superare il peso massimo di 120kg supportato dalle ruote, bici inclu

Maximum tyre pressure: 2.95bar/43PSI with a 52mm tyre - 1.55bar/22PSI with a 125mm tyre


Maximum tyre pressure: 3.2bar/46PSI with a 47mm tyre - 2.85bar/41PSI with a 64mm tyre

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included

Dimensione pneumatico consigliata ETRTO: da 25 mm a 52 mm (da 1" a 2.05")

REFERENZE RUOTE

R83701 CROSSRIDE RB 26 QR M10

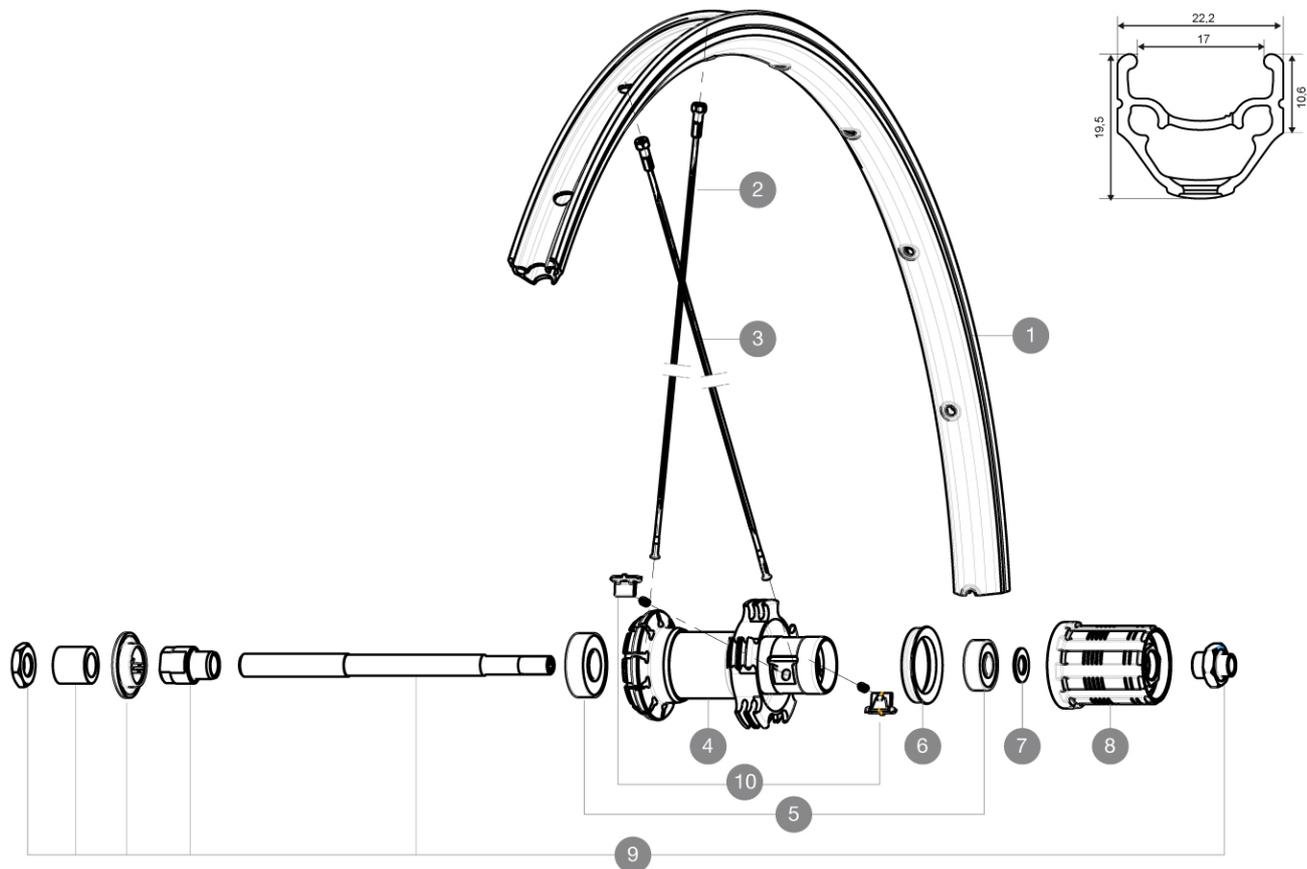

RIMS



DIAM. FORO VALVOLA (MM): 8,5 CON RIDUTTORE POP-OFF CON RIDUTTORE POP-OFF :

1	12021815	FRONT/REAR CROSSRIDE UB 11 RIM
---	----------	--------------------------------

SPOKES

2	99606901	10 RAGGI BLACK ANT/LATO OPP. R.LIBERA XRIDE UB 08
3	99607001	10 RAGGI BLACK L.RUOTA LIBERA XRIDE UB 08 276

HUB SHELLS

4	N/A	CORPO MOZZO
5	M40660	KIT CUSCINETTI MOZZO POST. 608+6001
6	99500001	GUARNIZIONE CORPO RUOTA LIBERA FTSL/FTSX
7	M40067	10 DISTANZIALI / RONDELLE x CORPO RUOTA LIBERA
8	30871101	FTS-L FREEWHEEL BODY HG11 2013 (8 or 9mm axle compatible)
9	32348301	KIT ASSE POST. UB ATB CROSSMAX ENDU
10	32430301	KIT CRICCHETTI FT SX MTB

