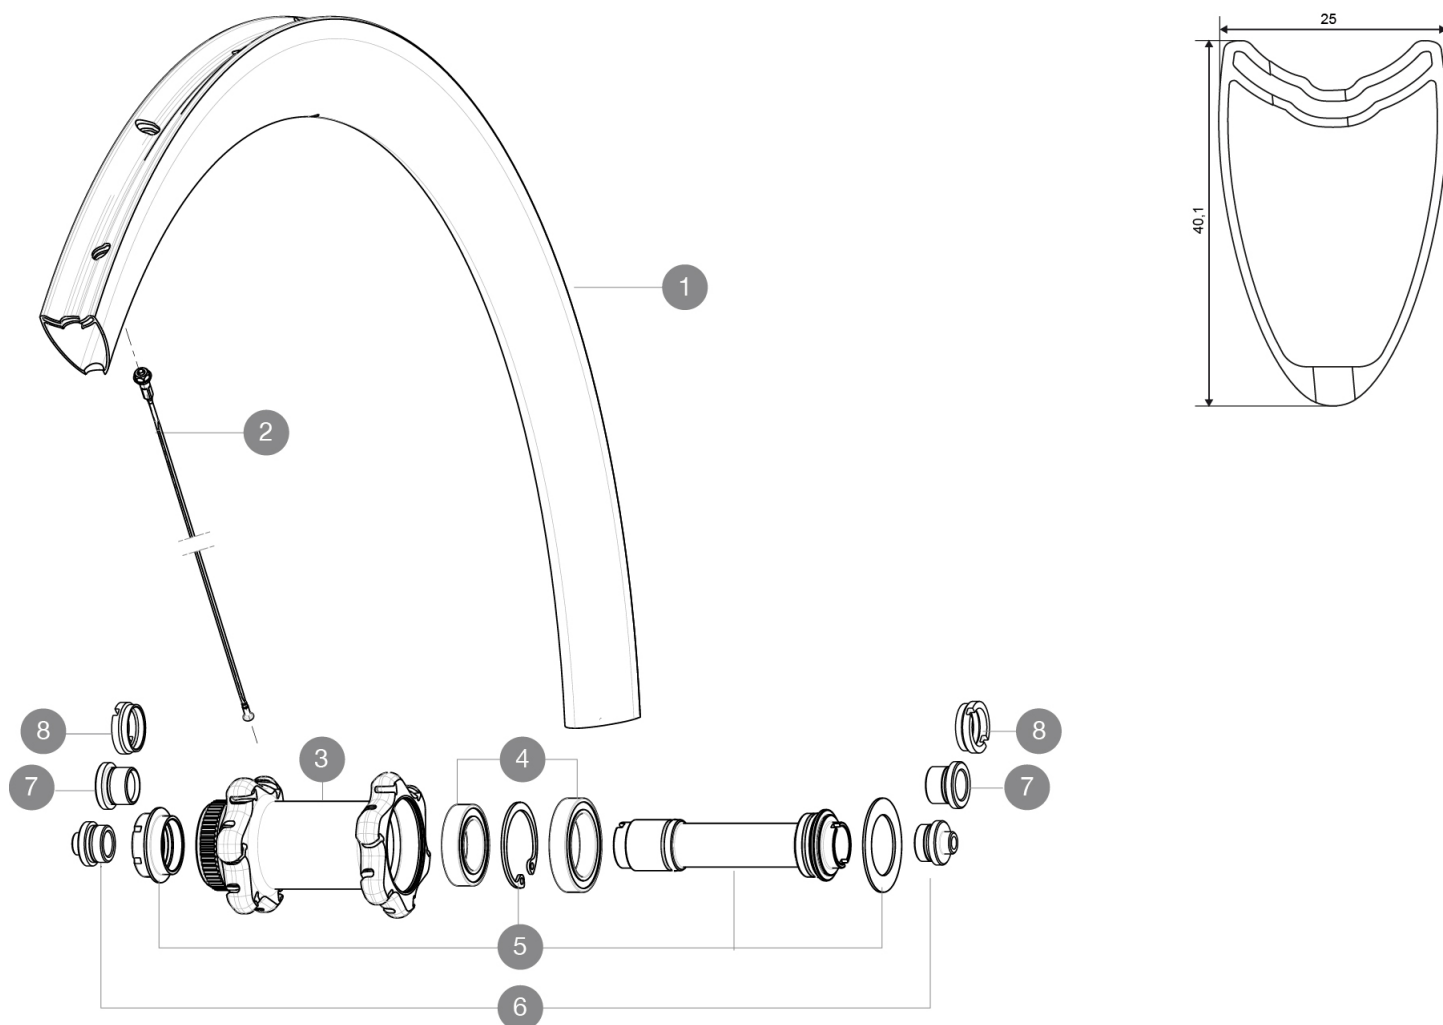


Recommended weight limit : 120kg  
Recommended tyre sizes: 25 to 52 mm  
Max. Pressure: 23mm 8.7 bars - 125 psi, 25/28mm 7.7 bars - 110 psi  
Max. Pressure: 25mm 7.7 bars - 110 PSI

## REFERENCES WHEELS

|        |                         |        |                       |
|--------|-------------------------|--------|-----------------------|
| F71331 | CosProCarSITDCLFIQRx100 | F52401 | CosProCarbSLTDiscCLFt |
| F71351 | CosProCarSITDCLF15x100  |        |                       |



## RIMS



VALVE HOLE  $\varnothing$  (MM): 6,5 :

|   |          |                                            |
|---|----------|--------------------------------------------|
| 1 | V2403910 | KIT FRONT RIM COS PRO CARB SL DISC TUBULAR |
|---|----------|--------------------------------------------|

## SPOKES

|   |          |                                                              |
|---|----------|--------------------------------------------------------------|
| 2 | V2277401 | KIT 12 FT/NDS COSMIC PRO CARB SL D T 278mm SP - while stock  |
| 2 | V3663001 | KIT 12 FRT/NDS COSMIC PRO CARB SL UST/UST Disc C/C Disc/T Di |

## HUB SHELLS

|   |          |                                                      |
|---|----------|------------------------------------------------------|
| 4 | 99688601 | BEARING KIT 9/15 DCL HUB 20x32x7 6804 + 25x37x7 6805 |
| 5 | V2252401 | KIT MY16 FRONT AXLE ROAD DISC 9/12/15 CL             |



## ADAPTERS

|   |          |                        |
|---|----------|------------------------|
| 6 | B4104301 | ADAPTER Ft 9mm QR QRM+ |
| 7 | B4104201 | ADAPTER Ft 12mm QRM+   |
| 8 | B4104401 | ADAPTER Ft 15mm QRM+   |



# Cosmic Pro Carbon SL T Disc

### DELIVERED WITH

|                                                                                                         |                                                                                     |
|---------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| BR601 quick releases                                                                                    |                                                                                     |
| Front 12 mm adapters                                                                                    |                                                                                     |
| Specific disc bolts                                                                                     |                                                                                     |
| User guide                                                                                              |                                                                                     |
| Front 12 mm adapters<br>(B4104201)<br>1                                                                 |    |
| Rear 12x142mm adapters for Instant Drive 360<br>(B49 896 01 for ID360 6T, B49 899 01 for ID360 CL)<br>1 |    |
| Specific disc bolts                                                                                     |                                                                                     |
| Specific disc bolts                                                                                     |                                                                                     |
| Multifunction adjustment wrench<br>(325 423 01)<br>1                                                    |  |
| Multifunction adjustment wrench<br>(325 423 01)<br>1                                                    |  |
| User guide                                                                                              |                                                                                     |
| User guide                                                                                              |                                                                                     |

### COMPATIBILITY

|                                                                                                       |  |
|-------------------------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram or Campagnolo, convertible to XD-R with optional driver body                  |  |
| Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies               |  |
| Front axle: convertible from 12mm thru axle to quick release or 15mm thru axle with optional adapters |  |
| Front axle: convertible from 12mm thru axle to quick release or 15mm thru axle with optional adapters |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters                        |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters                        |  |

### Specifications

#### RIMS

- **Material :** 3K carbon fibers
- **Height :** 40 mm
- **Material :** 3K carbon fibers
- **Material :** 3K carbon fibers
- **Drilling :** traditional
- Disc brake specific profile
- **Valve hole diameter :** 6.5 mm
- **Tyre :** tubular
- **ETRTO size :** 28" tubular
- **Recommended tyre sizes :** 25 to 52 mm
- **Height :** 40 mm
- **Height :** 40 mm
- **Drilling :** traditional
- **Drilling :** traditional
- Disc brake specific profile
- Disc brake specific profile
- **Valve hole diameter :** 6.5 mm
- **Valve hole diameter :** 6.5 mm
- **Tyre :** tubular
- **Tyre :** tubular
- **ETRTO size :** 28" tubular
- **ETRTO size :** 28" tubular

#### SPOKES

- **Material :** steel

#### WHEEL HUB

- **Front and rear bodies :** aluminum
- **Axle material :** aluminum
- Sealed cartridge bearings
- **Freewheel :** Instant Drive 360
- **Front and rear bodies :** aluminum
- **Front and rear bodies :** aluminum
- **Front :** Quick release, 12 thru and 15 thru compatible
- **Axle material :** aluminum
- **Axle material :** aluminum
- **Rear :** 12x142 (convertible to quick release with optional adapters)
- **Front bearings :** adjustable sealed cartridge bearings (QRM+), Rear bearings auto adjust sealed cartridge bearings (QRM Auto)
- Sealed cartridge bearings
- **Freewheel :** Instant Drive 360
- **Freewheel :** Instant Drive 360
- **Front :** Quick release, 12 thru and 15 thru compatible
- **Rear :** 12x142 (convertible to quick release with optional adapters)

#### VERSIONS

- **Color :** Black only

#### WHEEL WEIGHTS

Wheel weight 730