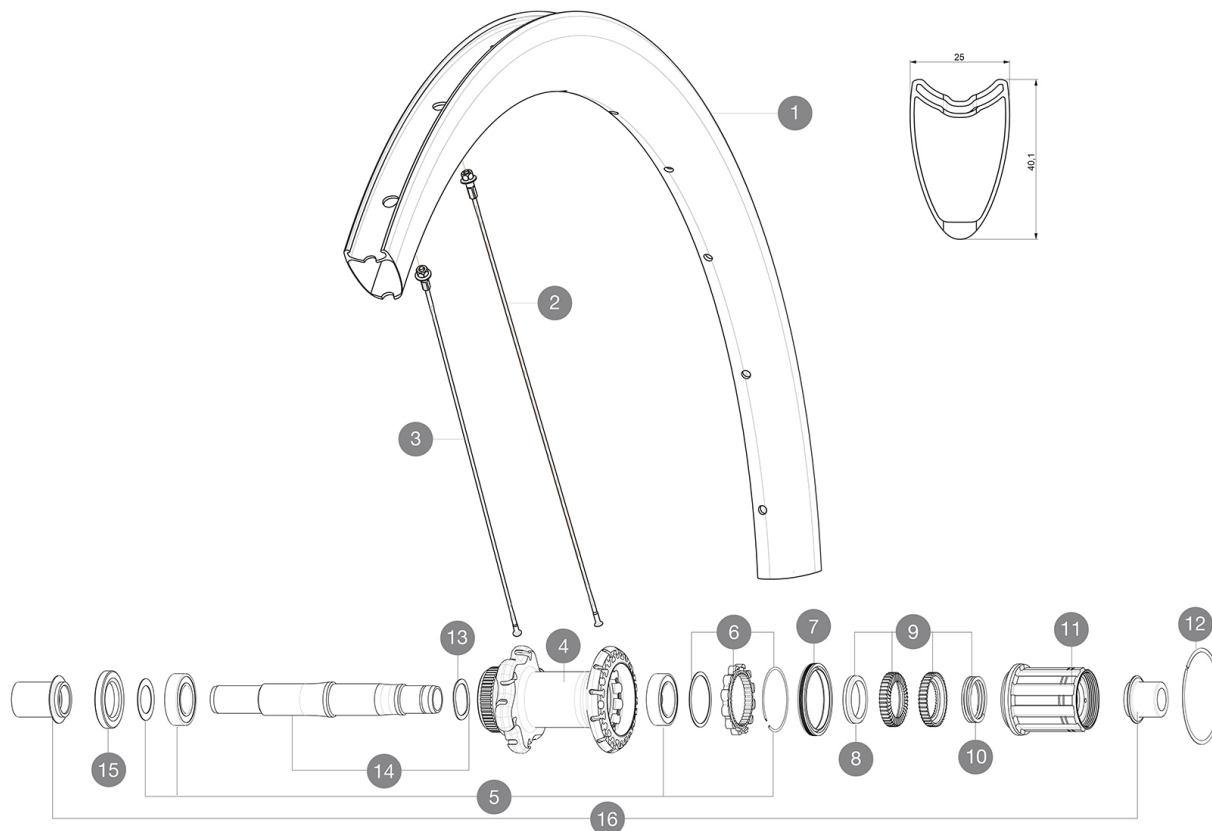


Recommended weight limit : 120kg  
Recommended tyre sizes: 25 to 52 mm  
Max. Pressure: 23mm 8.7 bars - 125 psi, 25/28mm 7.7 bars - 110 psi  
Max. Pressure: 25mm 7.7 bars - 110 PSI

### REFERENCES WHEELS

R98821 CosProCarSiTDCLR12x142

R78101 CosProCarbSLTDiscCLRr



### RIMS



VALVE HOLE  $\bar{A}$  (MM): 6,5 :

|   |          |                                            |
|---|----------|--------------------------------------------|
| 1 | V2404013 | KIT REART RIM COS PRO CARB SL DISC TUBULAR |
|---|----------|--------------------------------------------|

### SPOKES

|   |          |                                                               |
|---|----------|---------------------------------------------------------------|
| 2 | V2277301 | KIT 12 DS COSMIC PRO CARB SL D T SPK 261mm - while stock las  |
| 2 | V3663901 | KIT 12 NON DRIVE SIDE BUTTED AERO STAINLESS SPOKE 261 + alu   |
| 3 | V3663001 | KIT 12 FR/ND/DS COSMIC PRO CARB SL UST/UST Disc C/C Disc/T Di |
| 3 | V2277401 | KIT 12 FT/ND/DS COSMIC PRO CARB SL D T 278mm SP - while stock |

### HUB SHELLS

|    |          |                                             |
|----|----------|---------------------------------------------|
| 4  | N/A      | HUB BODY                                    |
| 5  | V2560201 | KIT ID360 BEARINGS 15/28/7 + 17/28/7        |
| 6  | V2252701 | KIT ID360 INSERT SHAPED EAR LOBE > 2017     |
| 7  | V2251601 | KIT ID360 SEAL + GREASE                     |
| 8  | V2500501 | KIT ID360 3 PADS NOISE REDUCING             |
| 9  | V2251701 | KIT ID360 2 RATCHETS + SPRING + GREASE      |
| 10 | V2251801 | KIT 3 ID360 ROAD SPRINGS                    |
| 11 | V3430101 | HG11 Freewheel Body ID360                   |
| 12 | V2252201 | KIT 2 REAR HUB RETENTION RINGS 48mm         |
| 13 | V2251501 | KIT 3 ID360 WAVE WASHERS                    |
| 14 | V2251401 | KIT ID360 AXLE DISC CENTER LOCK             |
| 15 | V2251101 | KIT ID360 HUB THREADED CAP DISC CENTER LOCK |



### ADAPTERS

|    |          |                                   |
|----|----------|-----------------------------------|
| 16 | B4989901 | ADAPTER Rr 12x142mm ID360 (CLock) |
|----|----------|-----------------------------------|



# Cosmic Pro Carbon SL T Disc

## DELIVERED WITH

|                                                                                                         |                                                                                     |
|---------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| BR601 quick releases                                                                                    |                                                                                     |
| Front 12 mm adapters                                                                                    |                                                                                     |
| Specific disc bolts                                                                                     |                                                                                     |
| User guide                                                                                              |                                                                                     |
| Front 12 mm adapters<br>(B4104201)<br>1                                                                 |    |
| Rear 12x142mm adapters for Instant Drive 360<br>(B49 896 01 for ID360 6T, B49 899 01 for ID360 CL)<br>1 |    |
| Specific disc bolts                                                                                     |                                                                                     |
| Specific disc bolts                                                                                     |                                                                                     |
| Multifunction adjustment wrench<br>(325 423 01)<br>1                                                    |  |
| Multifunction adjustment wrench<br>(325 423 01)<br>1                                                    |  |
| User guide                                                                                              |                                                                                     |
| User guide                                                                                              |                                                                                     |

## COMPATIBILITY

|                                                                                                       |  |
|-------------------------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies               |  |
| Freewheel: Shimano/Sram or Campagnolo, convertible to XD-R with optional driver body                  |  |
| Front axle: convertible from 12mm thru axle to quick release or 15mm thru axle with optional adapters |  |
| Front axle: convertible from 12mm thru axle to quick release or 15mm thru axle with optional adapters |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters                        |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters                        |  |

## Specifications

### RIMS

- **Material** : 3K carbon fibers
- **Height** : 40 mm
- **Material** : 3K carbon fibers
- **Material** : 3K carbon fibers
- **Drilling** : traditional
- Disc brake specific profile
- **Valve hole diameter** : 6.5 mm
- **Tyre** : tubular
- **ETRTO size** : 28" tubular
- **Recommended tyre sizes** : 25 to 52 mm
- **Height** : 40 mm
- **Height** : 40 mm
- **Drilling** : traditional
- **Drilling** : traditional
- Disc brake specific profile
- Disc brake specific profile
- **Valve hole diameter** : 6.5 mm
- **Valve hole diameter** : 6.5 mm
- **Tyre** : tubular
- **Tyre** : tubular
- **ETRTO size** : 28" tubular
- **ETRTO size** : 28" tubular

### SPOKES

- **Material** : steel

### WHEEL HUB

- **Front and rear bodies** : aluminum
- **Axle material** : aluminum
- Sealed cartridge bearings
- **Freewheel** : Instant Drive 360
- **Front and rear bodies** : aluminum
- **Front and rear bodies** : aluminum
- **Front** : Quick release, 12 thru and 15 thru compatible
- **Axle material** : aluminum
- **Axle material** : aluminum
- **Rear** : 12x142 (convertible to quick release with optional adapters)
- Sealed cartridge bearings
- **Front bearings** : adjustable sealed cartridge bearings (QRM+), Rear bearings auto adjust sealed cartridge bearings (QRM Auto)
- **Freewheel** : Instant Drive 360
- **Freewheel** : Instant Drive 360
- **Front** : Quick release, 12 thru and 15 thru compatible
- **Rear** : 12x142 (convertible to quick release with optional adapters)

### VERSIONS

- **Color** : Black only

### WHEEL WEIGHTS

Wheel weight 810