


参照ホイール

F52301

CC40C Ft 16

ASTM CATEGORY 1 : road only
 For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included

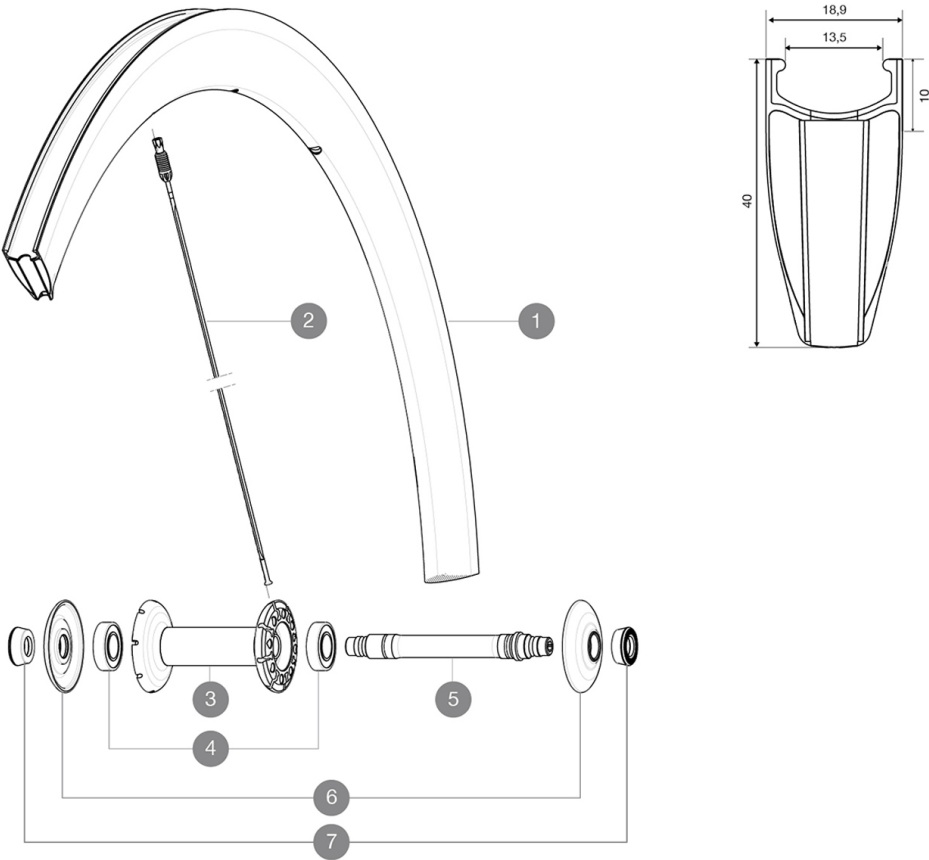

RIMS



バルブ穴径 (MM) : 6,5 :

1	32978210	FRONT RIM CC 40 C
---	----------	-------------------

SPOKES

2	V3664201	KIT 12 FRT/ND S STAINLESS SPOKE CC40 C 277mm
2	32979001	KIT 10 AERO FT/ND S CC 40 C BLACK SPOKE 277mm - while stock !

HUB SHELLS

3	N/A	HUB BODY
4	M40078	FRONT HUB 6901 BEARINGS
5	30870001	FRONT AXLE ROAD RIM BRAKING QRM +
6	32985701	HUB CAP & ADJUST.NUT CXR 80

ADAPTERS

7	35117301	FRONT OR REAR FORK REST KIT R-SYS 2013
---	----------	--



Cosmic Carbone 40 C

付属品

BR601 quick releases	
Carbon brake pads	
Multifonction adjustment wrench	
User guide	

Specifications

リム

- Material : 3K carbon fibers with aluminum cooling system
- Height : 40 mm
- Drilling : co-molded Fore drilled inserts
- Brake track : carbon
- Brake track : carbon with TgMAX technology
- Valve hole diameter : 6.5 mm
- Tyre : clincher
- ETRTO size : 622x13C
- Recommended tyre sizes : 21 to 28 mm

スポーク

- Material : steel
- Shape : straight pull, bladed, double butted
- Nipples : Fore integrated aluminum
- Count : front 16, rear 20
- Lacing : radial front and rear non-drive side, crossed 2 rear drive side

ホイールハブ

- Front and rear bodies : carbon center tube and aluminum flanges
- Axle material : aluminum
- Adjustable sealed cartridge bearings
- Freewheel : FTS-L steel

ホイールの重み

ホイール重量 (クイックリリースおよびクリンチャー/チューブラーを除く) (g) : 670