
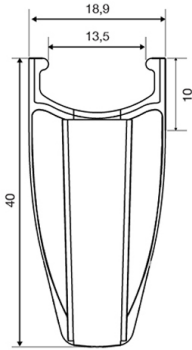


ASTM CATEGORY 1 : road only  
Recommended weight limit : 120kg

### REFERENCES WHEELS

F52301 CC40C Ft 16

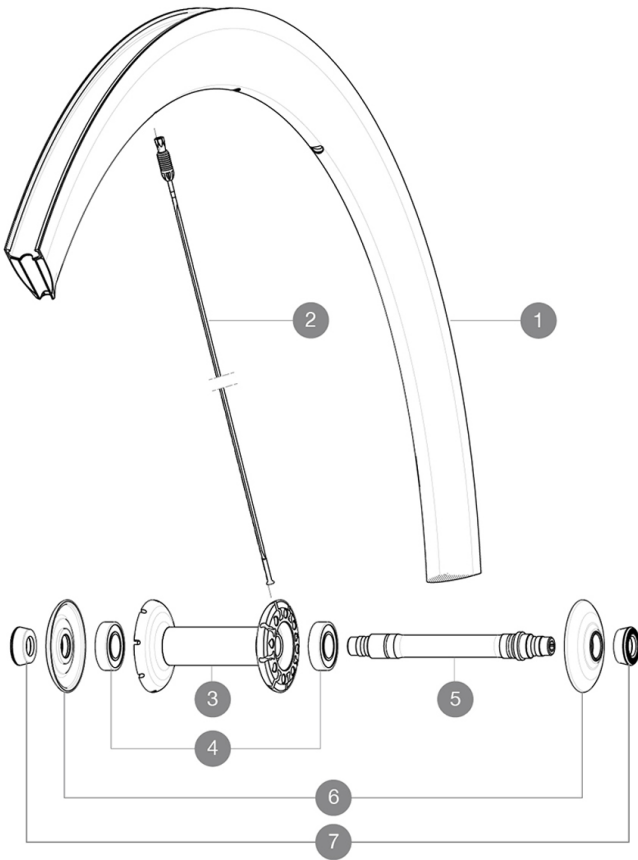

### RIMS



VALVE HOLE  $\bar{A}_{\bar{D}}$  (MM): 6,5 :

|   |          |                              |
|---|----------|------------------------------|
| 1 | 32978210 | KIT FRONT RIM CC 40 CLINCHER |
|---|----------|------------------------------|

### SPOKES

|   |          |                                                               |
|---|----------|---------------------------------------------------------------|
| 2 | 32979001 | KIT 10 AERO FT/ND S CC 40 C BLACK SPOKE 277mm - while stock I |
| 2 | V3664201 | KIT 12 FRT/ND S STAINLESS SPOKE CC40 C 277mm                  |

### HUB SHELLS

|   |          |                                   |
|---|----------|-----------------------------------|
| 3 | N/A      | HUB BODY                          |
| 4 | M40078   | FRONT HUB BEARINGS 6901 x 2       |
| 5 | 30870001 | FRONT AXLE ROAD RIM BRAKING QRM + |
| 6 | 32985701 | HUB CAP & ADJUSTING NUT CXR 80    |

### ADAPTERS

|   |          |                                                         |
|---|----------|---------------------------------------------------------|
| 7 | 35117301 | FT/RR FORK REST R-SYS/CC ULTIMATE > 2013/KSY PRO CARB T |
|---|----------|---------------------------------------------------------|

MAVIC

Cosmic Carbone 40 C

DELIVERED WITH

|                                 |  |
|---------------------------------|--|
| BR601 quick releases            |  |
| Carbon brake pads               |  |
| Multifunction adjustment wrench |  |
| User guide                      |  |

Specifications

RIMS

- **Material** : 3K carbon fibers with aluminum cooling system
- **Height** : 40 mm
- **Drilling** : co-molded Fore drilled inserts
- **Brake track** : carbon
- **Brake track** : carbon with TgMAX technology
- **Valve hole diameter** : 6.5 mm
- **Tyre** : clincher
- **ETRTO size** : 622x13C
- **Recommended tyre sizes** : 21 to 28 mm

SPOKES

- **Material** : steel
- **Shape** : straight pull, bladed, double butted
- **Nipples** : Fore integrated aluminum
- **Count** : front 16, rear 20
- **Lacing** : radial front and rear non-drive side, crossed 2 rear drive side

WHEEL HUB

- **Front and rear bodies** : carbon center tube and aluminum flanges
  - **Axle material** : aluminum
- Adjustable sealed cartridge bearings
- **Freewheel** : FTS-L steel

WHEEL WEIGHTS

Wheel weight 670