

ASTM CATEGORY 1 : road only

Pour optimiser la longévité des roues, Mavic recommande un poids maximal supporté par les roues de 120kg. Ce poids comprend les roues à galement


Dimensions de pneus recommandés : 21 Å 28 Å mm

Pression max. Å : 23 mm 8.7 Å bars / 130 Å PSI

RÉFÉRENCES ROUES

R99451 CosCarb40Elite16Rr Black
R99452 CosCarb40Elite16Rr White

R99453 CosCarb40Elite16Rr CHROME

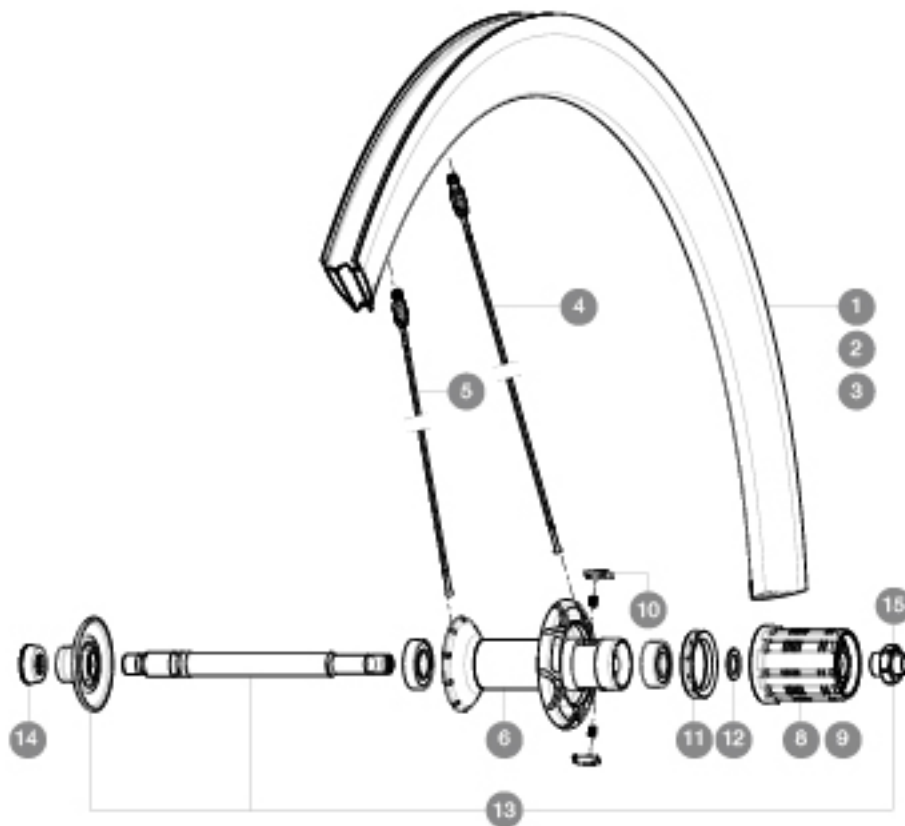

JANTES



TROU DE VALVE EN MM : 6,5

1	V2400713	JANTE ARR CC 40 ELITE BLANCHE
2	V2400913	JANTE ARR CC 40 ELITE NOIRE
3	V2404413	REAR RIM CC40 ELITE CHROME

RAYONS

4	V3664101	KIT 12 DRIVE SIDE STAINLESS SPOKE CC40 C 275mm
4	32978901	KIT 10 AERO DS CC 40 C BLACK SPOKE 275mm - while stock last
5	V3664201	KIT 12 FRT/NDSS STAINLESS SPOKE CC40 C 277mm
5	32979001	KIT 10 AERO FT/NDSS CC 40 C BLACK SPOKE 277mm - while stock l

MOYEURS

6	N/A	CORPS DE MOYEU
7	33000001	REAR HUB B9+6901 BEARINGS 2013
8	30871101	FTS-L FREEWHEEL BODY HG11 2013 (8 or 9mm axle compatible)
9	30871201	FTS-L FREEWHEEL BODY ED11 2013 (8 or 9mm axle compatible)
10	M40578	KIT CLIQUETS FTS "L" (ROUES ROUTE)
11	99500001	JOINT A LEVRE FTSX
12	30872801	SET OF 3 INTERNAL SILVER SPACERS 9mm FTS-L 2013
13	V2250301	KIT REAR AXLE AERO HUB CXR/CC40/CC SLS/CC SLE/COSMIC PRO CAR
15	V2373101	KIT NUT FOR ROAD ALLOY THROUGH AXLE 9mm

ADAPTATEURS

14	35117301	FRONT OR REAR FORK REST KIT R-SYS 2013
----	----------	--

Blocages rapides BR301	
Patins de frein carbone	
Blocages rapides BR301	
Patins de frein carbone	
ClÃ© de rÃ©glage multifonction	
Guide utilisateur	
ClÃ© de rÃ©glage multifonction	
Guide utilisateur	

Poids roue 875