


ASTM CATEGORY 1 : road only
 For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included
 Recommended tyre sizes: 25 to 32 mm
 23mm 8.7 bars - 125 psi, 25mm 7.7 bars - 110 psi
 Max. Pressure: 25mm 7.7 bars - 110 PSI

参照ホイール

F71851	Cos Pro Car Exa 17 Ft Cus	F54101	Cos Pro Car Exa 17 Ft
--------	---------------------------	--------	-----------------------

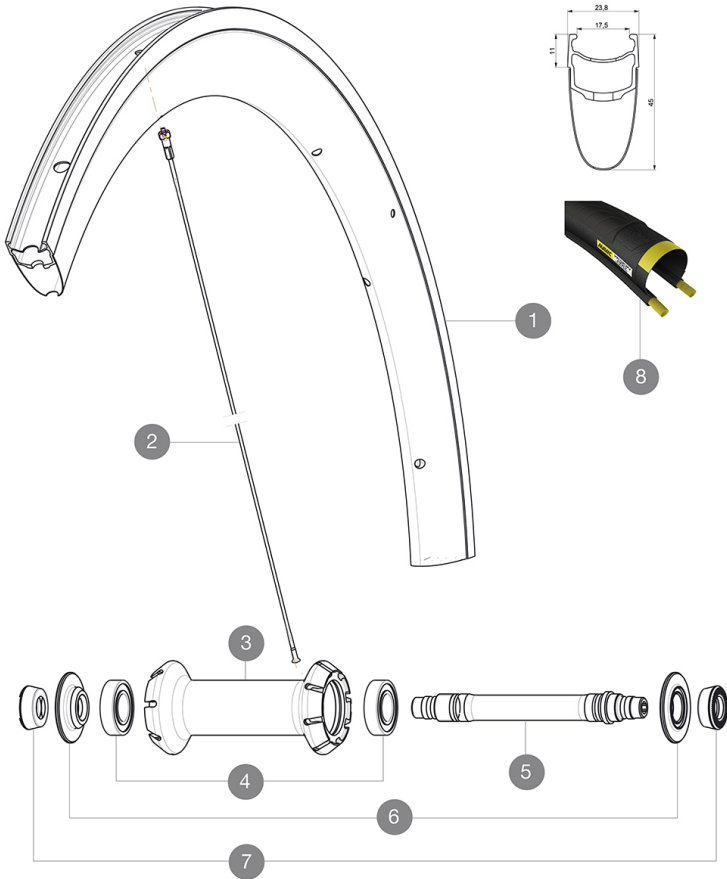

RIMS



&NBSP;:

1	V2407710	KIT FRONT RIM COSMIC PRO CARBON EXALITH GRAPHITE
---	----------	--

SPOKES

2	V3663401	KIT 12 FRT BUTTED AERO STAINLESS SPOKE 287 + alu nipple + wa
2	V2274501	KIT 8 FRT BUTTED AERO SPOKE 287mm/ALU NIPPLE - while stock I

HUB SHELLS

3	N/A	HUB BODY
4	M40078	FRONT HUB 6901 BEARINGS
5	30870001	FRONT AXLE ROAD RIM BRAKING QRM +
6	V2252501	FRONT SETTING NUT & DUST PROTECTOR MY16

OPTIONS

V2470401	BRAKE PADS Exalith Rim Pr Campagnolo
----------	--------------------------------------

TYRES

8	37805325	Yksion Pro GripLink White 25
---	----------	------------------------------

ADAPTERS

7	35117301	FRONT OR REAR FORK REST KIT R-SYS 2013
---	----------	--

Freewheel: Shimano/Sram or Campagnolo, convertible to XD-R with optional driver body	
$\hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_l \hat{A}_m \hat{A}_n : \hat{A}_o \hat{A}_p \hat{A}_q / \hat{A}_r \hat{A}_s \hat{A}_t \hat{A}_u$ $\hat{A}_v \hat{A}_w \hat{A}_x \hat{A}_y \hat{A}_z \hat{A}_{\bar{a}} \hat{A}_{\bar{b}} \hat{A}_{\bar{c}} \hat{A}_{\bar{d}} \hat{A}_{\bar{e}}$ $\hat{A}_{\bar{f}} \hat{A}_{\bar{g}} \hat{A}_{\bar{h}} \hat{A}_{\bar{i}} \hat{A}_{\bar{j}} \hat{A}_{\bar{k}} \hat{A}_{\bar{l}} \hat{A}_{\bar{m}} \text{XD-}$ $\text{R} \hat{A}_{\bar{n}} \hat{A}_{\bar{o}} \hat{A}_{\bar{p}}$	
$\hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_l \hat{A}_m \hat{A}_n : \hat{A}_o \hat{A}_p \hat{A}_q / \hat{A}_r \hat{A}_s \hat{A}_t \hat{A}_u$ $\hat{A}_v \hat{A}_w \hat{A}_x \hat{A}_y \hat{A}_z \hat{A}_{\bar{a}} \hat{A}_{\bar{b}} \hat{A}_{\bar{c}} \hat{A}_{\bar{d}} \hat{A}_{\bar{e}}$ $\hat{A}_{\bar{f}} \hat{A}_{\bar{g}} \hat{A}_{\bar{h}} \hat{A}_{\bar{i}} \hat{A}_{\bar{j}} \hat{A}_{\bar{k}} \hat{A}_{\bar{l}} \hat{A}_{\bar{m}} \text{XD-}$ $\text{R} \hat{A}_{\bar{n}} \hat{A}_{\bar{o}} \hat{A}_{\bar{p}}$	
Front axle: Quick Release only	
Front axle: Quick Release only	
Front axle: Quick Release only	
Rear axle: Quick Release only	
Rear axle: Quick Release only	
Rear axle: Quick Release only	

- Joint : SUP
- Drilling : traditional

Download date: 2024-05-07 / Update date: 2022-06-21