


ASTM CATEGORY 2 : road and offroad with jumps less than 15cm  
 Recommended weight limit : 120kg  
 Recommended tire sizes: 25 to 32 mm  
 Max. Pressure: 23mm 8.7 bars - 125 psi, 25/28mm 7.7 bars - 110 psi

### REFERENCES WHEELS

|        |                         |        |                         |
|--------|-------------------------|--------|-------------------------|
| F68701 | Aksium 17 D6B Ft QRx100 | F68801 | Aksium 17 DCL Ft QRx100 |
| F71621 | Aksium17DCLFtQRx100WTS  |        |                         |

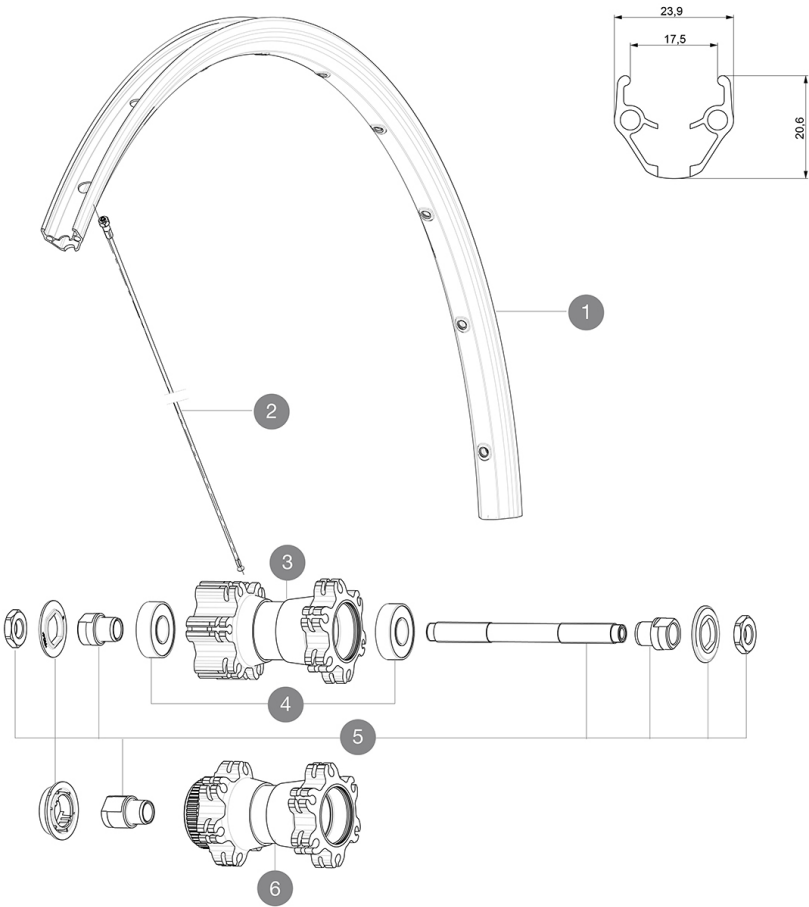

### RIMS



|   |          |                                              |
|---|----------|----------------------------------------------|
| 1 | V2290815 | KIT FRT/REAR RIM AKSIUM ONE DISC/AKSIUM DISC |
|---|----------|----------------------------------------------|

### SPOKES

|   |          |                                                              |
|---|----------|--------------------------------------------------------------|
| 2 | 36690301 | "KIT 12 FT/NDS XONE/XMAX - XA 29""/AKSIUM DISC 9 + 12 FT/AKS |
|---|----------|--------------------------------------------------------------|

### HUB SHELLS

|   |          |                         |
|---|----------|-------------------------|
| 4 | M40318   | KIT 2 HUB BEARINGS 6001 |
| 5 | 32347901 | FRONT AXLE QRM UB       |
| 6 | N/A      | HUB BODY                |

**DELIVERED WITH**

|                                                                              |                                                                                   |
|------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| BR101 quick releases<br>(M40350 frt, M40351 rear road, M40352 rear MTB)<br>1 |  |
| BR101 quick releases<br>(M40350 frt, M40351 rear road, M40352 rear MTB)<br>1 |  |
| Rim tape                                                                     |                                                                                   |
| Rim tape                                                                     |                                                                                   |
| User guide                                                                   |                                                                                   |
| User guide                                                                   |                                                                                   |

**COMPATIBILITY**

|                                                                              |  |
|------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body |  |
| Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body |  |
| Front axle: Quick Release only                                               |  |
| Front axle: Quick Release only                                               |  |
| Rear axle: Quick Release only                                                |  |
| Rear axle: Quick Release only                                                |  |

**Specifications****RIMS**

- **Material** : S6000 Aluminum
- **Material** : S6000 Aluminum
- **Height** : 21 mm
- **Height** : 21 mm
- **Joint** : pinned
- **Joint** : pinned
- **Drilling** : traditional with H2 reinforcement
- **Drilling** : traditional with H2 reinforcement
- Disc brake specific profile
- Disc brake specific profile
- **Valve hole diameter** : 6.5 mm
- **Valve hole diameter** : 6.5 mm
- **Tire** : clincher
- **Tire** : clincher
- **Internal width** : 17 mm
- **Internal width** : 17 mm
- **ETRTO size** : 622x17C
- **ETRTO size** : 622x17C

**SPOKES**

- **Material** : steel
- **Material** : steel
- **Shape** : straight pull, round
- **Shape** : straight pull, round
- **Nipples** : steel, ABS
- **Nipples** : steel, ABS
- **Count** : 24 front and rear
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2
- **Lacing** : front and rear crossed 2

**WHEEL HUB**

- **Front and rear bodies** : aluminum
- **Front and rear bodies** : aluminum
- **Axle material** : steel
- **Axle material** : steel
- Sealed cartridge bearings
- Sealed cartridge bearings
- **Freewheel** : FTS-L steel
- **Freewheel** : FTS-L steel

**VERSIONS**

- **Color** : Black only
- **Color** : Black only
- **Disc standard** : 6 Bolts or Center Lock(R)
- **Disc standard** : 6 Bolts or Center Lock(R)

**WHEEL WEIGHTS**

Wheel weight 940