

ASTM CATEGORY 1 : road only

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included


Recommended tyre sizes: 25 to 32 mm

25/28mm 7.7 bars - 110 PSI

Max. Pressure: 25mm 7.7 bars - 110 PSI

参照ホイール

F66701	ComPCarSI USTD6BFt12x100	F71881	ComPCarbSLCD12x100FtCLCus
F66801	ComPCarSI USTDCLFt12x100		

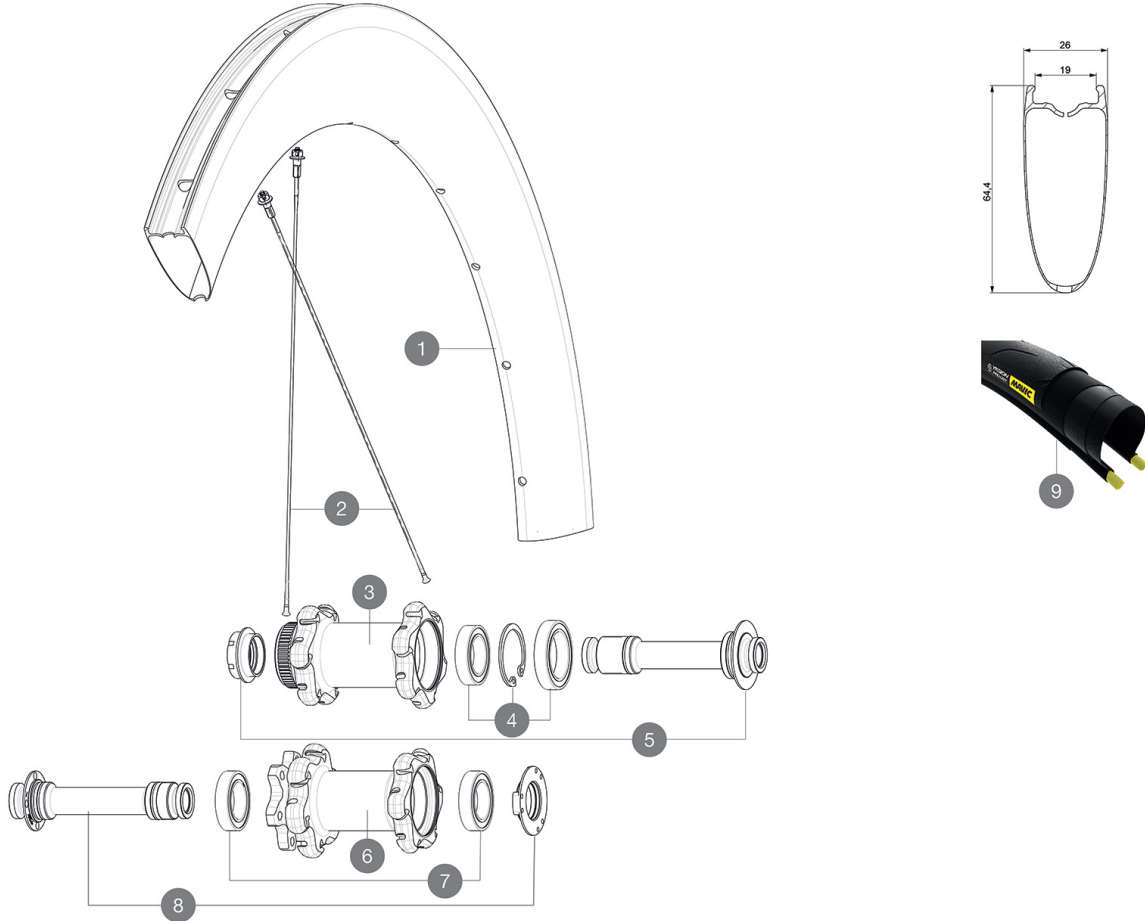

RIMS



&NBSP;:

1	V4093115	Kit Front/Rear rim Cosmic SL 65 Disc
1	V2732810	KIT FRONT RIM COMETE PRO CARBON SL UST DISC - while stock la
	V2620101	UST RIM TAPE 25mm (for 21-24mm wide rim)

SPOKES

2	V2278501	KIT 1 FT 247/FT 253/DS 236 COMETE PRO CARB SL T D SPK
2	V3662301	KIT 12 FRT/NDS COMETE PRO CARB SL T/UST D & DS COSMIC
2	V2278601	KIT 12 FT/NDS BUTTED AERO SPOKE 253mm - while stock last

HUB SHELLS

3	N/A	HUB BODY
4	99688601	BEARING KIT 9/15 DCL HUB 20x32x7 6804 + 25x37x7 6805
5	V2390701	KIT FRONT 12mm AXLE QRM+ CL
6	N/A	HUB BODY
7	M40076	HUB BEARINGS 17x30x7 6903 x 2
8	V2390601	KIT FRONT 12mm AXLE QRM+ 6B

OPTIONS

V2252401	MY16 FRONT AXLE ROAD DISC 9/12/15 CENTER LOCK
V2252301	MY16 FRONT AXLE ROAD DISC 9/12/15 INT

ADAPTERS

V2680301	"Kit Ft Road Adapter 12 >> 9mm"
B4104401	15mm FT Road Axle Adapters 16

1. Front axle: Shimano/Sram or Campagnolo, convertible to XD-R with optional driver body	
2. Front axle: convertible from 12mm thru axle to quick release or 15mm thru axle with optional adapters	
3. Front axle: convertible from 12mm thru axle to quick release or 15mm thru axle with optional adapters	
4. Rear axle: 12mm thru axle, convertible to Quick Release with optional adaptars	
5. Rear axle: 12mm thru axle, convertible to Quick Release with optional adaptars	

VERSIONS