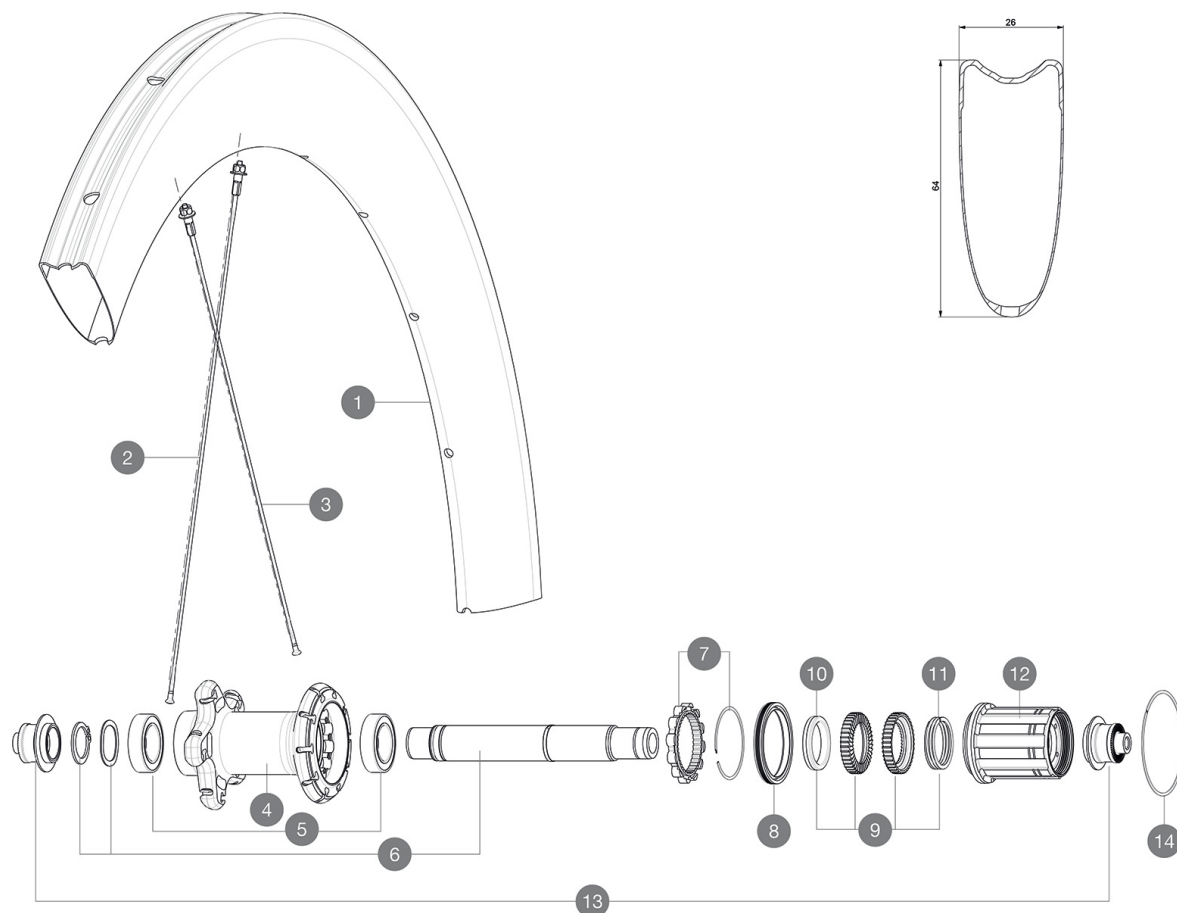


ASTM CATEGORY 1 : road only  
Recommended weight limit : 120kg  
Recommended tire sizes: 25 to 32 mm  
Max. Pressure: 23mm 8.7 bars - 125 psi, 25/28mm 7.7 bars - 110 psi  
Max. Pressure: 25mm 7.7 bars - 110 PSI

## REFERENCES WHEELS

R93501 Comete Pro Car SL T Rr



## RIMS



&NBSP;:

1 V2731313 KIT REAR RIM COMETE PRO CARBON SL T

## SPOKES

2 V3663901 KIT 12 NON DRIVE SIDE BUTTED AERO STAINLESS SPOKE 261 + alu  
2 V2278301 KIT 10 NDS BTD AERO SPOKE 261mm - while stock last  
3 V2278501 KIT 1 FT 247/FT 253/DS 236 COMETE PRO CARB SL T D SPK  
3 V2278401 KIT 10 DRIVE SIDE BUTTED AERO SPOKE 236mm  
3 V3662401 KIT 12 DS BUTTED AERO STAINLESS SPOKE 236 + alu nipp. + wash.

## HUB SHELLS

4 N/A HUB BODY  
5 V2560401 KIT 2 BEARINGS 17x28x7 + WAVED WASHER + CLIP  
6 V2252801 KIT ID360 UB REAR AXLE W/CLIP/WAVED WASHER  
7 V2252701 KIT ID360 INSERT SHAPED EAR LOBE > 2017  
8 V2251601 KIT ID360 SEAL + GREASE  
9 V2251701 KIT ID360 2 RATCHETS + SPRING + GREASE  
10 V2500501 KIT ID360 3 PADS NOISE REDUCING  
11 V2251801 KIT 3 ID360 ROAD SPRINGS  
12 V3430101 HG11 Freewheel Body ID360  
14 V2252201 KIT 2 REAR HUB RETENTION RINGS 48mm



## TYRES

15 37804425 Yksion Pro GripTub SSC

## ADAPTERS

13 V2253101 KIT REAR AXLE ADAPTOR QUICK RELEASE ID360

## DELIVERED WITH

|                                                                                 |                                                                                    |
|---------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| BR601 quick releases<br>(V24 501 01 frt, V24 502 01 rear)<br>1                  |   |
| BR601 quick releases<br>(V24 501 01 frt, V24 502 01 rear)<br>1                  |   |
| Carbon brake pads<br>(V24 603 01 Shimano/Sram, V24 604 01 Campagnolo)<br>1 pair |   |
| Carbon brake pads<br>(V24 603 01 Shimano/Sram, V24 604 01 Campagnolo)<br>1 pair |   |
| Valve extender<br>(118 952 01)<br>1                                             |   |
| Valve extender<br>(118 952 01)<br>1                                             |   |
| Multifunction adjustment wrench<br>(325 423 01)<br>1                            |   |
| Multifunction adjustment wrench<br>(325 423 01)<br>1                            |  |
| User guide                                                                      |                                                                                    |
| User guide                                                                      |                                                                                    |

## COMPATIBILITY

|                                                                                      |  |
|--------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram or Campagnolo, convertible to XD-R with optional driver body |  |
| Front axle: Quick Release only                                                       |  |
| Front axle: Quick Release only                                                       |  |
| Rear axle: Quick Release only                                                        |  |
| Rear axle: Quick Release only                                                        |  |

## Specifications

## RIMS

- **Material** : 3K carbon fibers
- **Material** : 3K carbon fibers
- **Height** : 64mm
- **Height** : 64mm
- **Drilling** : traditional
- **Drilling** : traditional
- **Brake track** : carbon with TgMAX technology
- **Brake track** : carbon with TgMAX technology
- **Valve hole diameter** : 6.5 mm
- **Valve hole diameter** : 6.5 mm
- **Tire** : tubular
- **Tire** : tubular
- **ETRTO size** : 28" tubular
- **ETRTO size** : 28" tubular

## SPOKES

- **Material** : steel
- **Material** : steel
- **Shape** : straight pull, aero, double butted
- **Shape** : straight pull, bladed, double butted
- **Nipples** : aluminum, ABS
- **Nipples** : aluminum, ABS
- **Count** : front 18, rear 20
- **Count** : front 18, rear 24
- **Lacing** : front radial, rear Isopulse
- **Lacing** : front radial, rear Isopulse

## WHEEL HUB

- **Front and rear bodies** : aluminum
- **Front and rear bodies** : aluminum
- **Axle material** : aluminum
- **Axle material** : aluminum
- **Front bearings** : adjustable sealed cartridge bearings (QRM+), Rear bearings auto adjust sealed cartridge bearings (QRM Auto)
- **Sealed cartridge bearings**
- **Freewheel** : Instant Drive 360
- **Freewheel** : Instant Drive 360

## VERSIONS

- **Color** : Black only
- **Color** : Black only

## WHEEL WEIGHTS

Wheel weight