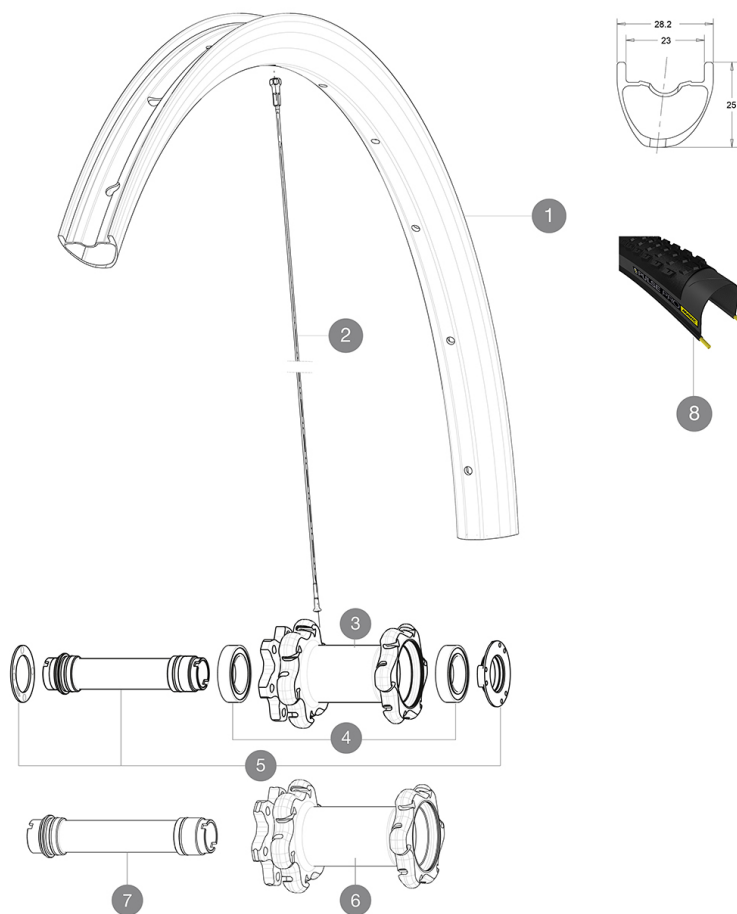


ASTM CATEGORY 3 : offroad with jumps less than 61cm  
Recommended weight limit : 120kg  
Recommended tire sizes: 28 mm to 62 mm (1.1" to 2.5")

## REFERENCES WHEELS



### RIMS



VALVE HOLE (MM): 6,5 :

|   |          |                                          |
|---|----------|------------------------------------------|
| 1 | V3100110 | KIT FRONT RIM CROSSMAX PRO CARBON 29"    |
|   | V2620101 | UST RIM TAPE 25mm (for 21-24mm wide rim) |

### SPOKES

|   |          |                                               |
|---|----------|-----------------------------------------------|
| 2 | V2384601 | KIT 12 FT/NDS CROSSMAX PRO CARB 29" SPK 292mm |
|---|----------|-----------------------------------------------|

### HUB SHELLS

|   |          |                                           |
|---|----------|-------------------------------------------|
| 3 | N/A      | HUB BODY                                  |
| 4 | 99688501 | BEARING KIT 9/12/15 D6T HUB 20x32x7 6804  |
| 5 | V2252301 | KIT MY16 FRONT AXLE ROAD DISC 9/12/15 INT |
| 6 | N/A      | HUB BODY                                  |
| 7 | V2370701 | KIT FRONT QRM+ AXLE BOOST INTL 110mm      |

### OPTIONS

|          |                                          |
|----------|------------------------------------------|
| V2650201 | ADAPTER Front Torque Cap 15x31 MTB QRM + |
|----------|------------------------------------------|

### TYRES

|   |          |              |
|---|----------|--------------|
| 8 | 39243232 | Pulse Pro 29 |
| 8 | 39243221 | Pulse Pro 29 |



### ADAPTERS

|          |                        |
|----------|------------------------|
| B4104301 | ADAPTER Ft 9mm QR QRM+ |
|----------|------------------------|



# Crossmax Pro Carbon 29

## DELIVERED WITH

|                                                                                           |                                                                                     |
|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 1 bottle of Mavic Sealant<br>(355 466 01)<br>1                                            |    |
| BX601 quick releases<br>(V24 503 01 frt, V24 504 01 rear)<br>1                            |    |
| Front QR adapters<br>(996 941 01 for MTB or B41 043 01 for road)<br>1                     |    |
| Rear 12x142mm adapters for ITS4 and TS2<br>(308 593 01 for ITS4, 329 650 01 for TS2)<br>1 |    |
| UST valve and accessories<br>(129 838 01)                                                 |    |
| UST valve and accessories<br>(129 838 01)                                                 |    |
| Specific disc bolts<br>(308 719 01)<br>Pack of 6                                          |    |
| Tubeless rim tape                                                                         |                                                                                     |
| Tubeless rim tape                                                                         |                                                                                     |
| Multifunction adjustment wrench<br>(325 423 01)<br>1                                      |  |
| Multifunction adjustment wrench<br>(325 423 01)<br>1                                      |  |
| User guide                                                                                |                                                                                     |
| User guide                                                                                |                                                                                     |

## COMPATIBILITY

|                                                                                     |  |
|-------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to XD with optional driver body                |  |
| Freewheel: Shimano/Sram or XD                                                       |  |
| Front axle: convertible from 15mm thru axle to Quick Release with included adapters |  |
| Front axle: convertible from 15mm thru axle to Quick Release with included adapters |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters      |  |

## Specifications

### RIMS

- **Material** : 100% Unidirectional carbon fiber
- **Material** : 100% Unidirectional carbon fiber
- **Joint** : SUP
- **Drilling** : traditional
- **Drilling** : traditional
- **Valve hole diameter** : 6.5 mm
- **Valve hole diameter** : 6.5 mm
- **Tire** : UST Tubeless and tubetype
- **Tire** : UST Tubeless and tubetype
- **Internal width** : 23 mm
- **Internal width** : 23 mm
- **ETRTO size 27.5"** : 584x23ss
- **ETRTO size 27.5"** : 584x23ss
- **ETRTO size 29"** : 622x23ss
- **ETRTO size 29"** : 622x23ss

Hookless profile

Hookless profile

Use with Mavic Tubeless Tape

Use with Mavic Tubeless Tape

### WHEEL HUB

- **Front and rear bodies** : aluminum
- **Front and rear bodies** : aluminum
- **Axle material** : aluminum
- **Axle material** : aluminum
- Adjustable sealed cartridge bearings
- Adjustable sealed cartridge bearings
- **Freewheel** : ITS-4 alloy
- **Freewheel** : ITS-4 alloy

### VERSIONS

- **Color** : Black only
- **Color** : Black only
- **Disc standard** : 6 Bolts only
- **Disc standard** : 6 Bolts only
- **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- Lefty Supermax
- Lefty Supermax

### WHEEL WEIGHTS

Wheel weight

Weight Front 27.5": 680

Weight Front 29": 700