

ASTM CATEGORY 3 : offroad with jumps less than 61cm


For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included

Recommended tyre sizes: 28 mm to 62 mm (1.1" to 2.5")

Recommended tyre sizes: 36 mm to 64 mm (1.4" to 2.5")

参照ホイール

F54801 XmxPro27.5Ft

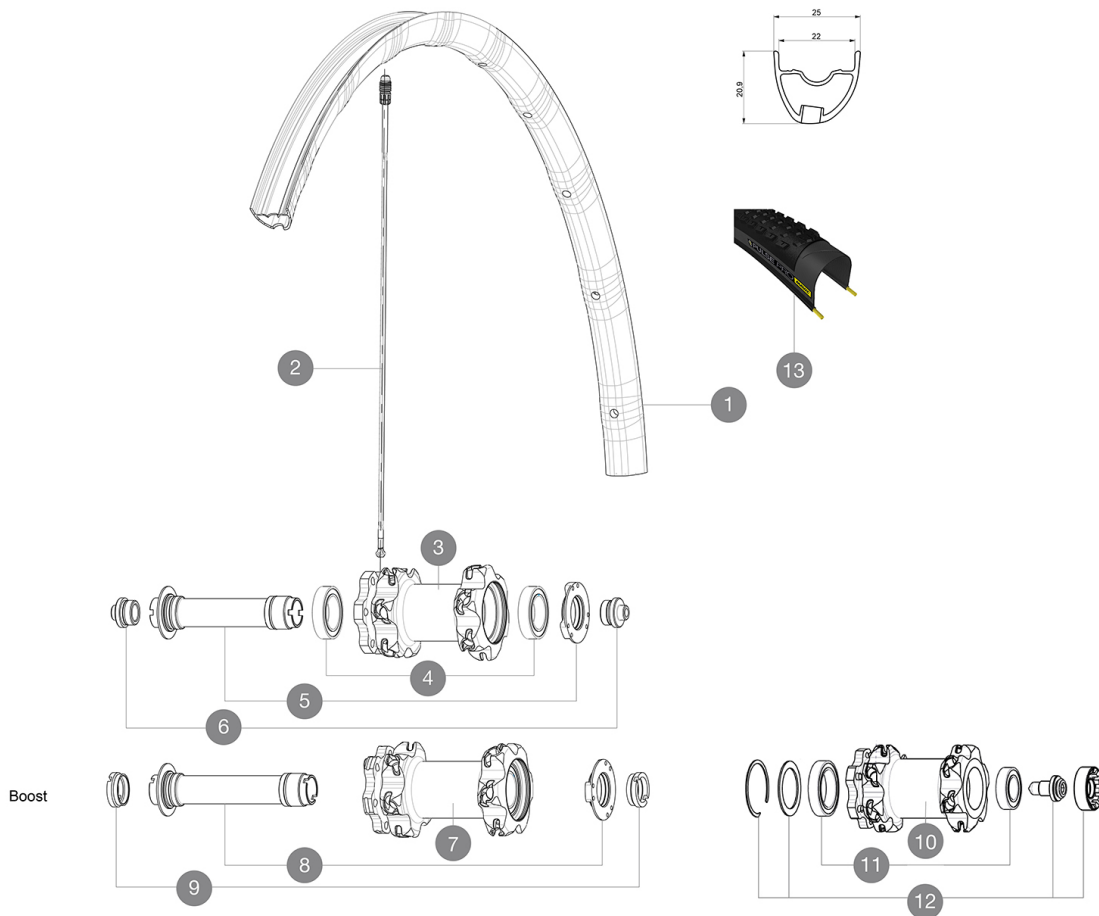

RIMS



Ä □ □ Ä □ « Ä □ □ Ç © ' Ä % □ ï % □ MM ï % □ ï % □ 6,5 :

| | | |
|---|----------|--|
| 1 | V2316010 | KIT FRONT RIM CROSSMAX PRO 27,5" 22TSS |
|---|----------|--|

SPOKES

| | | |
|---|----------|--|
| 2 | V2386401 | KIT 1 275mm 27,5" + 1 293mm 29" CROSSMAX PRO STAMPED |
| 2 | V2384701 | RIGHT FRONT + 1 REAR NON-DRIVE SIDE BUTTED ZICRAL SPOKES 2 |

HUB SHELLS

| | | |
|----|----------|---------------------------------------|
| 3 | N/A | HUB BODY |
| 4 | 99688501 | BEARING KIT 9/15 D6T HUB |
| 5 | V2252301 | MY16 FRONT AXLE ROAD DISC 9/12/15 INT |
| 7 | N/A | HUB BODY |
| 8 | V2370701 | KIT FRONT QRM+ AXLE BOOST INTL 110mm |
| 10 | N/A | HUB BODY |
| 11 | M40771 | BEARING KIT FOR LEFTY HUB |
| 12 | 36709301 | ASSEMBLY KIT CROSSROC SUPERMAX |

OPTIONS

| | |
|----------|--|
| V2650201 | ADAPTER Front Torque Cap 15x31 MTB QRM + |
|----------|--|

TYRES

| | | |
|----|----------|----------------------|
| 13 | 39243132 | Pulse Pro 27,5" 2.25 |
| 13 | 39243121 | Pulse Pro 27,5" 2.1 |












ADAPTERS

| | | |
|---|----------|-------------------------------|
| 6 | B4104301 | 9mm FT road Axle Adapters 16 |
| 9 | B4104401 | 15mm FT Road Axle Adapters 16 |

MAVIC

Crossmax Pro

付属品

| | |
|---|---|
| 1 bottle of Mavic Sealant (355 466 01) 1 |  |
| BX601 quick releases (V24 503 01 frt, V24 504 01 rear) 1 |  |
| BX601 quick releases (V24 503 01 frt, V24 504 01 rear) 1 |  |
| Front QR adapters (996 941 01 for MTB or B41 043 01 for road) 1 |  |
| Front QR adapters (996 941 01 for MTB or B41 043 01 for road) 1 |  |
| ITS4 TS2 QRA (308 731 01) | |
| Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2) 1 |  |
| Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2) 1 |  |
| UST valve and accessories (129 838 01) |  |
| UST valve and accessories (129 838 01) |  |
| Multifunction adjustment wrench (325 423 01) 1 |  |
| Multifunction adjustment wrench (325 423 01) 1 |  |
| User guide | |
| User guide | |

COMPATIBILITY

| | |
|---|--|
| Freewheel: Shimano/Sram, convertible to XD with optional driver body | |
| Freewheel: Shimano/Sram or XD | |
| Front axle: convertible from 15mm thru axle to Quick Release with included adapters | |
| Front axle: convertible from 15mm thru axle to Quick Release with included adapters | |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters | |
| Rear axle: 12mm thru axle, convertible to Quick Release with included adapters | |

Specifications

リム

- Material : Mxaltal
- Material : Mxaltal
- Joint : SUP
- Joint : SUP
- Drilling : Fore
- Drilling : Fore
- Weight reduction : ISM 4D
- Weight reduction : ISM 4D
- Valve hole diameter : 6.5 mm
- Valve hole diameter : 6.5 mm
- Tyre : UST Tubeless and tubetype
- Tyre : UST Tubeless and tubetype
- Internal width : 22 mm
- Internal width : 22 mm
- ETRTO size 27.5" : 584x22ss
- ETRTO size 27.5" : 584x22ss

ホイールハブ

- Front and rear bodies : aluminum
- Front and rear bodies : aluminum
- Axle material : aluminum
- Axle material : aluminum
- Sealed cartridge bearings
- Sealed cartridge bearings
- Freewheel : ITS-4 alloy
- Freewheel : ITS-4 alloy

VERSIONS

- Color : Black only
- Color : Black only
- Disc standard : 6 Bolts only
- Disc standard : 6 Bolts only
- Hub width : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)

ホイールの重み

- ホイール重量 (クイックリリースおよびクリンチャー/チューブラーを除く) (g) :
- Weight Front 27.5": 700
- Weight Front 29": 730