


ASTM CATEGORY 3 : offroad with jumps less than 61cm
 Recommended weight limit : 120kg
 Recommended tire sizes: 28 mm to 62 mm (1.1" to 2.5")
 Recommended tyre sizes: 36 mm to 64 mm (1.4" to 2.5")

REFERENCES WHEELS



RIMS

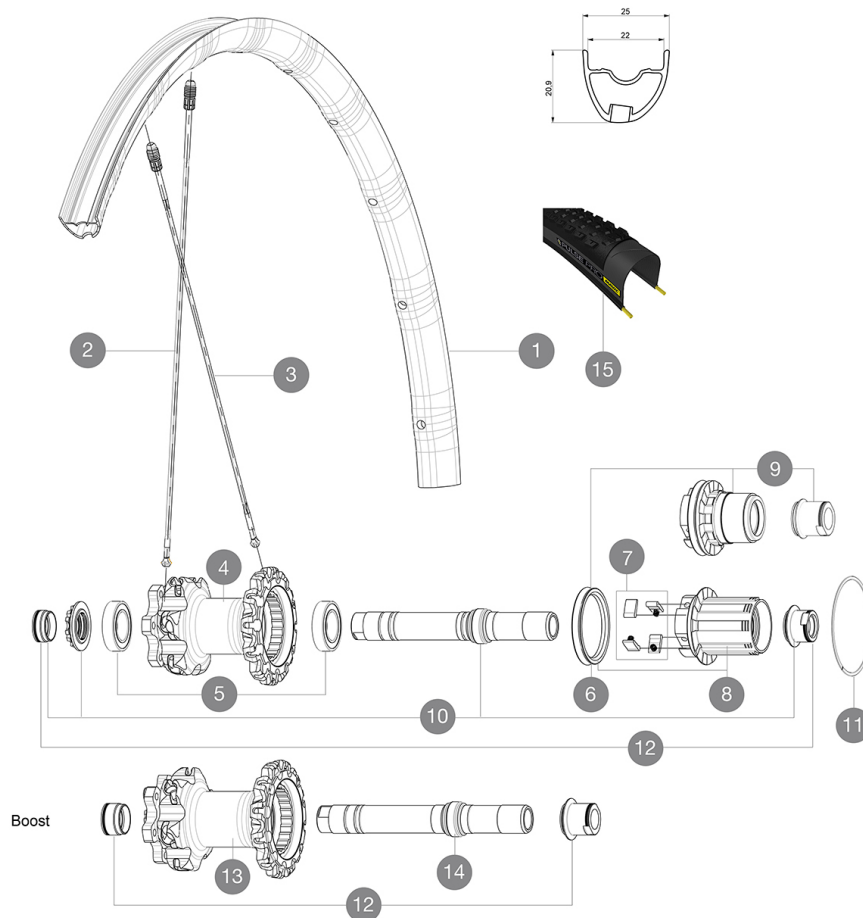

Ø VALVE HOLE (MM): 6,5 :

| | | |
|---|----------|---|
| 1 | V2317613 | KIT RR RIM CROSSMAX PRO 27,5" 22mm TSS OFFSET |
| 1 | V2316113 | KIT REAR RIM CROSSMAX PRO 27,5" 22mm TSS |

SPOKES

| | | |
|---|----------|--|
| 2 | V2386401 | KIT 1 275mm 27,5" + 1 293mm 29" CROSSMAX PRO STAMPED BUTTE |
| 2 | V2384701 | KIT 12 FT/NDS CROSSMAX PRO 27,5" SPK 275mm |
| 3 | 36675101 | "KIT 10 DS XMAX SLR/END/PRO/DEEMAX PRO 27,5"" SPK 251,5mm" |

HUB SHELLS

| | | |
|----|----------|---|
| 4 | N/A | HUB BODY |
| 5 | M40076 | HUB BEARINGS 17x30x7 6903 x 2 |
| 6 | 99610701 | ITS-4 FREEWHEEL SEAL |
| 7 | 99610601 | PAWLS KIT FOR ITS-4 (OR TS-2) |
| 8 | 35126001 | ITS-4 FREEWHEEL BODY + SEAL 2013 (NO PAWLS) |
| 9 | 35684101 | FREEHUB BODY XD TS2/ITS-4 |
| 10 | 30870401 | REAR QRM + AXLE KIT ITS4 135mm from 2012 |
| 11 | 30871801 | ELASTIC RING 56mm diam. ITS-4 20 SPOKES |
| 13 | N/A | HUB BODY |
| 14 | V2370801 | KIT REAR QRM+ AXLE BOOST ITS-4 148mm |

TYRES












| | | |
|----|----------|----------------|
| 15 | 39243132 | Pulse Pro 27.5 |
| 15 | 39243121 | Pulse Pro 27.5 |

ADAPTERS

| | | |
|----|----------|--|
| 12 | 30872201 | FRAME SUPPORT ITS-4 135mm REAR AXLE > 2012 |
| | 30873101 | 2 REAR REDUCERS 12/9,5mm 2012 ITS4 HUB |

MAVIC Crossmax Pro

DELIVERED WITH

| | |
|---|---|
| 1 bottle of Mavic Sealant (355 466 01) 1 |  |
| BX601 quick releases (V24 503 01 frt, V24 504 01 rear) 1 |  |
| BX601 quick releases (V24 503 01 frt, V24 504 01 rear) 1 |  |
| Front QR adapters (996 941 01 for MTB or B41 043 01 for road) 1 |  |
| Front QR adapters (996 941 01 for MTB or B41 043 01 for road) 1 |  |
| Rear QR adapters for ITS4 and TS2 (308 731 01) | |
| Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2) 1 |  |
| Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2) 1 |  |
| UST valve and accessories (129 838 01) |  |
| UST valve and accessories (129 838 01) |  |
| Multifunction adjustment wrench (325 423 01) 1 |  |
| Multifunction adjustment wrench (325 423 01) 1 |  |
| User guide | |
| User guide | |

COMPATIBILITY

| | |
|---|--|
| Freewheel: Shimano/Sram, convertible to XD with optional driver body | |
| Freewheel: Shimano/Sram or XD | |
| Front axle: convertible from 15mm thru axle to Quick Release with included adapters | |
| Front axle: convertible from 15mm thru axle to Quick Release with included adapters | |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters | |
| Rear axle: 12mm thru axle, convertible to Quick Release with included adapters | |

Specifications

RIMS

- Material : Mxtral
- Material : Mxtral
- Joint : SUP
- Joint : SUP
- Drilling : Fore
- Drilling : Fore
- Weight reduction : ISM 4D
- Weight reduction : ISM 4D
- Valve hole diameter : 6.5 mm
- Valve hole diameter : 6.5 mm
- Tire : UST Tubeless and tubetype
- Tire : UST Tubeless and tubetype

Internal width : 22 mm Update date: 2022-05-31

Internal width : 22 mm

ETRTO size 27.5" : 584x22ss

WHEEL HUB

- Front and rear bodies : aluminum
 - Front and rear bodies : aluminum
 - Axle material : aluminum
 - Axle material : aluminum
- Sealed cartridge bearings
Sealed cartridge bearings
- Freewheel : ITS-4 alloy
 - Freewheel : ITS-4 alloy

VERSIONS

- Color : Black only
- Color : Black only
- Disc standard : 6 Bolts only
- Disc standard : 6 Bolts only
- Hub width : Boost (front 110, rear 148) or Non-

WHEEL WEIGHTS

Wheel weight
Weight Rear 27.5": 835
Weight Rear 29": 865