


ASTM CATEGORY 3 : offroad with jumps less than 61cm  
 Recommended weight limit : 120kg  
 Recommended tire sizes: 28 mm to 62 mm (1.1" to 2.5")  
 Recommended tyre sizes: 36 mm to 64 mm (1.4" to 2.5")

## REFERENCES WHEELS

FRONT WHEEL	N°	PARTS	REFERENCE	REFERENCE BOOST
	3BIS / 8BIS	HUB BODY	N/A	N/A
CROSSMAX ELITE	5 BIS	AXLE	V2372301	V2372401
	9 BIS	ADAPTORS	V2372501	V2372501

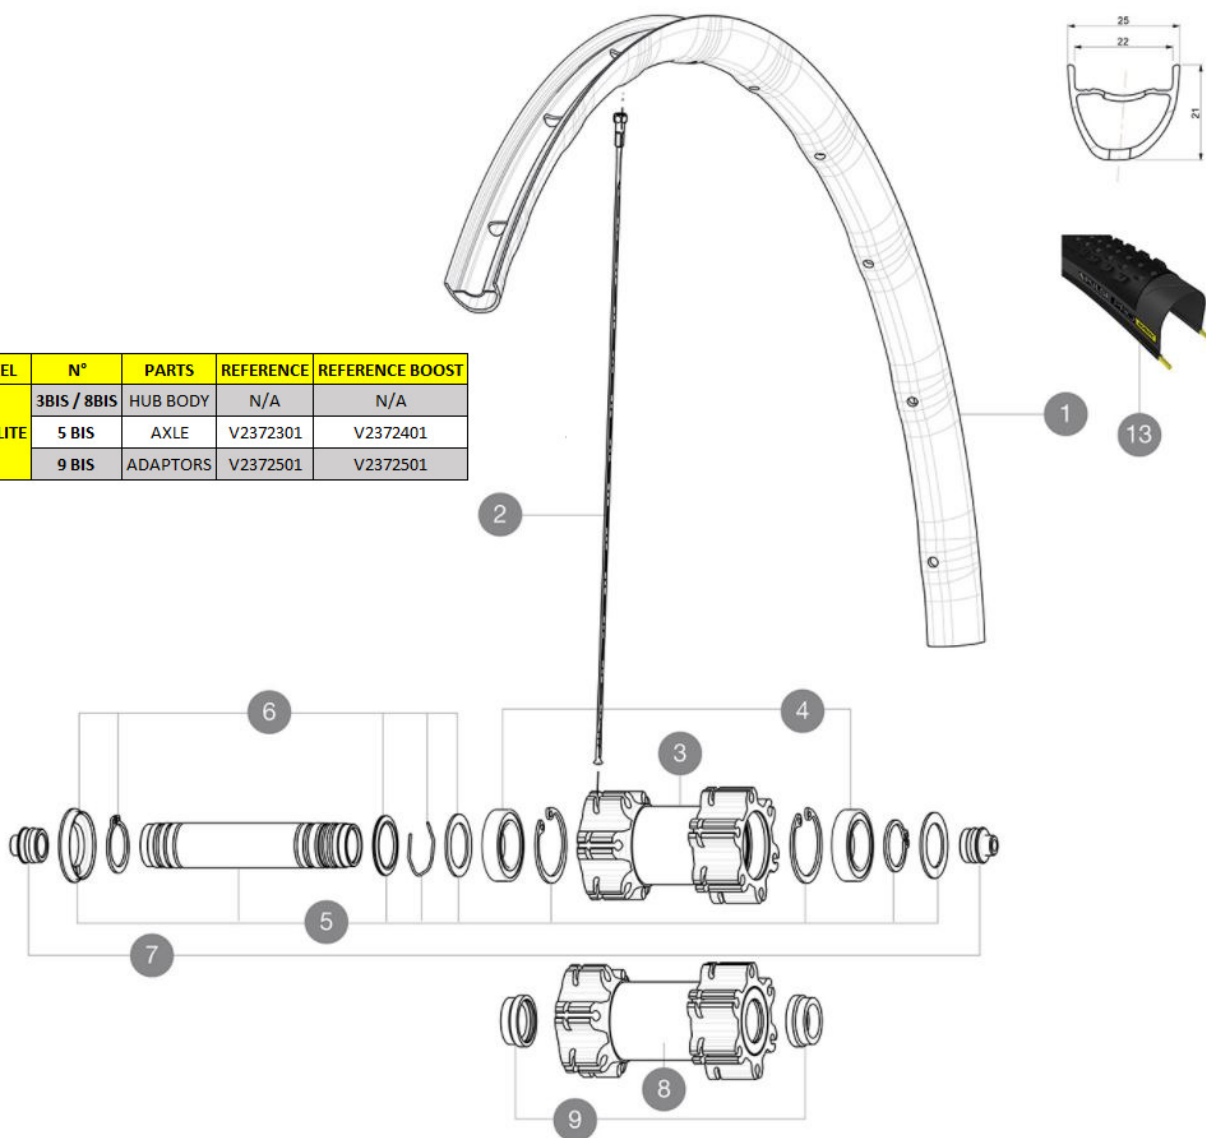

### RIMS



VALVE HOLE (MM): 6,5 :

1	V2940115	KIT FT/RR RIM CROSSMAX EL 27,5" 22mm BLK TSS
1	V2960115	KIT FT/RR RIM CROSSMAX EL 27,5" 22mm RED TSS
	V2620101	UST RIM TAPE 25mm (for 21-24mm wide rim)

### SPOKES

2	V2381101	KIT 12 FT/NDS XRIE UST/FT XMAX EL/XA EL 27,5" SPK 278mm
---	----------	---

### HUB SHELLS

3	N/A	HUB BODY
3	N/A	HUB BODY
	N/A	HUB BODY
4	99688501	BEARING KIT 9/12/15 D6T HUB 20x32x7 6804
5	V2371101	KIT FRONT QRM AXLE 100mm/BOOST 110mm
	V2372301	KIT 100mm AXLE QRM AUTO MTB > 2019
	V2372401	KIT 110mm AXLE QRM AUTO MTB > 2019
6	V2370301	KIT FRONT AUTO ADJUSTING PLAY 15mm AXLE

8	N/A	HUB BODY
8	N/A	HUB BODY
	N/A	HUB BODY
10	N/A	HUB BODY
11	M40771	BEARING KIT FOR LEFTY 50 & 60 HUB
12	36709301	ASSEMBLY KIT FOR LEFTY SUPERMAX WHEELS

### TYRES

13	39243132	Pulse Pro 27.5
13	39243121	Pulse Pro 27.5









### ADAPTORS

7	99694101	ADAPTER Ft 15 to 9mm QR
9	V2371301	YELL FT AXLE SUPPORT BOOST 110mm SELF ADJUST
	V2372501	15mm MTB Axle Cap QRM Auto From 2019

# MAVIC Crossmax Elite

2017  
FRONT

## DELIVERED WITH

1 bottle of Mavic Sealant (355 466 01) 1	
BX601 quick releases (V24 503 01 frt, V24 504 01 rear)	
BR101 quick releases (M40350 frt, M40351 rear road, M40352 rear MTB) 1	
Front QR adapters (996 941 01 for MTB or B41 043 01 for road) 1	
Front QR adapters (996 941 01 for MTB or B41 043 01 for road) 1	
Rear QR adapters for ITS4 and TS2 (308 731 01)	
Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2) 1	
Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2) 1	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
Tubeless rim tape	
Tubeless rim tape	

## COMPATIBILITY

Freewheel: Shimano/Sram, convertible to XD with optional driver body	
Freewheel: Shimano/Sram or XD	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with included adapters	

## Specifications

### RIMS

- **Material** : Mxstal
  - **Material** : Mxstal
  - **Joint** : SUP
  - **Joint** : SUP
  - **Drilling** : traditional
  - **Drilling** : traditional
  - **Weight reduction** : ISM 4D
  - **Weight reduction** : ISM 4D
  - **Valve hole diameter** : 6.5 mm
  - **Valve hole diameter** : 6.5 mm
  - **Tire** : UST Tubeless and tubetype
  - **Tire** : UST Tubeless and tubetype
  - **Internal width** : 22 mm
  - **Internal width** : 22 mm
  - **ETRTO size 27.5"** : 584x22ss
  - **ETRTO size 27.5"** : 584x22ss
  - **ETRTO size 29"** : 622x22ss
  - **ETRTO size 29"** : 622x22ss
- Hookless profile  
Use with Mavic Tubeless Tape  
Use with Mavic Tubeless Tape

### WHEEL HUB

- **Front and rear bodies** : aluminum
  - **Front and rear bodies** : aluminum
  - **Axle material** : aluminum
  - **Axle material** : aluminum
- Sealed cartridge bearings  
Sealed cartridge bearings
- **Freewheel** : ITS-4 alloy
  - **Freewheel** : ITS-4 alloy

### VERSIONS

- **Color** : Black or Black/Red
  - **Color** : Black or Black/Red
  - **Disc standard** : 6 Bolts only
  - **Disc standard** : 6 Bolts only
  - **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
  - **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- Lefty Supermax  
Lefty Supermax

### WHEEL WEIGHTS

Wheel weight  
Weight Front 27.5": 750  
Weight Front 29": 785

### SPOKES

Download date: 2022-08-11 / Update date: 2022-03-01

- **Material** : steel
- **Material** : steel