


参照ホイール

ASTM CATEGORY 3: offroad with jumps less than 61cm

For a longer longevity of the wheel, Mavic recommends that the total weight supported by

the wheels don't exceed 120kg, bike included Recommended tyre sizes: 35 mm to 69 mm (1.4" to 2.7") Recommended tyre sizes: 46 to 64 mm (1.8" to 2.5")

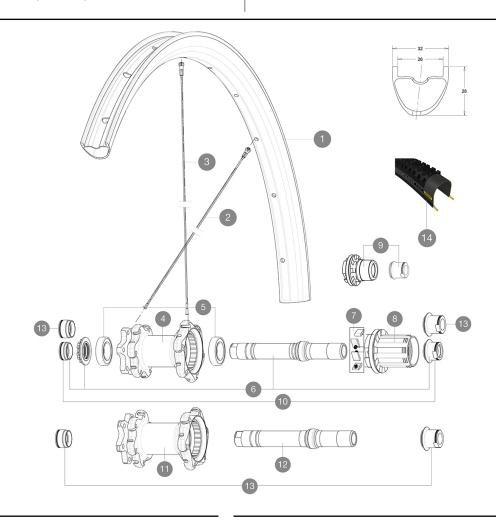

RIMS



1	V3050113	KIT REAR RIM XA PRO CARBON 27,5"
	V2700101	UST Tape 28mm for 25 to 27mm wide rims

SPOKES

2	V2385001	KIT 12 FRONT + REAR NON-DRIVE SIDE BUTTED SPOKES 272mm
3	V2384901	於中界 REAR DRIVE SIDE BUTTED SPOKES 270mm XA PRO
U		CARBON 27.

HUB SHELLS

4	N/A	HUB BODY	
5	M40076	HUB BEARINGS 17x30x7 6903 x 2	
6	30870401	REAR AXLE KIT ITS4 135mm D6T/DCL 2012	
7	99610601	ITS4 PAWLS KIT	
8	99610701	ITS4 SEAL	
8	35126001	ITS-4 FREEWHEEL BODY + SEAL 2013 (WITHOUT PAWLS)	
9	35684101	ITS-4 FREEWHEEL BODY XD +SEAL 2013 (WITHOUT PAWLS)	
11	N/A	HUB BODY	
12	V2370801	KIT REAR QRM+ AXLE BOOST ITS-4 148mm	

TYRES

14 39243324 Quest Pro 27,5x2.40

ADAPTERS

10	30872201	FORK REST ITS-4 135mm REAR AXLE > 2012
13	30859301	AXLE ADAPTER Rr 12x142/148mm Pro Carb MTB (Grey)
	30873101	2 REAR REDUCERS 12/9,5mm 2012 ITS4 HUB



MAVIC XA Pro Carbon

付属品

付属品				
1 bottle of Mavic Sealant (355 466 01) 1				
BX601 quick releases (V24 503 01 frt, V24 504 01 rear) 1	MAUIC			
BX601 quick releases (V24 503 01 frt, V24 504 01 rear) 1	MAUNC MAUNC			
Front QR adapters (996 941 01 for MTB or B41 043 01 for road)				
Front QR adapters (996 941 01 for MTB or B41 043 01 for road)				
ITS4 ¿¿¿ TS2¿¿¿QR¿¿¿¿¿ (308 731 01)				
Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2)				
Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2)				
UST valve and accessories (129 838 01)	ST 9 OFF			
UST valve and accessories (129 838 01)	Stranger to the stranger to th			
Tubeless rim tape	-			
Tubeless rim tape				
Multifonction adjustment wrench (325 423 01)				
Multifonction adjustment wrench (325 423 01) 1				
User guide				
User guide				

COMPATIBILITY

COMPATIBLIT				
Freewheel: Shimano/Sram, convertible to XD with optional driver body				
Freewheel: Shimano/Sram or XD				
Front axle: convertible from 15mm thru axle to Quick Release with included adapters				
Front axle: convertible from 15mm thru axle to Quick Release with included adapters				
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapaters				
Rear axle: 12mm thru axle, convertible to Quick Release with included adapters				

Specifications

Valve hole diameter

リム

• Material : 100% Unidirectional carbon fiber • Material : 100% Unidirectional carbon fiber

- National 100 % office and the about 100 m. Thorit and real bodies . an Down Deilings traditional 5-05 / Update date: 2022-08-2 Axle material : aluminum - Drilling : traditional - Axle material : aluminum

ホイールハブ

•Front and rear bodies : aluminum •Front and rear bodies : aluminum

Adjustable sealed cartridge hearings

ホイールの重み

ホイール重量(クイックリリー スおよびクリンチャー/チュー ブラーを除く)(g): Weight Rear 27.5": 835