
ASTM CATEGORY 3 : offroad with jumps less than 61cm

Recommended weight limit: 120kg

Recommended tire sizes: 35 mm to 69 mm (1.4" to 2.7") Recommended tyre sizes: 46 mm to 64 mm (1.8" to 2.5")

REFERENCES WHEELS

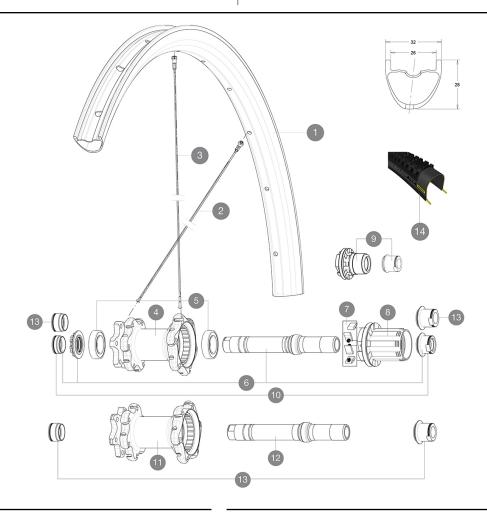

RIMS



$\tilde{\text{A}}\xspace^{\hspace{-0.1cm}2}$ valve hole (MM): 6,5 :

1 V3050113		KIT REAR RIM XA PRO CARBON 27,5"	
	V2700101	UST Tape 28mm for 25 to 27mm wide rims	

SPOKES

2	V2385001	KIT 12 FT/NDS XA PRO CARBON 27,5" SPK 270mm
3	V2384901	KIT 12 DS XA PRO CARBON 27,5" SPK 268mm

HUB SHELLS

4	N/A	HUB BODY
5	M40076	HUB BEARINGS 17x30x7 6903 x 2
6	30870401	REAR QRM + AXLE KIT ITS4 135mm from 2012
7	99610601	PAWLS KIT FOR ITS-4 (OR TS-2)
8	99610701	ITS-4 FREEWHEEL SEAL
8	35126001	ITS-4 FREEWHEEL BODY + SEAL 2013 (NO PAWLS)
9	35684101	FREEHUB BODY XD TS2/ITS-4
11	N/A	HUB BODY
12	V2370801	KIT REAR QRM+ AXLE BOOST ITS-4 148mm

TYRES

14 20242224 Ouget Pro 27 5

ADAPTERS

10	30872201	FRAME SUPPORT ITS-4 135mm REAR AXLE > 2012
13	30859301	AXLE ADAPTER Rr 12x142/148mm Pro Carb MTB (Grey)
	30873101	2 REAR REDUCERS 12/9,5mm 2012 ITS4 HUB

MAVIC XA Pro Carbon

DELIVERED WITH

DELIVERED WITH	
1 bottle of Mavic Sealant (355 466 01) 1	
BX601 quick releases (V24 503 01 frt, V24 504 01 rear) 1	Mayre
BX601 quick releases (V24 503 01 frt, V24 504 01 rear) 1	MAURE MAURE
Front QR adapters (996 941 01 for MTB or B41 043 01 for road) 1	
Front QR adapters (996 941 01 for MTB or B41 043 01 for road) 1	
Rear QR adapters for ITS4 and TS2 (308 731 01)	
Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2) 1	08
Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2) 1	
UST valve and accessories (129 838 01)	ary all the
UST valve and accessories (129 838 01)	ary and the
Tubeless rim tape	
Tubeless rim tape	
Multifonction adjustment wrench (325 423 01) 1	
Multifonction adjustment wrench (325 423 01)	
User guide	
User guide	

COMPATIBILITY

Freewheel: Shimano/Sram or XD	
Freewheel: Shimano/Sram, convertible to XD with optional driver body	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with included adapters	

Specifications

RIMS

- Material: 100% Unidirectional carbon fiber

- Valve hole diameter: 6.5 mm

Material: 100% Unidirectional carbon fiber

Download and 2022-08-25 Download and traditional | / Update date: 2022-08-25 | Drilling: traditional

WHEEL HUB

- Front and rear bodies : aluminum • Front and rear bodies : aluminum

- Axle material : aluminum ■ Axle material: aluminum Adjustable sealed cartridge bearings

WHEEL WEIGHTS

Wheel weight Weight Rear 27.5": 835 Weight Rear 29": 855