


ASTM CATEGORY 4 : offroad with jumps less than 122cm  
 Recommended weight limit : 120kg  
 Recommended tire sizes: 37 mm to 76 mm (1.5" to 3.0")

REFERENCES WHEELS

|        |                            |        |                               |
|--------|----------------------------|--------|-------------------------------|
| R97541 | Dmx Pro 27,5 Rr XD 12x142  | R97561 | Dmx Pro 27,5 Rr Bst XD 12x148 |
| R97551 | Dmx Pro 27,5 Rr Bst 12x148 | R91001 | Dmx Pro 27,5 Rr 12x142        |

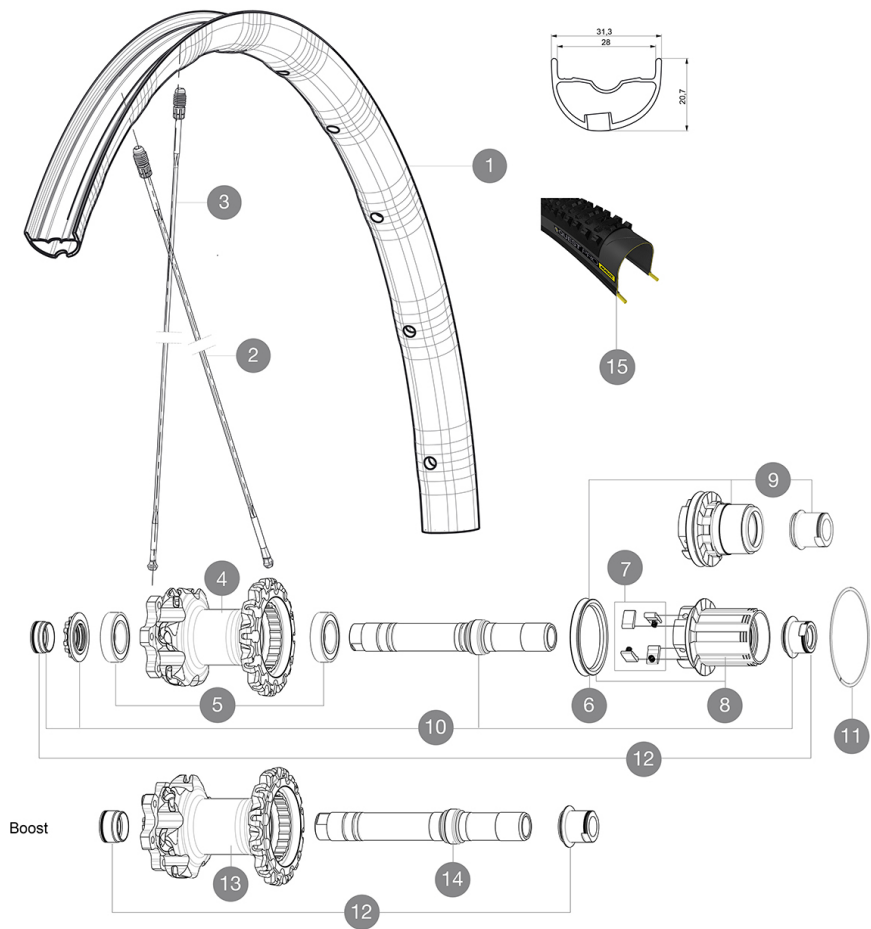

RIMS



VALVE HOLE  $\varnothing$  (MM): 6.5 :

|   |          |                                        |
|---|----------|----------------------------------------|
| 1 | V2316513 | KIT REAR RIM DEEMAX PRO 27,5" 25mm TSS |
|---|----------|----------------------------------------|

SPOKES

|   |          |                                                            |
|---|----------|------------------------------------------------------------|
| 2 | 36675101 | "KIT 10 DS XMAX SLR/END/PRO/DEEMAX PRO 27,5"" SPK 251,5mm" |
| 3 | 36674901 | KIT 12 FT XMAX END/FT-NDS DEEMAX PRO 27,5" ALU SPK 275mm   |

HUB SHELLS

|    |          |                                             |
|----|----------|---------------------------------------------|
| 4  | N/A      | HUB BODY                                    |
| 5  | M40076   | HUB BEARINGS 17x30x7 6903 x 2               |
| 6  | 99610701 | ITS-4 FREEWHEEL SEAL                        |
| 7  | 99610601 | PAWLS KIT FOR ITS-4 (OR TS-2)               |
| 8  | 35126001 | ITS-4 FREEWHEEL BODY + SEAL 2013 (NO PAWLS) |
| 9  | 35684101 | FREEHUB BODY XD TS2/ITS-4                   |
| 10 | 30870401 | REAR QRM + AXLE KIT ITS4 135mm from 2012    |
| 11 | 30871801 | ELASTIC RING 56mm diam. ITS-4 20 SPOKES     |
| 13 | N/A      | HUB BODY                                    |
| 14 | V2371201 | KIT REAR QRM AXLE 135-142 / BOOST 148mm     |


TYRES

|    |          |                        |
|----|----------|------------------------|
| 15 | 39243624 | Quest Pro XL Tire 27.5 |
|----|----------|------------------------|

ADAPTERS

|    |          |                                            |
|----|----------|--------------------------------------------|
| 12 | 30872201 | FRAME SUPPORT ITS-4 135mm REAR AXLE > 2012 |
|----|----------|--------------------------------------------|

**DELIVERED WITH**

|                                                                                           |                                                                                   |
|-------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| 1 bottle of Mavic Sealant<br>(355 466 01)<br>1                                            |  |
| Rear 12x142mm adapters for ITS4 and TS2<br>(308 593 01 for ITS4, 329 650 01 for TS2)<br>1 |  |
| UST valve and accessories<br>(129 838 01)                                                 |  |
| Multifunction adjustment wrench<br>(325 423 01)<br>1                                      |  |
| User guide                                                                                |                                                                                   |

**COMPATIBILITY**

|                                                                                     |  |
|-------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to XD with optional driver body                |  |
| Front axle: convertible from 15mm thru axle to Quick Release with optional adapters |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters      |  |

**Specifications****RIMS**

- **Drilling** : Fore
- **Valve hole diameter** : 6.5 mm
- **Tire** : UST Tubeless and tubetype
- **Internal width** : 28 mm front and 25mm rear
- **ETRTO size 27.5"** : 584x28ss front & 584x25ss rear

Hookless profile

**SPOKES**

- **Material** : Zicral
- **Shape** : straight pull, bladed
- **Count** : 24 front and rear
- **Lacing** : front crossed 2, rear Isopulse

**WHEEL HUB**

- **Front and rear bodies** : aluminum
- Adjustable sealed cartridge bearings
- **Freewheel** : ITS-4 alloy

**VERSIONS**

- **Color** : Black only
- **Disc standard** : 6 Bolts only
- **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)

**WHEEL WEIGHTS**

Wheel weight 890