

ASTM CATEGORY 3 : offroad with jumps less than 61cm

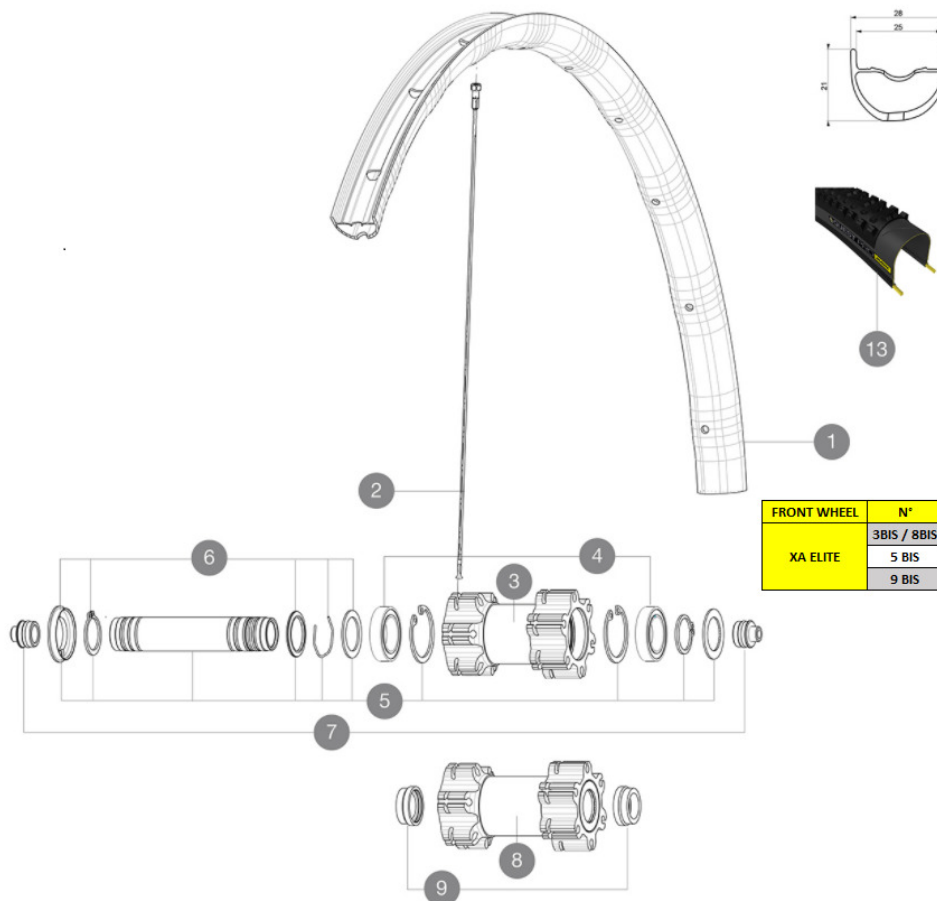
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included

Recommended tyre sizes: 35 mm to 69 mm (1.4" to 2.7")

Recommended tyre sizes: 46 to 64 mm (1.8" to 2.5")

参照ホイール

F70221	XaEl29FtBlk	F70392	XaEl29FtBstGm
F70222	XaEl29FtGm	F70393	XAEI29FtBstBlu
F70223	XaEl29FtBlu	F70401	XaEl29FtLefty60Blk
F70391	XaEl29FtBstBlk		



FRONT WHEEL	N°	PARTS	REFERENCE	REFERENCE BOOST
XA ELITE	3 BIS / 8 BIS	HUB BODY	N/A	N/A
	5 BIS	AXLE	V2372301	V2372401
	9 BIS	ADAPTORS	V2372501	

RIMS



Ä□□Ä□«Ä□□Ç©'Ä¼□ï¼□MMï¼□ï¼□6,5 :

1	V3010115	KIT FRONT/REAR RIM XA ELITE 29" 25mm GREEN TUBELESS
1	V2990115	KIT FRONT/REAR RIM XA ELITE 29" 25mm BLACK TUBELESS
1	V3030115	KIT FRONT/REAR RIM XA ELITE 29" 25mm BLUE TUBELESS
	V2700101	85T Tape 28mm for 25 to 27mm wide rims

SPOKES

2	V2381401	KIT 12 FT/RR BUTTED SPOKES 296mm MTB 29"
---	----------	--

HUB SHELLS

3	N/A	HUB BODY
3	N/A	HUB BODY
3	N/A	HUB BODY
	N/A	HUB BODY
4	99688501	BEARING KIT 9/15 D6T HUB
5	V2371101	KIT FRONT QRM AXLE 100mm/BOOST 110mm
5	V2370101	KIT FRONT AXLE 15MM CROSSONE/-RIDE/-ROC - while stock last
	V2372301	KIT 100mm AXLE QRM AUTO MTB > 2019
	V2372401	KIT 110mm AXLE QRM AUTO MTB > 2019
6	V2370301	FRONT AUTO ADJUST.PLAY KIT 15MM AXLE
8	N/A	HUB BODY
8	N/A	HUB BODY
8	N/A	HUB BODY

	N/A	HUB BODY
10	N/A	HUB BODY
11	M40771	BEARING KIT FOR LEFTY HUB
12	36709301	ASSEMBLY KIT CROSSROC SUPERMAX



TYRES

13	39243433	Quest Pro 29x2.35
----	----------	-------------------

ADAPTORS

7	B4104401	15mm FT Road Axle Adapters 16
9	V2371301	YELLOW AXLE SUPPORTS FRONT BOOST 110mm FOR SELF
	V2372501	ADJUSTING AXLE 15mm MTB Axle Cap QRM Auto From 2019

付属品

1 bottle of Mavic Sealant (355 466 01) 1	
BR101 quick releases (M40350 frt, M40351 rear road, M40352 rear MTB) 1	
Front QR adapters (996 941 01 for MTB or B41 043 01 for road) 1	
Rear QR adapters for ITS4 and TS2 (308 731 01) 1	
Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2) 1	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
Tubeless rim tape	
Tubeless rim tape	

COMPATIBILITY

Freewheel: Shimano/Sram or XD	
Freewheel: Shimano/Sram, convertible to XD with optional driver body	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Rear axle: convertible from Quick Release to 12mm thru axle with included adapters	
Rear axle: convertible from Quick Release to 12mm thru axle with included adapters	

Specifications

リム

- Material : Maxtal
 - Material : Maxtal
 - Joint : SUP
 - Joint : SUP
 - Drilling : traditional
 - Drilling : traditional
 - Weight reduction : ISM 4D
 - Weight reduction : ISM 4D
 - Valve hole diameter : 6.5 mm
 - Valve hole diameter : 6.5 mm
 - Tyre : UST Tubeless and tubetype
 - Tyre : UST Tubeless and tubetype
 - Internal width : 25 mm
 - Internal width : 25 mm
 - ETRTO size 27.5" : 584x25ss
 - ETRTO size 27.5" : 584x25ss
 - ETRTO size 29" : 622x25ss
 - ETRTO size 29" : 622x25ss
- Hookless profile
Hookless profile
Use with Mavic Tubeless Tape
Use with Mavic Tubeless Tape

スポーク

- Material : steel
- Material : steel
- Shape : straight pull, bladed, double butted
- Shape : straight pull, bladed, double butted
- Count : 24 front and rear
- Count : 24 front and rear
- Lacing : front and rear crossed 2
- Lacing : front and rear crossed 2

ホイールハブ

- Front and rear bodies : aluminum
- Front and rear bodies : aluminum
- Axle material : aluminum
- Axle material : aluminum
- Sealed cartridge bearings
- Sealed cartridge bearings
- Freewheel : ITS-4 alloy
- Freewheel : ITS-4 alloy

VERSIONS

- Color : Black or Black/Blue or Black/Green
 - Color : Black or Black/Blue or Black/Green
 - Disc standard : 6 Bolts only
 - Disc standard : 6 Bolts only
 - Hub width : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
 - Hub width : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- Lefty Supermax
Lefty Supermax

ホイールの重み

ホイール重量 (クイックリリー
スおよびクリンチャー/チュー
ブラーを除く) (g) :
Weight Front 27.5": 780
Weight Front 29": 815