


ASTM CATEGORY 3 : offroad with jumps less than 61cm
Recommended weight limit : 120kg
Recommended tire sizes: 35 mm to 69 mm (1.4" to 2.7")
Recommended tyre sizes: 46mm to 64mm (1.8" to 2.5")

REFERENCES WHEELS

F70221	XaEl29FtBlk	F70392	XaEl29FtBstGm
F70222	XaEl29FtGm	F70393	XAEI29FtBstBlu
F70223	XaEl29FtBlu	F70401	XaEl29FtLefty60Blk
F70391	XaEl29FtBstBlk		

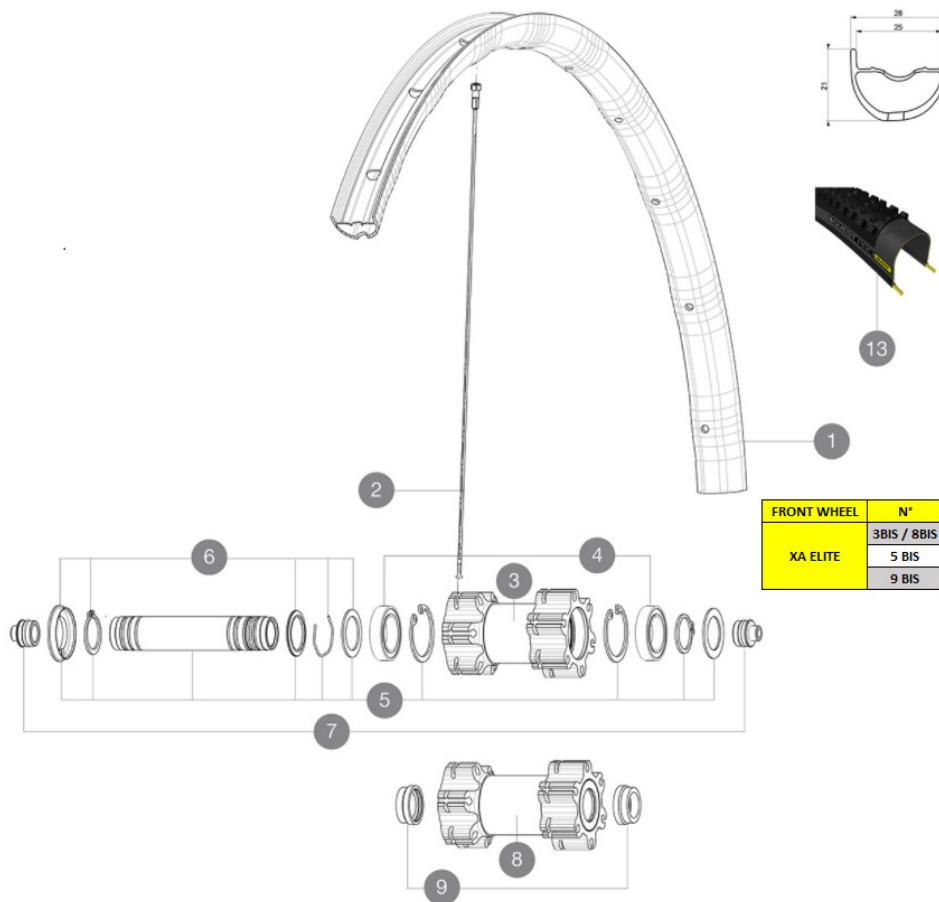

FRONT WHEEL	N°	PARTS	REFERENCE	REFERENCE BOOST
XA ELITE	3BIS / 8BIS	HUB BODY	N/A	N/A
	5 BIS	AXLE	V2372301	V2372401
	9 BIS	ADAPTORS	V2372501	

RIMS



VALVE HOLE (MM): 6,5 :

1	V2990115	KIT FT/RR RIM XA ELITE 29" 25mm BLACK TSS
1	V3030115	KIT FT/RR RIM XA ELITE 29" 25mm BLUE TSS
1	V3010115	KIT FT/RR RIM XA ELITE 29" 25mm GREEN TSS
	V2700101	UST Tape 28mm for 25 to 27mm wide rims

SPOKES

2	V2381401	KIT 12 FT/RR BUTTED SPOKES 296mm MTB 29"
---	----------	--

HUB SHELLS

3	N/A	HUB BODY
3	N/A	HUB BODY
3	N/A	HUB BODY
	N/A	HUB BODY
4	99688501	BEARING KIT 9/12/15 D6T HUB 20x32x7 6804
5	V2371101	KIT FRONT QRM AXLE 100mm/BOOST 110mm
5	V2370101	KIT FRONT AXLE 15MM CROSSONE/-RIDE/-ROC - while stock last
	V2372301	KIT 100mm AXLE QRM AUTO MTB > 2019
	V2372401	KIT 110mm AXLE QRM AUTO MTB > 2019
6	V2370301	KIT FRONT AUTO ADJUSTING PLAY 15mm AXLE
8	N/A	HUB BODY
8	N/A	HUB BODY
8	N/A	HUB BODY
	N/A	HUB BODY

10	N/A	HUB BODY
11	M40771	BEARING KIT FOR LEFTY 50 & 60 HUB
12	36709301	ASSEMBLY KIT FOR LEFTY SUPERMAX WHEELS

TYRES

13	39243433	Quest Pro 29
----	----------	--------------

ADAPTORS

7	B4104401	ADAPTER Ft 15mm QRM+
9	V2371301	YELL FT AXLE SUPPORT BOOST 110mm SELF ADJUST
	V2372501	15mm MTB Axle Cap QRM Auto From 2019

MAVIC *XA Elite 29***DELIVERED WITH**

1 bottle of Mavic Sealant (355 466 01) 1	
BR101 quick releases (M40350 firt, M40351 rear road, M40352 rear MTB) 1	
Front QR adapters (996 941 01 for MTB or B41 043 01 for road) 1	
Rear QR adapters (308 731 01) 1	
Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2) 1	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
Tubeless rim tape	
Tubeless rim tape	

COMPATIBILITY

Freewheel: Shimano/Sram, convertible to XD with optional driver body	
Freewheel: Shimano/Sram or XD	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Rear axle: convertible from Quick Release to 12mm thru axle with included adapters	
Rear axle: convertible from Quick Release to 12mm thru axle with included adapters	

Specifications**RIMS**

- **Material** : Maxtal
- **Material** : Maxtal
- **Joint** : SUP
- **Joint** : SUP
- **Drilling** : traditional
- **Drilling** : traditional
- **Weight reduction** : ISM 4D
- **Weight reduction** : ISM 4D
- **Valve hole diameter** : 6.5 mm
- **Valve hole diameter** : 6.5 mm
- **Tire** : UST Tubeless and tubetype
- **Tire** : UST Tubeless and tubetype
- **Internal width** : 25 mm
- **Internal width** : 25 mm
- **ETRTO size 27.5"** : 584x25ss
- **ETRTO size 27.5"** : 584x25ss
- **ETRTO size 29"** : 622x25ss
- **ETRTO size 29"** : 622x25ss
- Hookless profile
- Hookless profile
- Use with Mavic Tubeless Tape
- Use with Mavic Tubeless Tape

SPOKES

- **Material** : steel
- **Material** : steel
- **Shape** : straight pull, bladed, double butted
- **Shape** : straight pull, bladed, double butted
- **Count** : 24 front and rear
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2
- **Lacing** : front and rear crossed 2

WHEEL HUB

- **Front and rear bodies** : aluminum
- **Front and rear bodies** : aluminum
- **Axle material** : aluminum
- **Axle material** : aluminum
- Sealed cartridge bearings
- Sealed cartridge bearings
- **Freewheel** : ITS-4 alloy
- **Freewheel** : ITS-4 alloy

VERSIONS

- **Color** : Black or Black/Blue or Black/Green
- **Color** : Black or Black/Blue or Black/Green
- **Disc standard** : 6 Bolts only
- **Disc standard** : 6 Bolts only
- **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- Lefty Supermax
- Lefty Supermax

WHEEL WEIGHTS

- Wheel weight
- Weight Front 27.5": 780
- Weight Front 29": 815