

ASTM CATEGORY 1 : road only


For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included

Recommended tyre sizes: 23 to 32 mm

Max. Pressure: 23mm 8.7 bars - 125 psi, 25mm 7.7 bars - 110 psi

参照ホイール

F70771 CXREliteDCLFt12x100

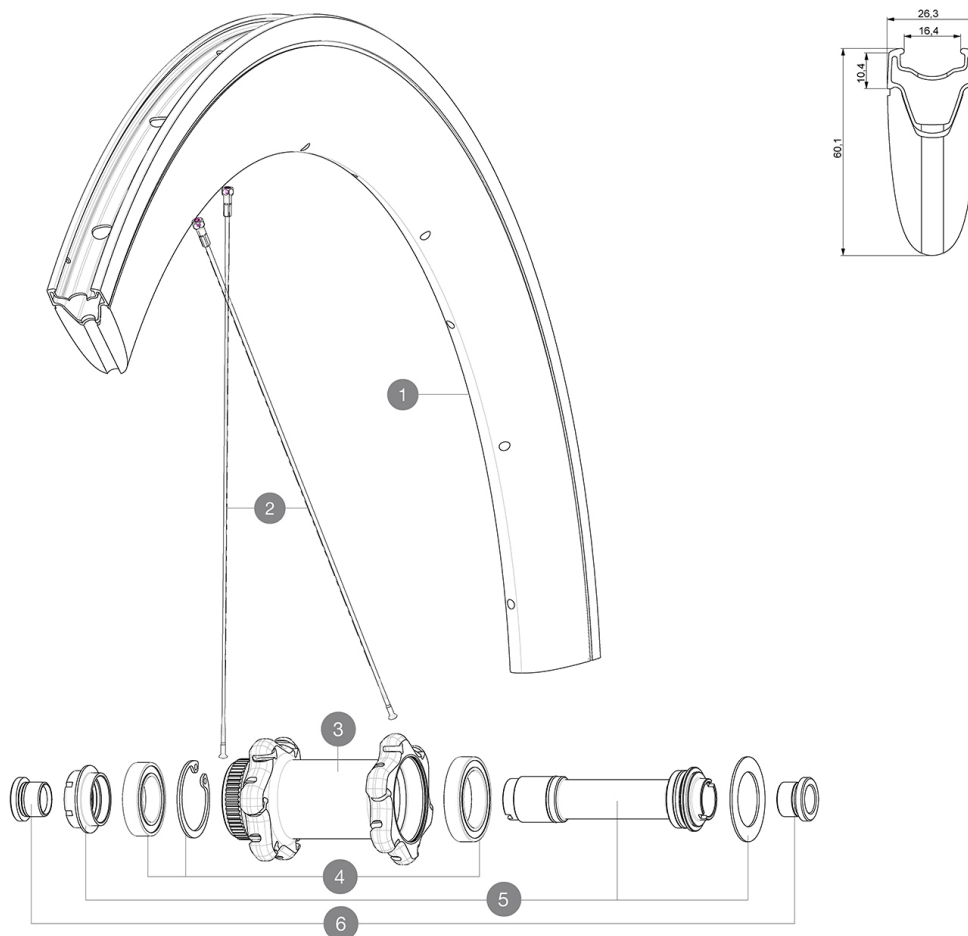

RIMS



Ä□□Ä□«Ä□□Ç©'Ä¼□ÿ¼□MMÿ¼□ÿ¼□6.5 :

| | | |
|---|----------|-------------------------------------------------|
| 1 | V2408510 | KIT FRONT RIM CXR ELITE DISC - until stock last |
| | V2690201 | KIT CARBON RIM TAPE 18x622mm (SPECIAL RIM TAPE) |

SPOKES

| | | |
|---|----------|--------------------------------------------------------------|
| 2 | V2275201 | KIT 12 REAR NON-DRIVE SIDE & FRONT DISC & REAR DISC side BUT |
|---|----------|--------------------------------------------------------------|

HUB SHELLS

| | | |
|---|----------|------------------------------------------------------|
| 3 | N/A | HUB BODY |
| 4 | 99688601 | BEARING KIT 9/15 DCL HUB 20x32x7 6804 + 25x37x7 6805 |
| 5 | V2390701 | KIT FRONT 12mm AXLE QRM+ CL |






ADAPTERS

| | | |
|---|----------|-------------------------------|
| 6 | B4104201 | 12mm FT road Axle Adapters 16 |
| | B4104301 | 9mm FT road Axle Adapters 16 |
| | B4104401 | 15mm FT Road Axle Adapters 16 |



CXR Elite Disc

付属品

| | |
|---------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| Front 12 mm adapters (B4104201) 1 |  |
| Rear 12x142mm adapters for Instant Drive 360 (B49 896 01 for ID360 6T, B49 899 01 for ID360 CL) 1 |  |
| Valve extender (118 952 01) 1 |  |
| Specific disc bolts (308 719 01) Pack of 6 |  |
| Rim tape | |
| Multifunction adjustment wrench (325 423 01) 1 |  |
| User guide | |

COMPATIBILITY

| | |
|-------------------------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies | |
| Front axle: convertible from 12mm thru axle to quick release or 15mm thru axle with optional adapters | |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters | |

Specifications

リム

- Material : Maxtal alloy with Blackcell flange
- Height : 60 mm
- Drilling : traditional
- Disc brake specific profile
- Valve hole diameter : 6.5 mm
- Tyre : clincher
- Internal width : 16 mm
- ETRTO size : 622x16C

スポーク

- Material : steel
- Shape : straight pull, bladed, double butted
- Nipples : aluminum, ABS
- Count : 24 front and rear
- Lacing : front crossed 2, rear Isopulse

ホイールハブ

- Front and rear bodies : aluminum
- Axle material : aluminum
- Sealed cartridge bearings
- Freewheel : Instant Drive 360
- Front : Quick release, 12 and 15mm through axle compatible
- Rear : convertible to 12mm through axle (135 and 142)

VERSIONS

- Color : Black only
- Disc standard : 6 Bolts or Center Lock(R)

ホイールの重み

ホイール重量 (クイックリリース
スおよびクリンチャー/チュー
ブラーを除く) (g) : 945