

ASTM E1300 1/4 inch axle diameter 1 : 1/4 inch axle diameter


For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included

Recommended tyre sizes: 21 to 28 mm

23mm 8.7 bars - 125 psi

参照ホイール

F70741 IO 17 700

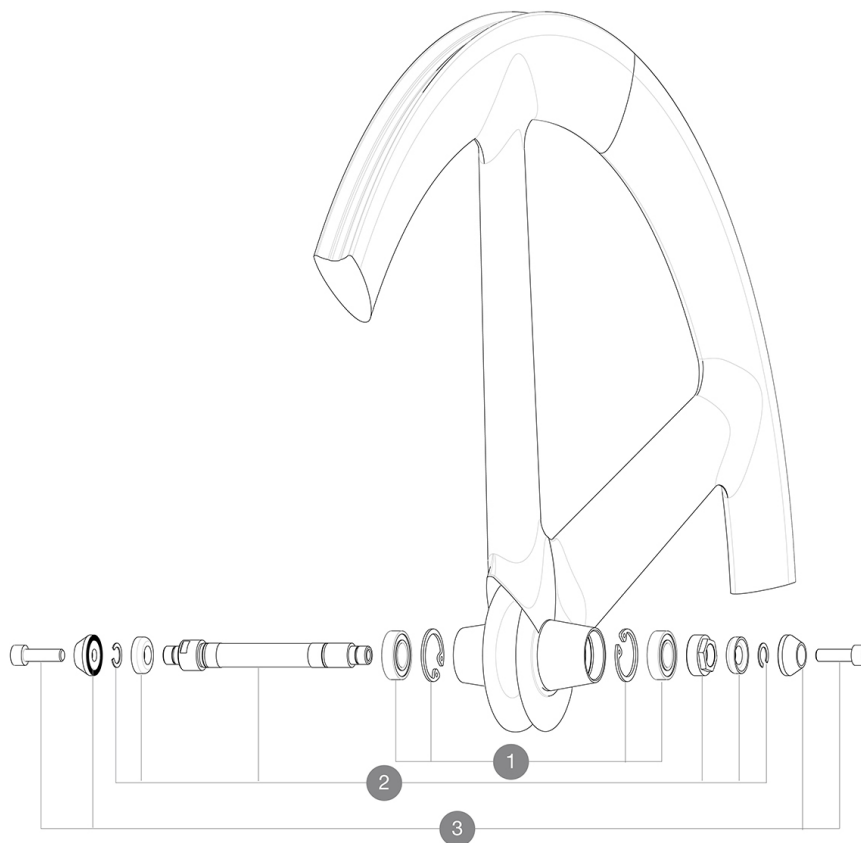



















HUB SHELLS

|   |        |  |
|---|--------|--|
| 1 | M40131 | KIT BEARINGS FRONT 12x24x6 6901 (IO track) |
| 2 | M40130 | FRONT IO AXLE + ADJUSTING NUT              |
| 3 | M40124 | M6 AXLE BOLTS FRT TRACK WHEEL              |



ADAPTERS

|          |                                      |
|----------|--------------------------------------|
| V2372501 | 15mm MTB Axle Cap QRM Auto From 2019 |
|----------|--------------------------------------|

付属品

|                                     |   |
|-------------------------------------|---|
| Fixing nuts<br>(M40124)<br>1        |    |
| Fixing nuts<br>(M40124)<br>1        |    |
| Fixing nuts<br>(M40124)<br>1        |    |
| Fixing nuts<br>(M40124)<br>1        |    |
| Fixing nuts<br>(M40124)<br>1        |    |
| Fixing nuts<br>(M40124)<br>1        |    |
| Fixing nuts<br>(M40124)<br>1        |   |
| Valve extender<br>(118 952 01)<br>1 |  |
| Valve extender<br>(118 952 01)<br>1 |  |
| Valve extender<br>(118 952 01)<br>1 |  |
| Valve extender<br>(118 952 01)<br>1 |  |
| Valve extender<br>(118 952 01)<br>1 |  |
| Valve extender<br>(118 952 01)<br>1 |  |
| Valve extender<br>(118 952 01)<br>1 |  |
| Valve extender<br>(118 952 01)<br>1 |  |
| Wheelbag<br>(V24 801 01)<br>1       |  |
| Wheelbag<br>(V24 801 01)<br>1       |  |
| Wheelbag<br>(V24 801 01)<br>1       |  |

COMPATIBILITY
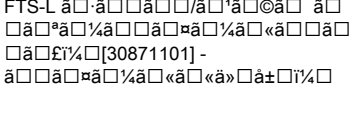
|            |  |
|------------|--|
| ID360 XD-R |  |
| FTS-L      |  |